MIL-B-2059D
18 September 1974
SUPERSEDING
MIL-B-2059C
8 June 1967

MILITARY SPECIFICATION

BAG, WARDROBE: FOR PATIENTS CLOTHING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirement for one type and size of wardrobe bag.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

	L-P-375	- Plastic Film, Flexible, Vinyl Chloride
	V-F-106	- Fasteners, Slide, Interlocking.
	V-T-285	- Thread, Polyester.
	QQ-W-461	- Wire, Steel, Carbon (Round, Bare and Coated).
*	PPP-B-636	- Boxes, Shipping, Fiberboard.
	PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

MILITARY

*	MIL-E-20653/1	- Eyelets, Metallic, Rolled Flange Type; and Eyelet Washer.

STANDARDS

FEDERAL

	FED-STD-595	- Colors.
	FED-STD-751	- Stitches, Seams and Stitching.

FSC 7290

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

DRAWING

ARMY NATICK LABORATORIES

2-3-19 - Bag, Wardrobe; For Patients Clothing.

(Miniature copy of Drawing No. 2-3-19, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Vinyl film. The material used in the body of the bag and for seam binding shall be unsupported vinyl film, 0.006 inch thick, conforming to type I, class 2 of L-P-375. The color of the film shall approximate Color No. 34087, Olive Drab, lusterless of FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

* 3.1.2 Thread. The thread shall be type I, class 1, sub-class A, size FF or size E conforming to V-T-285. The thread shall be shade S-1, Cable No. 66022, and shall show fastness to light when tested as specified in V-T-285.

3.1.3 Hardware.

3.1.3.1 Frames, top and bottom. Top and bottom frames shall be fabricated of wire in the sizes specified on the drawing and shall be steel No. 1010-1020, finish 1, conforming to QQ-W-461.

3.1.3.1.1 Finish. The finish shall be applied after fabrication. The frames shall be metal plated or painted in accordance with the manufacturer's standard practice.

* 3.1.3.2 Eyelets and washers. The eyelets and washers shall be of the sizes specified on the drawing and shall conform to the requirements of MIL-E-20652/1.

* 3.1.3.3 Fasteners, slide, interlocking. The slide fasteners shall be type I, style 7, size M, 53-1/2 inches long, with brass, or zinc chain, and shall conform to V-F-106. The tape shall be Olive Drab, shade S, Cable No. 66519, and shall be water-repellent and mildew-resistant treated.

3.2 Design and dimensions. The wardrobe bag shall conform to the design and dimensions shown on Drawing No. 2-3-19.

3.3 Construction. The wardrobe bag shall be constructed as specified herein and as detailed in Drawing No. 2-3-19.

* 3.3.1 Stitching . All stitching shall conform to type 301 of FED-STD-751 and there shall be 5 to 6 stitches per inch for size FF thread or 7 to 8 stitches per inch if size E thread is used. When machine stitching is not a continuous thread, it shall be back-stitched not less than 1 inch at each break. All stitching shall be backstitched at the ends to prevent raveling, except when the ends are turned under a hem or held down by other stitching. Thread tension shall be properly maintained so that the lock will be embedded in the center of the materials sewed. All ends of outside stitching shall be trimmed, and all loose threads, spots and stains removed.

3.3.2 Eyelet. The eyelet shall be positioned as shown on Drawing No. 2-3-19 and securely clinched through the reinforcement piece centered on the inside of the bag. The edges of the reinforcement piece shall be secured with a row of stitching on each edge, 1/8 $\pm$ 1/16 inch from the raw edge.

3.3.3 Welds. All welds shall be sound and smooth.

3.4 Marking for identification. Marking shall be in accordance with the provisions of MIL-STD-130. The letters "US" shall be located upon one surface at approximately the center as shown on Drawing No. 2-3-19. Identification marking as required by MIL-STD-130 shall be located below the "US".

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. The wardrobe bags shall be clean, and shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Inspection of components. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.2.2 Inspection of the end item.

4.2.2.1 Visual examination. The completely assembled end item shall be examined for defects in finish, material, construction, workmanship and marking. Defects shall be classified as listed in table I. The lot shall be expressed in units of one bag each. The sample unit shall be one bag. The inspection level shall be level II and the acceptable quality level (AQL) shall be 2.5 for major defects and 6.5 for total defects, expressed as defects per hundred units.

TABLE I. Classification of end item - visual defects

Examine	Defect	Classification Major	Minor
Vinyl film	Not approximately Color 34087.		X
	Not uniform in color and finish.		X
	Any cut, tear, hole, burn or crack.	X	
	Any bubbles, sharp crease, blisters or thin spots.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of end item - visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Vinyl film (cont'd)	Any patch, splice or repair.	X	
	Any foreign matter.	X	
	Any spot, stain or other discoloration affecting appearance.		X
Construction and workmanship, general (applicable to all components and assemblies)	Any component omitted.	X	
	Any component misplaced, damaged defective, operation omitted or not properly performed, affecting serviceability.	X	
	Any component defective or operation omitted, not affecting serviceability.		X
	Sharp burr, sliver or splinter.	X	
	Not connected or joined as specified or poorly accomplished, affecting serviceability.	X	
Welds	Missing, incomplete, burn holes, cracked, fractured or otherwise not fused.		X
	Slag inclusion, slight undercut, not smooth and uniform, scale or flux deposits not removed.	X	
(Finish on frame)	Not metal plated or painted as specified.		X
Stitching	Not specified seam or stitch type	X	
	More or less stitches per inch than specified.		X
	Any seam puckered, pleated, or twisted, affecting appearance.		X
	Thread breaks or ends of stitching not backstitched.		X
	Loose threads or untrimmed ends on outside of bag alignment.	X	
Marking	Missing, incomplete, not legible, not specified type or size, not in proper location, not stenciled or printed.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination. The end item shall be examined for defects in dimensions. Any dimension that is not within the established tolerance shall be classified a defect. The inspection level shall be S-2 with an AQL of 6.5, expressed as defects per hundred units. The lot size shall be expressed in units of one bag each and the sample unit shall be one bag.

4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing and marking complies with the section 5 requirements. Defects shall be as listed in table II. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in defects per 100 units.

TABLE II. Packaging and packing visual defects

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, improper taping or inadequate stapling. Bulged or distorted container.
Contents	Number per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Frames. The top frame, positioned with the cross member up and the hook horizontal, shall be secured to the bottom frame with pressure-sensitive tape.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

5.1.1.2 Bag, only. Each bag, with slide fastener closed, shall be laid out flat, face up. The top and bottom panels shall be tucked in and the side panels folded over full width on the bag face. The bag shall form a rectangle measuring approximately 54 by 24 inches. The bag shall be folded in thirds, parallel with the length, and then folded in half across the length to measure approximately 27 by 8 inches.

* 5.1.1.3 Bag, complete. The frame, with the cross member up, shall be placed in a corrugated fiberboard box. The folded bag shall then be placed on top of the frame. The fiberboard box shall conform to style FPF, type CF (variety SW), class domestic, grade 200 of PPP-B-636. Inside dimensions of the box shall approximate 8-1/4 inches in length, 2-1/2 inches in width, and 28-1/4 inches in depth. Approximate dimensions are furnished as a guide only. The fiberboard box shall be securely closed with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

* 5.1.2 Level C (Commercial packaging). Each bag shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A. Twelve bags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed flat, one in length, two in width and six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 29-1/4 inches in length, 17-1/2 inches in width and 16-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification.

* 5.2.2 Level B. Twelve bags, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, one in length, two in width and six in depth within a shipping container. Inside dimensions of each shipping container shall approximate 29-1/4 inches in length, 17-1/2 inches in width and 16-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

* 5.2.3 Level C (commercial packing). Bags packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The wardrobe bag is intended for use in storage of patient's clothing.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Whether preproduction sample is required (see 3.1)
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

* 6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activity:

Army - MD

User activities:


Navy - MS
Air Force - 03

Preparing activity:

Army - GL

Project No. 7290-0036

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

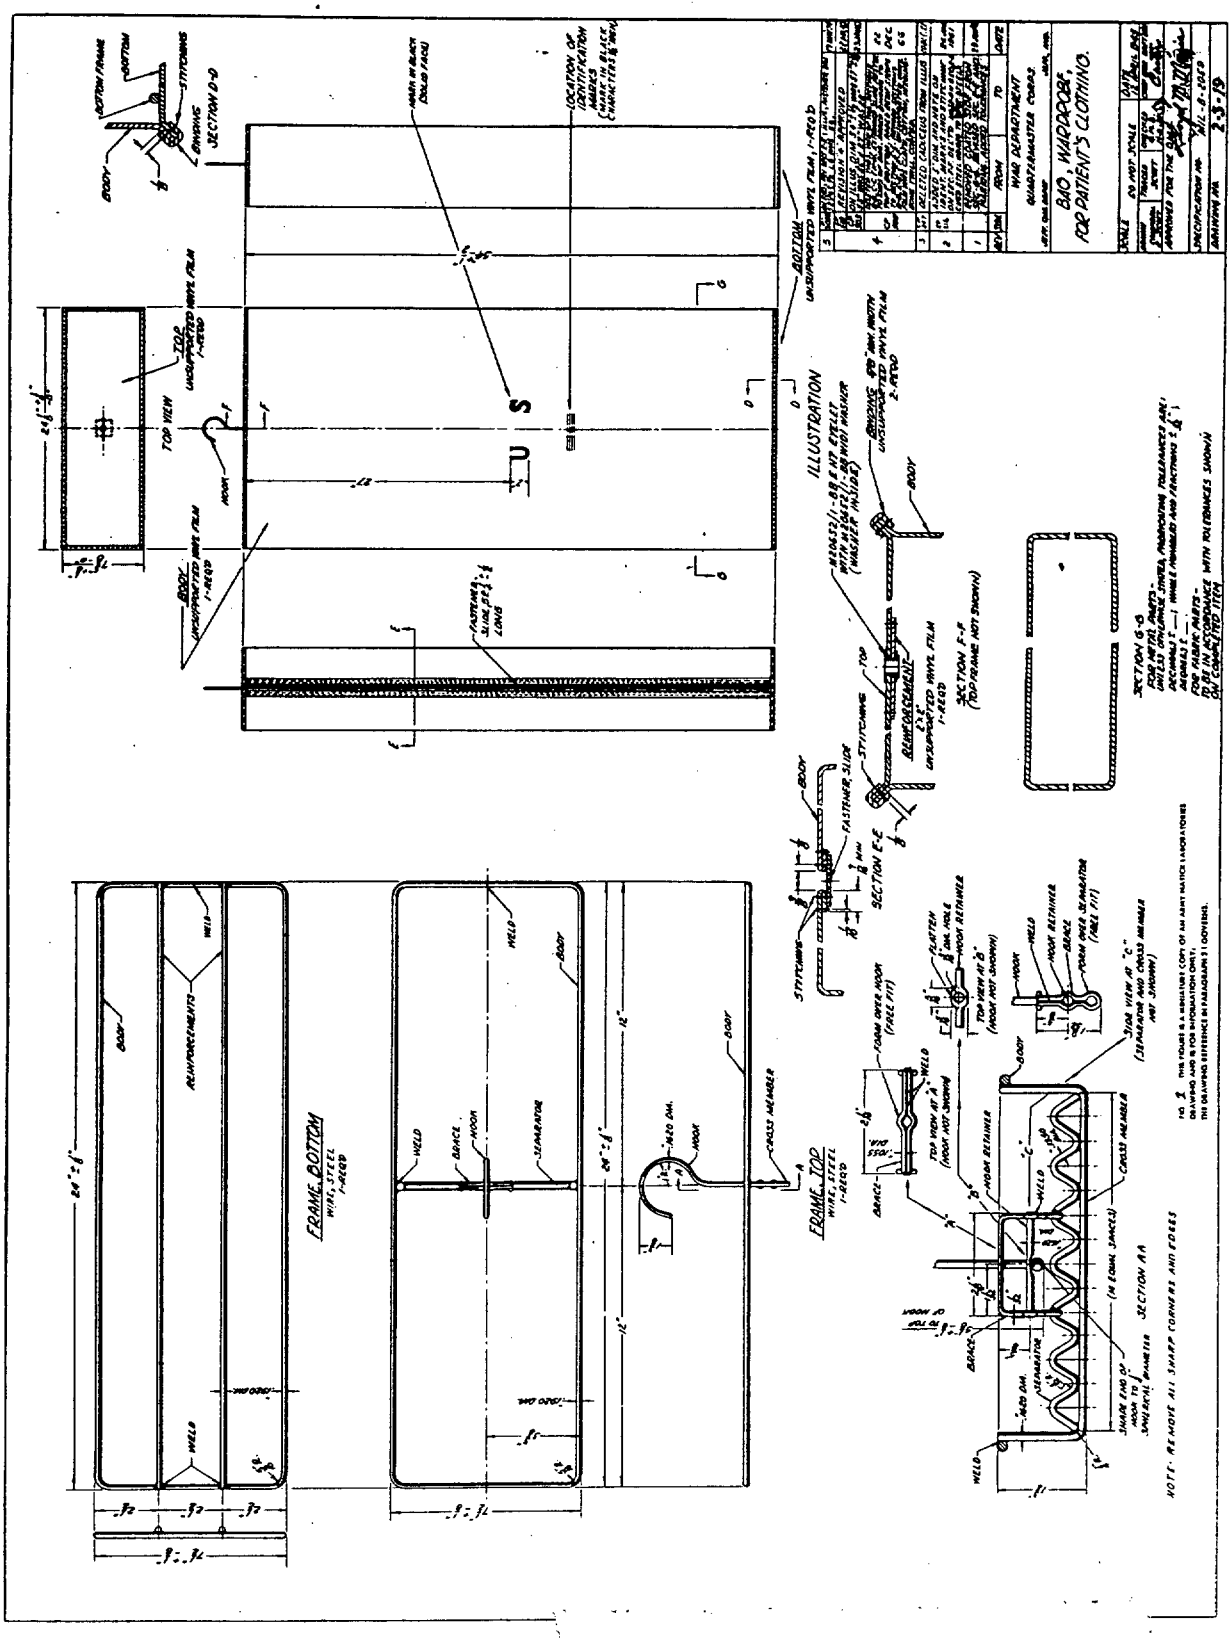

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-B-2059D - BAG, WARDROBE: FOR PATIENTS CLOTHING

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:17Z
Check the source to verify that this is the current version before use.