INCH-POUND

MIL-DTL-2071E
23 August 2024
SUPERSEDING
MIL-F-2071D
30 September 1976

DETAIL SPECIFICATION SHEET

# FLAG, NATIONAL, UNITED STATE OF AMERICA, GRAVE DECORATING, PRINT CLOTH

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope: This specification covers one type of, and size of US National Flag used for grave decorating.

## 2. APPLICABLE DOCUMENTS:

2.1 Government Document:

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to extent specification herein. Unless otherwise specified, the issue of these documents will be these listed in the issue of the Department of Defense Index of specifications and standards and supplement thereto, cited in the solicitation.

FEDERAL STANDARDS

FED-STD-191 - Textile Test Methods

COMMERCIAL ITEM DESCRIPTION

A-A-203 – Paper, Kraft, Wrapping
A-A-50155 – Cloth, Muslim, Cotton
A-A-1671 – Tape, Gummed, Paper, Reinforced and Plain. For Sealing and Securing
A-A-52094 – Thread, Cotton

Comments, suggestions, or questions on this document should be addressed to Department of the Army, The Institute of Heraldry, Technical and Production Division, 9325 Gunston Road, Building 1466, Room S112, Fort Belvoir, VA 22060-5579 or usarmy.belvoir.hqda.mbx.tioh-webmaster. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 8345

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1916 – DOD Preferred Methods for Acceptance of Product
MIL-STD-129 – Military Marking for shipment and Storage

(Copies of these documents are available online at https://assist.dla.mil.)

2.1.2 Other Government document, drawings and publications. The following other documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issue will be those in effect on the date of the solicitation.

DRAWING

THE INSTITUTE OF HERALDRY

5-1-17 – Flag, National; United State of America; 50 Star Union Jack
(See Figure 1)

(Copies of specifications, Standards and Drawings required by the supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figure 1 is a miniature reproduction of drawing 5-1-17 and is attached for information purpose only.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of documents are those cited in the solicitation or contract.

ASTM INTERNATIONAL

ASTM-D5118/D5118M – Boxes, Shipping Fiberboard
ASTM-D-6193 – Stich, Seam and Stitching
ASTM-D-4689 – Adhesive, casein-type, water and mold Resistant

(These standards can be obtained from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or www.astm.org.)

2.3 Other Publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted will be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS will be the issue of the nongovernment documents which is current on the date of the solicitation.

THE COLOR ASSOCIATION OF THE UNITED STATES

The Standard Color Reference of America, Tenth Edition
United States Army Color Card, the Official Colors for Branches, Agencies

(Application for copies of the aforementioned documents should be addressed to the color Association of the United States, 343 Lexington Avenue, New York, NY 10016.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

(Nongovernment standards and other publications are normally available from the organizations which prepare, or which distribute the documents. These documents also may be available in or through libraries or other informational service.)

2.4 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (except for associated detail specifications, specification sheet or MS standards) the text of this specification will take precedence. Nothing in this specification, however, will supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Unless otherwise specified (see 6.2), the contacting officer shall furnish a standard samples for matching color shades and colorfastness to water and weathering only.

3.2 First article. When otherwise specified (see 6.2), before production is commenced, a sample of the finished flag shall be submitted or made available to the contracting officer or his authorized representative for inspection and test as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contactor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacturing of the production items.

3.3 Materials. Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Cloth Cotton. The base cloth shall conform to type VI, class 2 of A-A-50155, with the following exceptions:

a. Colorfastness to light, laundering, bleaching, perspiration, and crocking shall not apply.

b. The non-fibrous material in the cloth shall not exceed 6.2 percent.

c. The shrinkage shall not exceed 6.0 percent in the wrap direction and 8.2 percent in the filling direction.

d. The filling picks per inch shall be 56 plus or minus 5.

3.3.1.1 Printing. The flag design (see 3.4) shall be printed so that the wrap threads of the muslin shall be in the fly (longitudinal) direction of the flag. All sides of the canton or union shall be parallel or perpendicular to the sides of the flag. The various areas of the design shall be properly registered with respect to each other and present defined sharp demarcations with a minimum of feathering. All areas of the design shall have solid coverage. The star group shall be equidistant from each side of the canton (after the hems have been formed).

3.3.1.2 Color. The colors of the flag shall conform to the Standard Color Card of America (see 2.2). The colors shall be as follows:

Old Glory Blue – Cable No. 70075
Old Glory Red – Cable No. 70180
White -- Cable No. 70001

3.3.1.3 Colorfastness. The flag shall show colorfastness to weathering equal to or better



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

than the standard sample. When a standard sample is not available, the finished flag shall show good colorfastness to weathering.

3.3.2 Thread. The thread for stitching the hems shall be white, soft finish, cotton, machine thread and shall be not finer than No. 50, 3 ply, type 1A2 of V-T-276.

3.3.3 Wood. The wood for the staff shall be clear, straight grained well-seasoned hardwood conforming A-A-2208. Any of the following wood species may be used.

| | |
|---|---|
| Ash (White) | Locust (Black) |
| Beech | Maple, hard (Sugar or Black) |
| Birch (Sweet or Yellow) | Oak (Red or White) |
| Elm (Rock) | Pecan |

3.3.4 Staples. Staples shall be bright, blued or zinc-coated steel wire not less than .021 inch in diameter. The staples shall be of the size and leg length to securely attach the flag to the flagstaff.

3.4 Design. The design of the flag shall be in accordance with drawing No. 5-1-17. The finished flag shall be 7 inches, plus 1/2 inch minus 0 inch, in the hoist dimensions and 11 inches, plus 1/2 inch, minus 0 inch, in the fly direction. All measurements are to be made on the face side of the flag, which is the side nearest the observer when the flag is held with the canton or union in the upper left hand corner. The interior dimensions of the flag shall be as shown on drawing No. 5-1-17. Tolerance for dimensions exceeding 1 inch shall be plus or minus 1/8 inch and those less than 1 inch shall be plus or minus 1/16 inch for the interior dimensions.

3.5 Construction:

3.5.1 Hems. Hemming shall be accomplished using thread specified in 3.3.2, and stitch type301, seam type EFb-1 of ASTM-D6193, with not less than 8 stitches per inch or more than 10 stitches per inch. Flag hems shall be not less than 1/8 inch and may be up 3/8 inch wide. Selvage edges need not be hemmed provided the stripe meets the dimensional requirements. All sides of the flag shall be perpendicular or parallel to each other.

3.5.2 Spearheads. Spearheads shall be fabricated from wood specified in 3.3.3 The spearheads shall be tapered, turned or sanded smooth and gilded with a hole drilled in the base to a minimum depth of 1/2 inch to accept the staff. The finished spearheads shall be 2-1/4 inches, plus 1/4 inch, minus 0 inch, in length.

3.5.3. Staff. The staff for the flag shall be fabricated from wood specified in 3.3.3., Dowels not less than 3/8 inch in diameter shall be turned or sanded smooth. One end of the staff shall be tapered to a diameter of 1/8 inch plus or minus 1/32 inch. The length of the taper shall be 1-1/2 inches, plus or minus 1/4 inch. The staffs shall be natural color of the wood without a protective coating.

3.5.4 Assembly. The spearhead shall be securely attached to the blunt or top end of the staff with a casein type (water resistance) adhesive conforming to type I of ASTM-D4689. The assembled length of the spearhead and staff shall measure 24-3/4 inches, plus 1/2 inch, minus 0 inch, in length. The flag shall be attached to the top of the staff by three staples specified in 3.3.4. The Staples shall pierce the heading hem at the top, center and bottom. Staples through one thickness of material shall not be acceptable.

3.6 Workmanship. The finished assembled flags shall be clean well-made and shall meet the acceptable quality levels established by this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article Inspection (see 4.2)

b. Quality Conformance inspection (see 4.3)

4.2 First Article inspection. Inspection and testing of the first article shall be made on completely finished panel marker for all provision of this specification applicable to the end item examination and tests.

4.3 Quality conformance inspection. Inspection shall be in accordance with the provision set forth in MIL-STD-1916, except otherwise indicated.

4.3.1 Inspection of components.

4.3.1.1 Testing of components. In addition to Verification of the subsidiary specifications and standards, inspection shall be performed on samples of identification marking for the characteristic indicated in table I. The inspection level shall be S-I and requirements shall be applicable to the individual unit and the results shall be reported as pass or fail.

TABLE I Testing of Components

| Component and lot Size expressed in term of | Characteristic | Rqm't para | Test method | #determ Per s/u | Sample Unit |
|---|---|---|---|---|---|
| Print cloth | Colorfastness | 3.3.1.3 | No. 5671 2/ | 1 | 12 inch square |
| (1 yd) Wood (Staff Spearheads) | Species and Seasoning | 3.3.3 | Std comm'1 | 1<br>1 | 6 inch piece of dowel |
| 1/ Staples 1/ | Finish | 3.3.4 | Std comm'1 | | 1 Staples |

1/ Components and materials may be accepted on basis of a contractor's certification of compliance for requirements specified herein.
2/This test is from FED-STD-191.

4.3.2 Examination of the end item:

4.3.2.1 Visual examination of the end item. Defect found during the examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. Lots shall be in accordance with 4.3.2.1.3. The sample unit for these examination shall be one completely finish flag.

4.3.2.1.1 Examination for defects in material, design, construction, and workmanship.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

| Examine | CLASSIFICATION Defect | Major (* ) | Minor | |
|---|---|---|---|---|
| Flag Material | Not type specified …… | X | - | - |
| | Hole or weakening defect such as slab, float, or smash which may be expected to develop into a hole…… | X | - | - |
| | Cut, mend, or tear affecting appearance …… | X | - | - |
| | Soiled or stained …….. | - | * | - |
| Design | Any characteristic of design obscured, irregular, not In register or overlapping…….. | X | - | - |
| | Incorrect or altered arrangement or detail …….. | X | - | - |
| Seams and | Stitch margin not as specified…… | - | * | - |
| Stitch type | Stitch type or seam type not as specified…….. | X | - | - |
| | Less than 8 stitches per inch …… | X | - | Hemming |
| (whe n applicable) | Hems less than 1/8 inch wide…… | X | - | - |
| | Hems more than 3/8 inch wide…… | X | - | - |
| | Hems badly twisted affecting appearance…… | - | * | - |
| | Thread ends not trimmed…….. | - | - | X |
| | Open seam 1/4 inch or more……. | X | - | - |
| | Open seam less than 1/4 inch…….. | - | - | X |
| | Broken stitches causing an unstitched length of less than 1/2 inch…… | - | - | X |
| | Broken stitches causing an unstitched length of more than 1/2 inch…… | X | - | - |
| | Raw edge more than 1/2 inch……. | X | - | - |
| | Color of thread not white…… | - | - | X |
| Construction | Warp threads not in the fly or longitudinal direction of the flag…….. | X | - | - |
| | All sides of the flag canton or union not parallel or perpendicular to each other (out of square) affecting appearance…….. | - | * | - |
| | Star group not centered in canton…… | X | - | - |
| Spearheads | Spearhead missing…….. | X | - | - |
| and staff | Wood of staff not straight grained…….. | - | * | - |
| | Wood of staff not natural color…….. | - | - | X |
| | Staff of spearhead not smoothly finished…… | - | * | - |
| | Staff bowed more than 1/2 inch…… | X | - | - |
| | Staff more than 1/4 inch, but less than 1/2 inch…….. | - | - | X |
| | Spearhead not gilded…….. | X | - | - |
| | Spearhead has been gilded in spots affecting appearance... | - | * | - |
| | Taper of staff not as specified…… | - | * | - |
| Assembly | Spearhead not securely glued to staff…….. | X | - | - |
| | Staples improperly placed or improperly applied…… | - | * | - |
| | Not stapled trough heading or stapled through only one thickness of print cloth…….. | X | - | - |

4.3.2.1.2 Examination of the flag for defects in dimensions. Any dimension not within the specified tolerance shall be classified a defect.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

4.3.2.1.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and the AQL's expressed in defects per hundred units shall be as follows:

| | Inspection Level | AQL major | total |
|---|---|---|---|
| For defects applicable to 4.3.2.1.1 | II | 2.5 | 6.5 |
| For defects applicable to 4.3.2.1.2 | S-2 | (one class) | 10.0 |

4.3.3. Examination of preparation for delivery requirement. An examination shall be made to determine that packaging, packing and marking comply with the requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to the closing operation. Shipping containers fully prepared for delivery shall be examined for the defects of closure listed below. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

| Examine | Defect |
|---|---|
| Marking (exterior and interior) | Omitted, incorrect, illegible, of improper size, location Sequence or method of application. |
| Materials | Any component missing, any component damage, affecting Serviceability. |
| Workmanship | Inadequate application of components such as incomplete Closure of case liner, container flaps, loose strapping Inadequate stapling. |
| Weight | Net weight exceeds requirements. |

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The flag is intended for use in decorating the graves of deceased Military personnel in National Cemeteries.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Procurement documents should specify the following:

(a) Title, date and number of this specification.
(b) When a standard sample will not be furnished (see 3.1).
(c) When first article is not required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1)

6.3 Subject term (key word) listing.

Assembly
Cloth cotton
Color
Colorfastness
Construction
Design
Hem
Materials
Printing
Spearhead
Staff
Staples
Thread
Wood

6.4 Changes from previous issue. Asterisks or vertical lines are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

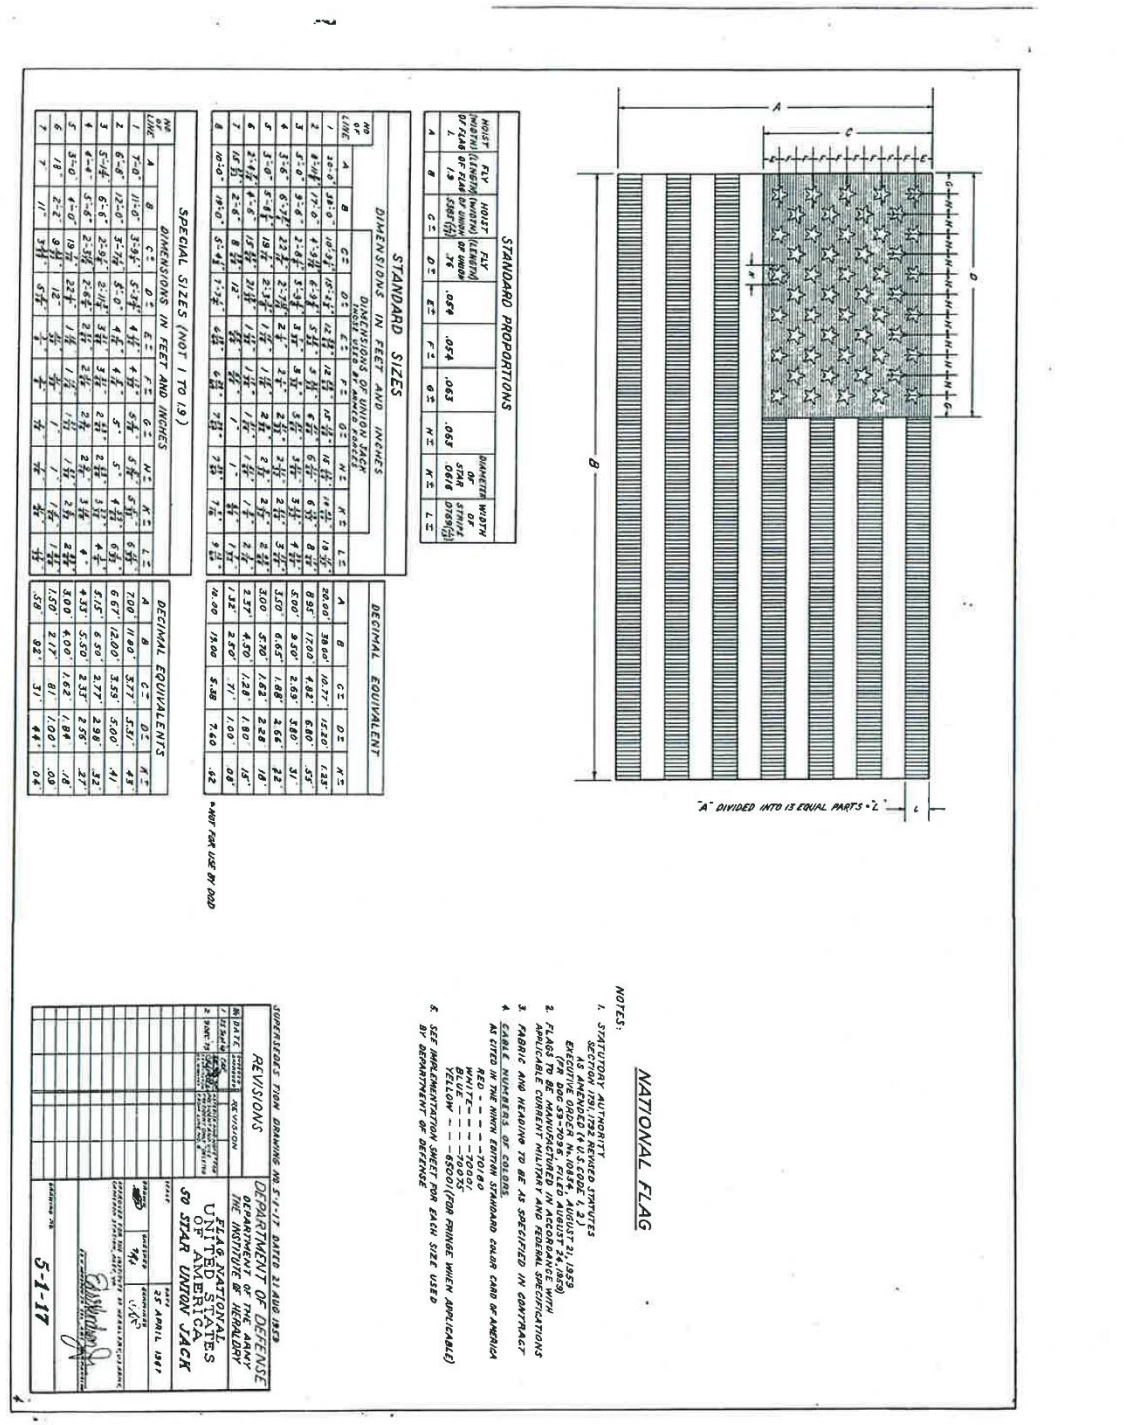



Figure1: TIOH 5-1-17 Flag, National, United State of America, Grave Decorating, Print Cloth



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8345-2024-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:18Z
Check the source to verify that this is the current version before use.