MIL-L-2034C(SHIPS)
23 January 1975
SUPERSEDING
MIL-L-2034B(SHIPS)
12 August 1963
(See 6.8)

MILITARY SPECIFICATION

LIGHT SET, SURGICAL, 100 WATT, 120 VOLT,

SYMBOL NO. 107.1 (NAVAL SHIPBOARD USE)

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an electric, shadow-reducing, demountable, surgical overhead light set, symbol number 107.1 (including stowage box and essential repair parts) of a shockproof type for surgical space applications onboard ship.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL
PPP-B-636 - Box, Shipping, Fiberboard.

MILITARY
MIL-P-116 - Preservation-Packaging, Methods of.
MIL-S-901 - Shock Tests, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems, Requirements for.
MIL-R-2726/50 - Receptacle, Plug, Electrical, 15 Ampere, 125/250 Volts, 2 Pole Grounded (Symbol No. 720.3).
MIL-F-16377 - Fixtures, Lighting; and Associated Parts, Shipboard Use, General Specification for.

STANDARDS

MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-167-1 - Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited).
MS15600 - Lamp, Indandescent, A-21, Medium Screw, Clear Finish.
MS17153 - Window, Lighting Fixture, Incandescent, Plastic, Disc Shaped.

DRAWINGS

NAVSHIPS
803-1197105 - Light Set, Surgical, 100 Watt, 120 Volt, SYM. No. 107.1.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

AMERICAN NATIONAL STANDARD INSTITUTE, INC. (ANSI)
B46.1-1962 - Surface Texture.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, New York 10018.)

ILLUMINATION ENGINEERING SOCIETY (IES)
General Guide to Photometry.

(Application for copies should be addressed to the Illuminating Engineering Society, 345 East 47th Street, New York, N.Y. 10017.)

NATIONAL BUREAU OF STANDARDS
Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Officer, Washington, D.C. 20402.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article inspection. Prior to beginning production, a sample light manufactured by production tools and processes shall be inspected as specified in 4.3 (see 6.3). Prior to submission of the sample for first article inspection, the Defense Contract Administration Service (DCAS) shall verify that the sample was manufactured with production tools and processes (see 3.1.1).

3.1.1 Commencement of production. Ordering of material and production shall not be started until a satisfactory first article inspection report (see 6.2.2) has been accepted in writing by the procuring activity (see 6.5). Ordering of material or commencement of production prior to the acceptance of the first article inspection report shall be at supplier's own risk. Acceptance of the sample tested on first article inspection authorizes the commencement of production, but does not relieve the supplier of the responsibility for compliance with this specification. Production items shall be manufactured in the same facilities used for manufacturing the first article.

3.2 Surgical light.

3.2.1 Design. The light shall be a dome shaped, overhead mounted demountable type as shown on Drawing 803-1197105. The light shall be capable of remaining at rest in any position to which the beam is directed without resort to the use of locking devices. Directional changes of the beam shall be accomplished with minimum effort, by means of handgrips. The handgrips shall be securely attached to the light housing. If screws are used, the nuts or tapped pads shall be permanently attached to the inner surface of the housing. This will permit tightening of the screws without complete disassembly of the light. Construction of the light shall permit easy and rapid lamp replacement. The lamp and reflector shall be enclosed in the dome shaped housing as tightly as practicable with due regard for necessary provision for heat dissipation. Except for the reflector, brass, bronze or corrosion-resisting steel shall constitute the major materials of the light.

3.2.2 Lamp. Lamp shall be furnished and shall be 100 watt, 115 volt, industry number 100A21/5P(115) as shown on MS15600.

3.2.3 Lampholder. Lampholder shall be a commercial type such as Arrow-Hart Inc. catalogue number 8858 or equivalent.

3.2.4 Window. Window shall be in accordance with piece number 21 of MS17153.

3.2.5 Globe (heat control cylinder). The globe (heat control cylinder) shall be Corning Glass number 5963 4 inches + 1/32, - 1/16 inch diameter by 4 inches ± 1/16 inch high by 5/32 inch nominal wall thickness or equivalent. The globe shall have color correcting qualities, such that when the lamp is energized at 115 volts, the light emitted shall be corrected to a color temperature of 3500 ± 500 K (kelvin) when tested as specified in 4.6.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

3.2.6 Cable and plug connector. Light shall be provided with a 4-1/2 foot length of an Under Writers Laboratory (UL) approved type SJO or SJT-18/3 cable. A plug connector symbol number 720.3 specified in MIL-R-2726/50 shall be attached to the cable. Where the cable enters the light, it shall be protected against sharp bends. A strain relief shall be provided to prevent breakage of wire leads at terminals on lampholder and ground connection.

3.2.7 Ground connection. The free end of the ground (green) conductor of the cable assembly shall be securely attached and electrically connected within the light to the metallic or conducting structure (noncurrent-carrying metal parts) in such a manner that all exposed metallic or conducting portions shall make adequate electrical contact with the grounding conductor. Manipulation of the focusing knob shall in no way, affect the continuity when tested in accordance with 4.6.6.

3.2.8 Insulation resistance. Insulation resistance between current-carrying and non-current-carrying parts shall be at least 100 megohms when tested in accordance with 4.6.2.

3.2.9 Dielectric strength. There shall be no evidence of breakdown when the interior of the light is subjected to the test specified in 4.6.1.

3.2.10 Shock. The light shall withstand without damage or loosening of parts, the class HI shock tests specified in 4.6.4.

3.2.11 Vibration. The light shall withstand without damage or loosening of parts, the vibration test specified in 4.6.5.

3.2.12 Light distribution. Light distribution shall be symmetrical and the light intensity in foot-candles shall be at least the values shown on figure 1 when tested as specified in 4.6.3.

3.2.13 Finishes.

3.2.13.1 Surface. Surface roughness finishes specified herein shall be in accordance with ANSI B46.1-1962.

3.2.13.2 Light exterior surfaces. Exterior surfaces (excluding handgrips but including mounting flange) shall be given a baked-on gray enamel "Hammertone" finish commercially known as "Stiptone finish X-344" or equivalent. The heat cap (piece 5 of Drawing 803-1195105) shall be painted on the outside only. There shall be a positive contact between the bridge bar and the heat cap and housing to insure electrical conductivity.

3.2.13.3 Handgrips. Final finish of the handgrips shall be chrome plate, applied over a copper-nickel undercoat.

3.3 Stowage box.

3.3.1 Design, construction and dimensions. The stowage box shall be of either drawn or fabricated construction, and shall be in accordance with the applicable portions of Drawing 803-1197105. The stowage box shall provide for the retention of repair parts and for the stowage of the light when not being used. The light as stowed in the box shall be sufficiently cushioned to prevent movement and marring of any surface. A cushioned quick acting latching device shall hold the yoke in a rigid position. When necessary to prevent loss, cushions shall be firmly cemented in place. Spot welding or riveting may be used in the assembly of the box. Overall stowage box dimensions and arrangements are also shown on figure 2 for information purposes.

3.3.2 Finish. Both inner and outer surfaces shall receive a final finish of a high temperature baked-on gray enamel, applied over a primer. The enamel shall be of a good commercial grade which will not chip, scratch, or mar.

3.4 Cleaning and priming. Metal parts shall be cleaned and primed in accordance with commercial practice.

3.5 Bolts, nuts, screws, washers and similar hardware. Unless otherwise specified in the contract or order, the hardware shall be of a good commercial grade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

3.6 Castings and molded parts. Castings shall be free from cold shuts, blow holes, or any imperfections that may affect the strength. Surfaces of castings shall have burrs and fins removed. Flash shall be removed from molded parts.

3.7 Drilling, countersinking and tapping. Holes shall have burrs removed. Drilling, countersinking and tapping shall be done before plating or finish is applied.

3.8 Fabrication. Rivets, pads, stools, brackets, assemblies, subassemblies and similar items shall be securely attached to prevent rotation, rattling, turning, bending and similar conditions.

3.9 Threads. Threads shall conform to Handbook H28.

3.10 Corners. Sharp corners shall be broken.

3.11 Unpainted parts. In general shockmounts, glassware and plasticware shall not be painted.

3.12 Plating. Cadmium, zinc, nickel or chrome plating shall be used on unpainted steel (except corrosion-resisting steel) parts such as fastening hardware, to prevent corrosion.

3.13 Identification and information plates. Identification and information plates shall be attached to the light and stowage box in accordance with Drawing 803-1197105.

3.14 Repair parts and repair parts list. Each light set shall include one each of the following repair parts:

(a) Lamp (see 3.2.2).
(b) Lampholder (see 3.2.3).
(c) Window (see 3.2.4).
(d) Globe (heat control cylinder) (see 3.2.5).

One copy of a repair parts list (piece 110 at Drawing 803-1197105), identifying each item by its National Stock Number, shall be furnished with each light. This list shall be printed or otherwise reproduced on white card stock.

3.15 Technical data. The supplier shall prepare the following technical data in accordance with the data ordering documents included in the contract or order (see 6.2.2):

(a) Drawings (see 3.15.1 and 4.3).
(b) Technical manuals (see 3.15.2).
(c) Inspection system plan (see 4.1.1).
(d) First article test report (see 4.3.1).

3.15.1 Drawings. In addition to the engineering drawing content required by the data ordering documents (see 6.2.2), the following unique technical feature shall be included:

(a) After acceptance of the first article sample, the supplier shall furnish 2 sets of detail manufacturing drawings. Drawings shall be distributed as follows:
(1) One set to Naval Ship Engineering Center (NAVSEC).
(2) One set to Defense Personnel Support Center.

3.15.2 Technical manuals. In addition to the technical manuals content required by the data ordering documents (see 6.2.2), the following unique technical features shall be included:

(a) One copy of the manual shall be furnished and packaged with each light. In general, the manual shall contain the following:
(1) General information.
(2) Operating instructions.
(3) Maintenance.
(4) Parts list.
(5) Pertinent drawings.
(b) As soon as practicable after award of the contract, the supplier shall furnish to the procuring activity via the cognizant DCAS, two preliminary copies of his proposed manual, for review and comment by NAVSEC. The preliminary manuals shall be submitted

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

sufficiently early to permit adequate review (based on a maximum period of 30 calendar days for such review) and to allow incorporation by the supplier of required revisions and corrections in the final manual without delaying delivery under the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection system. The supplier shall provide and maintain an inspection system in accordance with the data ordering documents included in the contract or order (see 6.2.2).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. The sample for first article inspection shall be subjected to the examination specified in 4.5 and the tests specified in 4.6.1 through 4.6.7 (see 6.3). No design changes may be made to the light set without prior acceptance by NAVSEC. When design changes are proposed, NAVSEC may require that a first article model of the new design be submitted for examination and tests prior to acceptance. When design changes are accepted, drawings furnished as specified in 3.15.1 shall be amended before the next production run.

4.3.1 First article test report. The supplier shall prepare a first article test report in accordance with the data ordering document included in the contract or order (see 6.2.2).

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the following:

(a) Examination of 4.5.
(b) Quality conformance tests of 4.6.1, 4.6.2 and 4.6.6.
(c) Examination for preparation of delivery of 4.7.

4.4.1 Sampling for quality conformance inspection.

4.4.1.1 Lot. For the purpose of sampling, a lot shall be the identical number of items on the contract or order.

4.4.1.2 Sampling for examination. Sample lights shall be selected at random from each lot in accordance with level S-1 of MIL-STD-105 for the examination specified in 4.5. The acceptable quality level (AQL) shall be 2.5 percent defective. Samples containing one or more defects shall not be offered for delivery, and if the number of nonconforming items exceeds the acceptance number for that sample, the lot represented by the sample shall not be offered for delivery.

4.4.1.3 Sampling for quality conformance tests. Samples shall be selected at random from each lot in accordance with level S-2 of MIL-STD-105 for the tests specified in 4.6. If any sample fails to conform to these tests, the sample and the lot represented shall not be offered for delivery.

4.4.1.4 Sampling for examination for preparation of delivery. Samples shall be selected at random from each lot in accordance with level S-2 of MIL-STD-105. The AQL shall be 4.0 expressed as defects per hundred units. Any deviation from the requirements specified shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:01Z
Check the source to verify that this is the current version before use.

4.5 Examination. Light sets selected in accordance with 4.4.1.2 shall be subjected to the examination specified in table I to ascertain that shape, material, dimensions, marking, weight and workmanship are in conformance with the requirements of this specification. The fit of parts shall be observed with reference to the interchangeability of the repair parts specified in 3.14.1. Any light set in the sample containing one or more defects shall be rejected, and if the number of nonconforming light sets in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be subject to rejection.

Table I - Classification of defects.

Categories	Defects
Critical	
1	Ground conductor not securely attached and electrically connected in light; circuit continuity not complete with ground contact in plug connector.
Major	
101	Design not as specified; parts missing.
102	Dimensions and tolerances exceed those specified.
103	Mounting flange not as specified; thread engagement less than required.
104	Materials not as specified.
105	Handgrips not as specified; not securely attached.
106	Lamp not furnished; not as specified; not readily removable.
107	Lampholder not as specified; not for intended purpose.
108	Window not as specified.
109	Globe (heat control cylinder) not as specified.
110	Reflector not as specified; not tightly enclosed in dome as specified.
111	Cable not length and type required; plug connector not attached; strain relief not provided.
112	Stowage box not as specified; cushions missing.
113	Finish (enamel) not-chip, scratch or mar resisting as specified.
114	Manual not as specified; not provided with each light set.
115	Identification and information plate not legible and not as specified; not securely attached.
116	Focal adjustment device not as specified.
117	Any stowage box handle not securely attached to the box.
Minor	
201	Evidence of pockets or crevices in which dust can collect (light only).
202	Repair parts missing, incorrect or not as specified.
203	Repair parts list not as specified; not attached to inside cover of stowage box.
204	Cushions not cemented in stowage box as specified.

4.6 Tests.

4.6.1 Dielectric test. Each light shall be subjected for 1 minute to a dielectric test voltage, the effective potential of which is twice rated voltage plus 1,000 volts, applied between points of polarity and also between live parts and ground. The frequency of the test voltage shall be 60 Hertz (Hz) root means square (rms) alternating current (ac) and shall approximate a true sine wave.

4.6.2 Insulation resistance. After completion of the dielectric test (see 4.6.1), the insulation resistance shall be measured between all current-carrying parts and between current-carrying parts and noncurrent-carrying parts with a megohmeter at a voltage not less than 500 volts direct current (dc) at normal room temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

4.6.3 Light distribution. Test procedure for measuring light output shall conform to the IES General Guide to Photometry. An 8 inch by 8 inch square surface shall be divided into 16 equal areas. The surface shall be placed 4 feet from and parallel to the lens of the light. With the lamp operating at 115 volts, the light intensity of the illuminated surface shall be measured with a foot-candle meter at the center at each square as shown on figure 1. The light shall be focused for maximum intensity on the test surface and balanced as nearly as possible for equal distribution.

4.6.4 Shock tests. The light shall be subjected to the shock tests specified in MIL-S-901 for grade A equipment. Mounting shall simulate normal shipboard installation. A typical mounting is shown on figure 3. The light shall be energized during this test.

4.6.5 Vibration. The light shall be subjected to a vibration test in accordance with type I of MIL-STD-167-1. Mounting shall simulate normal shipboard installation. A typical mounting is shown on figure 3. The light shall be energized during this test. Failure of lamp filament does not constitute failure of test. No loosening of rivets, pads, stools, brackets, assemblies, subassemblies and similar items shall be evident at the conclusion of this test.

4.6.6 Grounding circuit test. A grounding circuit test shall be conducted in accordance with MIL-P-16377, to determine conformance with 3.2.7.

4.6.7 Color temperature. Color temperature as specified in 3.2.5 establishes the isotemperature relationship between the Planckian locus and a point, which is a plot of the x, y, coordinates of color, on the chromaticity diagram. Measurement shall be performed at room temperature by means of a spectrophotometer of standard make and model.

4.7 Inspection of preparation for delivery. Sample packages and packs and the inspection of preservation-packaging, packing and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.6.)

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2.1).

5.1.1 General. One surgical light including repair parts (see 3.14) compressing a set contained in the required stowage box (see 3.3) shall constitute one unit of issue.

5.1.2 Level A.

5.1.2.1 Packaging. The light shall be secured in the stowage box with the quick acting latching device. The light as stowed in the box shall be cushioned sufficiently to prevent movement and marring of any surface. The repair parts and any loose components of the light, such as the mounting flange, shall be sufficiently cushioned and shall be prevented from movement within the stowage box.

5.1.3 Level C. Each unit of issue (see 5.1.1) shall be packaged to provide protection against corrosion and damage during shipment from the supply source to the first receiving activity for immediate use. The suppliers normal preservation-packaging method may be used when such meets the requirements of this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2.1).

5.2.1 Level A. Light sets packaged as specified shall be individually packed for shipment in a fiberboard box conforming to type CF, class weather-resistant, variety DW or SW of PPP-B-636. The grade and box style shall be at the option of the supplier. The box shall be provided with interior packaging forms or a sleeve to protect the stowage box handle, hinges and other protruding parts from damage and damage to the outer fiberboard box. When sleeves are used they shall conform to the requirements of PPP-B-636. Other forms when used such as pads, die-cuts, etc., shall be fabricated of the same type and grade as the box. Box closure, waterproofing and reinforcing shall be in accordance with method V of the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Light sets packaged as specified shall be packed for shipment as specified in 5.2.1 except that the fiberboard box shall conform to type CF, class-domestic, variety DW and meeting the special requirements of PPP-B-636. Box style and grade shall be at the suppliers option.

5.2.3 Level C. Light sets packaged as specified shall be packed in containers acceptable to the common carrier and which will insure safe delivery at destination in an undamaged condition at the lowest applicable rate. Containers, packing and method of shipment shall comply with Uniform Freight or National Motor Freight Classification Rules or Regulations or other carrier rules as applicable to the mode of transportation.

5.3 Marking. In addition to any special markings required by the contract or order (see 6.2.1) or herein, interior packages and exterior shipping containers shall be marked in accordance with the requirements of MIL-STD-129 and MIL-P-116.

5.3.1 Special markings. Each shipping container and interior package as applicable shall be marked with arrows and fragile markings in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Light sets covered by this specification are intended for use in surgical areas onboard ship such as:

(a) Main operating rooms.
(b) Battle dressing stations.
(c) Surgical dressing rooms.

6.2 Ordering data.

6.2.1 Procurement requirements. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Level of preservation-packaging and level of packing required (see 5.1 and 5.2).
(c) Special markings required (see 5.3).

6.2.2 Contract data requirements. When this specification is used in a procurement invoking the data requirement clause of the Armed Services Procurement Regulations (ASPR) paragraph 7-104.9(n) and which incorporates a DD Form 1423 Contract Data Requirements List (CDRL), the data requirements identified below will be developed as specified in the cited Data Item Description (DID) and delivered in accordance with such CDRL. When the ASPR provisions are not invoked, the data specified below shall be delivered in accordance with the contract requirements.

Specification paragraph	Data requirements	Service	Applicable DID	Options
3.15.1	Drawings	SH	UDI-E-23174	Type II, Category F Form 3
3.15.2	Technical manual	SH	DI-M-2050	--
4.1.1	Inspection system plan	SH	UDI-R-23574	--
3.1.1, 4.3.1, and 6.5	First article test report	SH	UDI-T-23450	--

(Copies of DID's required by the supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

6.3 First article inspection. Invitations for bid should provide that the Government reserves the right to waive the requirement for samples for first article inspection, as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.4 Symbol number. Symbol number is a standard equipment designation. Symbol numbers are listed in NAVSHIPS 0960-000-4000.

♦ 6.5 Acceptance of the first article inspection report. The procuring activity (Naval Shipyard, Private Shipyards/Supervisor of Shipbuilding Conversion and Repair, and Defense Supply Agencies) will, by written notice to the supplier, waive, accept, conditionally accept, or reject the first article inspection report. When it is deemed necessary, the procuring activity will forward the first article inspection report to NAVSEC for resolution on acceptance or nonacceptance of marginal or nonconforming supplies.

♦ 6.6 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.


♦ 6.7 Weight. The total weight of the stowage box and the light is estimated to be 52 pounds.

♦ 6.8 THE MARGINS OF THIS SPECIFICATION ARE MARKED "♦" TO INDICATE WHERE CHANGES (ADDITIONS, MODIFICATIONS, CORRECTIONS, DELETIONS) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS WAS DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

Preparing activity:
Navy - SH
(Project 6530-N139)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

#

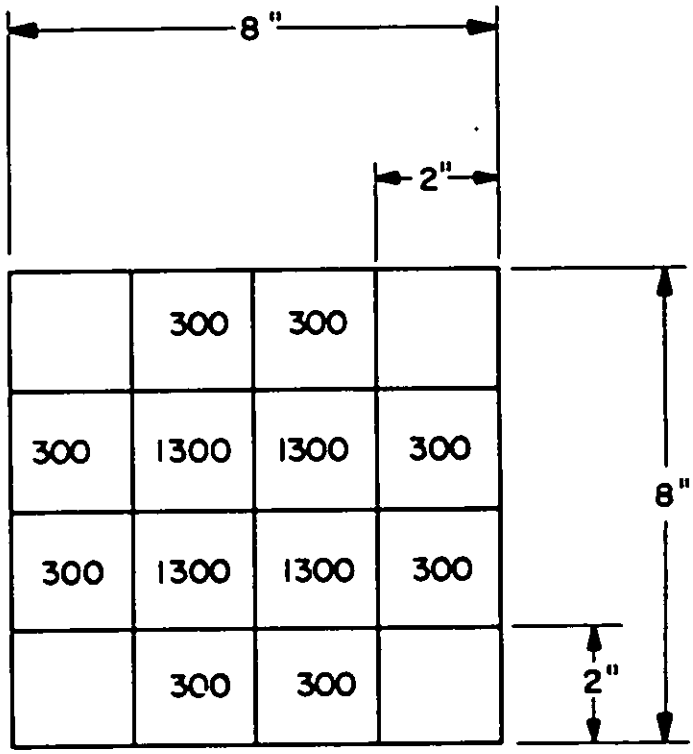

SH 10798

Figure 1 - Foot-candle distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

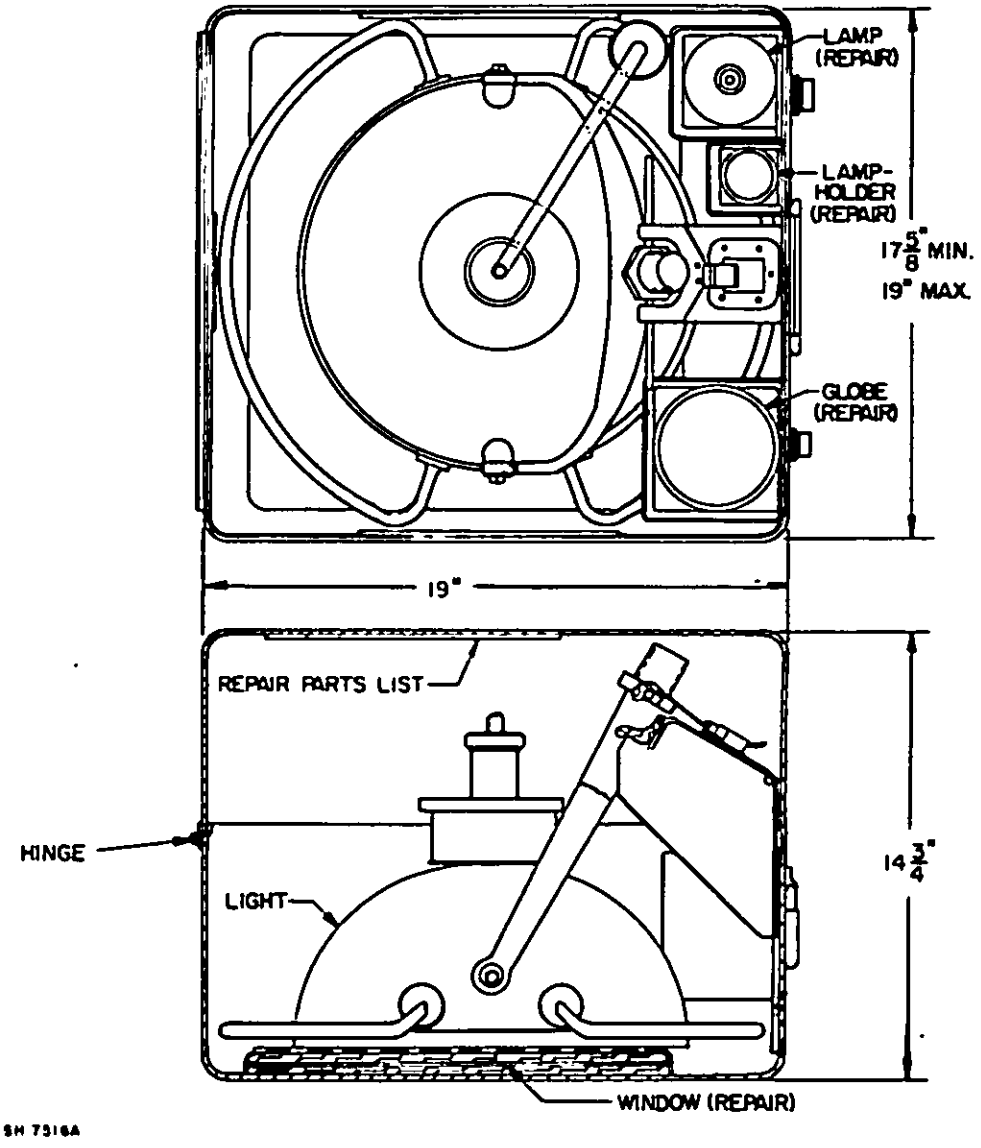


Figure 2 - Overall stowage box dimensions and arrangement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:01Z
Check the source to verify that this is the current version before use.

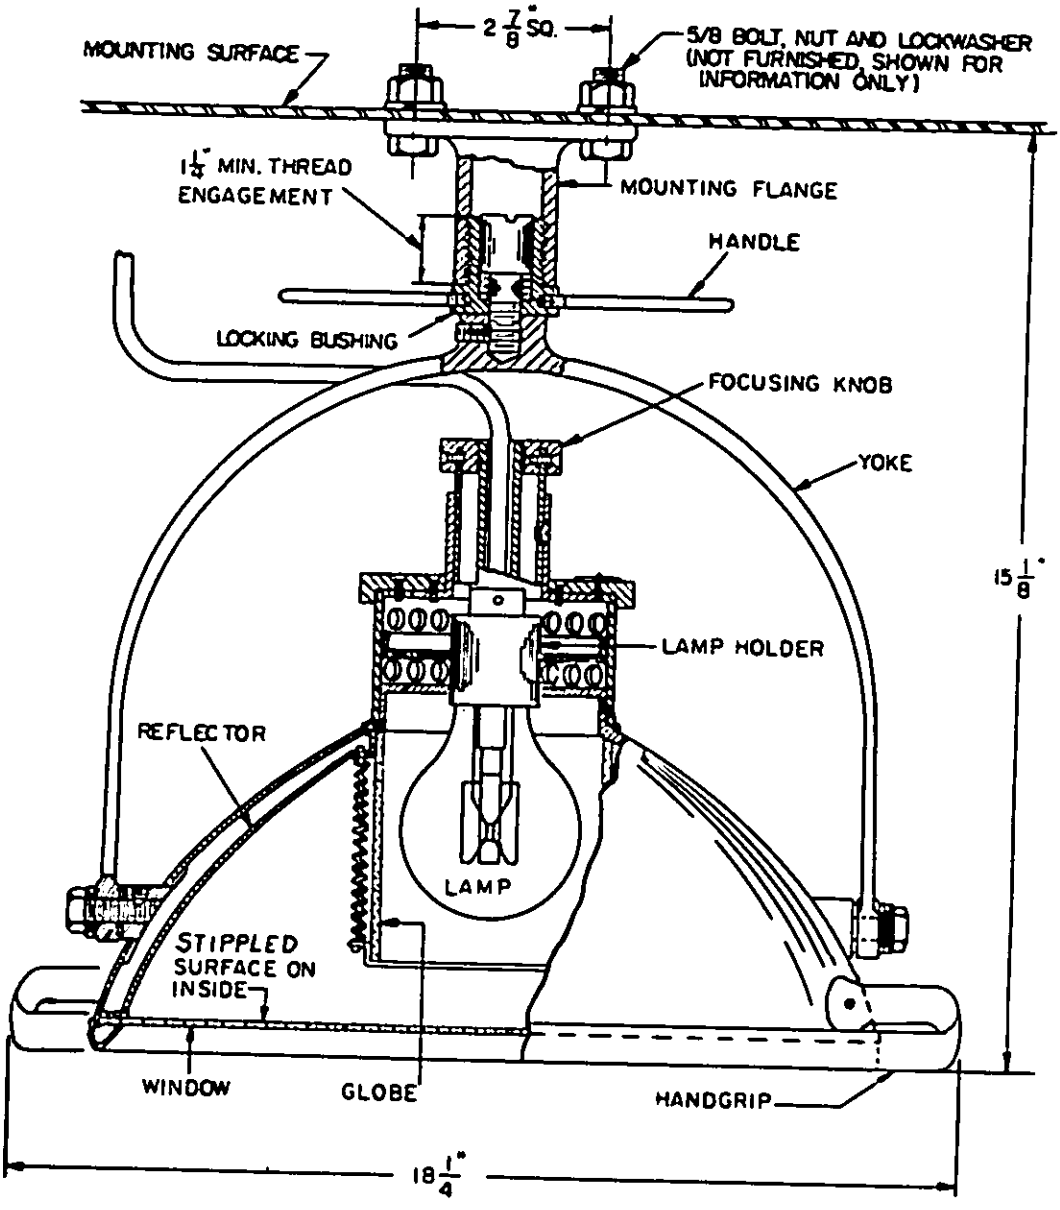


Figure 3 - Surgical light arrangement and typical mounting for shock and vibration tests.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1975-603-115/4245

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:01Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2024-11-16T14:01Z
Check the source to verify that this is the current version before use.