MIL-R-2023C
31 October 1988
SUPERSEDING
MIL-R-2023B
30 March 1967
MIL-B-2023A
25 September 1952

MILITARY SPECIFICATION

ROBE, DRESSING

(Striped Seersucker)

This specification is approved for use
by all Departments and Agencies
of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and two sizes of a durable press, cotton-polyester, striped seersucker, dressing robe.

1.2 Classification. The striped seersucker robe shall be furnished in medium or large size as follows (see 6.2):

Size 1 - Medium
Size 2 - Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center ATTN: Directorate of Medical Materiel DPSC-RST, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 6532

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, and standards. The following specifications, and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

Federal

UU-P-268 - Paper, Kraft, Wrapping
DDD-L-20 - Labels, for Clothing, Equipage and Tentage, (General use)
PPP-B-636 - Boxes, Shipping, Fiberboard

Military

MIL-T-43548 - Thread, Polyester, Cotton-covered
MIL-T-43624 - Thread, Polyester, Spun

STANDARDS

Federal

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-129 - Marking for Shipment and Storage

MIL-STD-147 - Palletized Unit Loads

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the documents cited in the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

COLOR ASSOCIATION OF THE UNITED STATES, INCORPORATED

TCA Cable Numbers and Colors

(Application for copies should be addressed to the Color Association of the United States, Incorporated, 200 Madison Avenue, New York, NY 10016.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)
Technical Manual

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709.)

(Nongovernment standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.4). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

3.3 Materials.

3.3.1 Basic cloth. The robes shall be fabricated from the untreated cloth, (3.3.1.1), treated with a durable press finish, see 3.3.1.4).

3.3.1.1 Untreated. The untreated cloth shall be fabricated from warp and filling yarns containing a blend of polyester (polyethylene glycol terephthalate) and cotton. When inspected as specified in table VI, the cloth shall conform to the requirements of table 1.

TABLE I. Untreated basic cloth properties.

Characteristics	Requirements
Fiber content:	
cotton, percent	22 minimum
polyester	Remainder
Ply warp and filling	Singles
Nonfibrous material, percent maximum 1/	3.0
Slack beam take up, percent minimum	30

1/ Includes chloroform and water soluble materials and starch and protein content.

3.3.1.2 Weave. The weave shall be a modified plain weave with the slack warp weaving two ends as one. The stripe effect shall be produced by using two warp beams, one tight and one slack. The color of the tight warp beam yarn shall approximate Blue, Shade Number 17 when the cloth is cured. The slack beam warp yarn shall be greige (natural) or bleached white. The two warps shall alternate in sections of tight and slack ends and each color pattern repeat shall be 10 tight 10 slack. The use of dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited in the untreated or treated cloth.

3.3.1.3 Color matching. The color of the blue stripes of the cured cloth shall be compared to the approved standard shade under natural (north sky), artificial daylight having a color temperature of 7500 degrees Kelvin or under incandescent lamplight of 2800 degrees Kelvin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

3.3.1.4 Treated. The untreated cloth, (see 3.3.1.1) shall be treated with a suitable catalyzed resin system and hand modifiers resulting in a pre-cured or post-cured type durable press finish. A wetting agent may be used to facilitate the processing. The treated and cured cloth, laundered fifteen times, shall conform to the requirements of table II when tested as specified in table VI.

TABLE II. Treated and cured basic cloth properties.

Characteristics	Requirements
Ounces per square yard, minimum	3.5
Yarns per inch, minimum:	
Warp	92
Filling	58
Breaking strength, pounds minimum:	
Warp	55
Filling	65
pH	5.0 to 8.5
Dimensional stability, percent maximum:	
Warp	2.0
Filling	2.0
Labile Sulfur	Trace
Colorfastness of blue stripe to:	
Laundering	Fair
Light	Fair

3.3.2 Thread. All the sewing operations shall be performed with the cotton-covered, polyester thread conforming to MIL-T-43548, Ticket Number 70 and Ticket Number 50, 2 ply or the spun polyester thread conforming to MIL-T-43624, Class 1 or 2, Ticket Number 70, 2 or 3 ply or Ticket Number 40, 3 ply and Ticket Number 50, 3 ply (see table IV). When spun polyester thread is used, the Ticket Number 40, 3 ply and Ticket Number 50, 3 ply may be substituted for the Ticket Number 50, 2 ply; and the Ticket Number 70, 2 or 3 ply may be substituted for the Ticket Number 70, 2 ply (see table IV). Ticket Number 50, 2 ply, may be substituted for Ticket Number 70, 2 ply. The color of the thread shall be white.

3.3.3 Hanger loop. The hanger loop shall be cotton or polyester tape, 1/4 to 3/8 inch wide, having a breaking strength of not less than 50 pounds in the warp direction. The braid for the class 1 robe shall show good fastness to laundering. Braid shall meet these requirements when tested as specified in 4.3 (see hanger loop option in operations 1b, 1c and 4.) As an alternate, the loop may be constructed of the basic fabric.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the currentversion before use.

3.3.4 Label. The combination identification and washing information label for each robe shall conform to DDD-L-20, Type I, Class 1 and 3, Launderable Label, except that the color of the label shall be one of the following colors for the appropriate robe size:

COLOR	TCA CABLE NUMBER	SMOCK SIZE
Lemon Yellow	70205	Medium
Indian Orange	70072	Large

When inspected as specified in 4.4.2.1, the color of the label shall approximately match the crepe side of the applicable TCA Cable Number. The color of the label shall be obtained with vat or naphthol dyes. The printing and color of the label shall show at least "good" colorfastness to laundering transference and at least "fair" colorfastness to accelerated laundering. The color of the printing medium shall be black. The size of the label shall be adequate to contain the following information:

ROBE, DRESSING, STRIPED SEERSUCKER, COTTON-POLYESTER, DURABLE PRESS
MIL-R-2023
SIZE
CONTRACT OR ORDER NUMBER
NAME OF MANUFACTURER
NSN
WOOL OR FIBER PRODUCTS ACT INFORMATION

The above information shall be on the left side of the label (right side of the robe when worn) adjacent and separated from the washing information by a black vertical line approximately 1/16 inch wide. The washing information shall be as follows:

WASHING INFORMATION

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at hot setting. Remove immediately at end of drying. Shape and hang.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touching up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.4 Design. The robe shall be a wrap around type with two lower side patch pockets and one left breast patch pocket. Closure of the robe shall be accomplished by two half belts. The robe shall conform in appearance to figure 1.

3.5 Patterns. Standard patterns, which provide an allowance of 3/8 inch for all seams except double-lapped, double-stitched seams where 1/2 inch is provided, may be obtained from the procuring activity or as directed by the contracting officer. These patterns are to be used only as a guide for cutting the supplier's working patterns and shall not be altered in any way. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The robes shall be cut from materials as specified in accordance with the pattern parts indicated.

TABLE III. List of pattern parts

Material	Nomenclature of parts	Cut parts
Cloth, cotton-polyester seersucker	Back	1
	Front	2
	Top sleeve	2
	Under sleeve	2
	Side patch pocket	2
	Breast patch pocket	1
	Undercollar	2
	Front facing	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

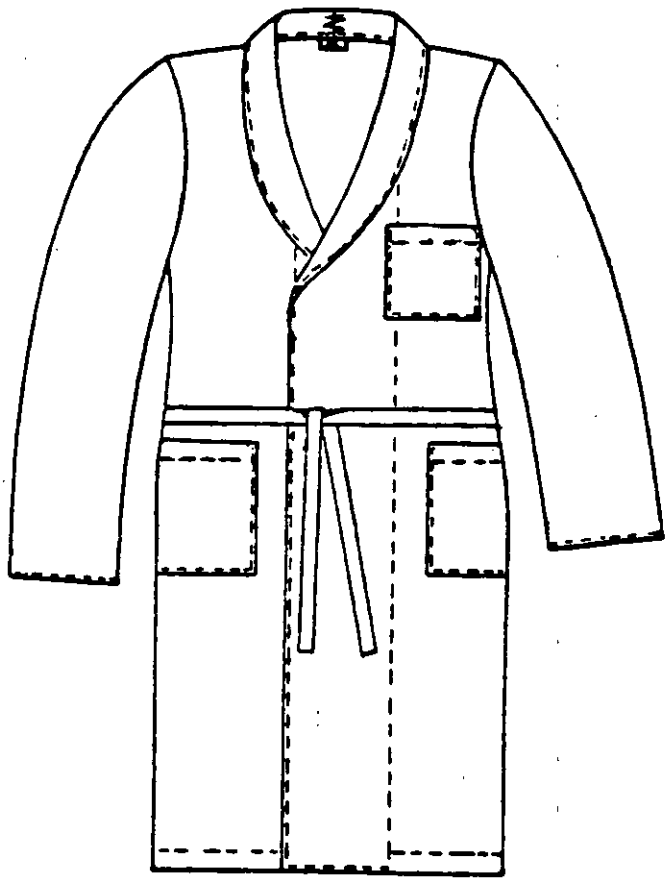


FIGURE 1. Robe, dressing, striped, durable press, seersucker.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seams, and stitching types specified in table IV shall conform to Federal Standard No. 751. Whenever two or more methods for seams or stitching types are given for the same part of the operation, any one of them may be used. Where stitch type 401 is used, the looper, that is the under thread, shall be on the inside of the robe. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams shall result. The stitching gage for double-lapped double-stitched seams shall be 3/16 to 5/16 inch, with the outer row of stitching 1/16 inch from turned edge on outside of robe.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table IV.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less that 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired using 301 stitch type.

3.7 Manufacturing operations requirements. The robes shall be made in accordance with operation requirements specified in table IV. The supplier is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished robe.

3.7.1 Marking. The components of the robes shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(1) Corrosive metal fastening devices.

(2) Sew-on type tickets.

(3) Adhesive type tickets which discolor, or the adhesive adheres to the material upon removal of the tickets.

As an alternate, only the top and bottom ply of each lay may be marked, providing dye lot segregation is maintained and shading of component parts is not evident in end items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturing operations.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting					
	a) Cut robe in accordance with patterns furnished, which show directional lines (placed in warp direction), size placement of parts, and notches, for proper assembly.					
	b) All component parts shall be cut of the same material except the stripping for hanger loop (see 4-a)					
2.	Replacement of damaged parts					
	a) Replace (at time of cutting, any part containing hole, smash, multiple float or large unsightly slub.					
	b) Replace any part damaged during the manufacturing process, such as needle chew, cut, tear, hole, burn or large exposed drill hole. (Unit containing one or more visable mends will not be acceptable)					

Source: https://assist.dla.mil -- Downloaded: 202640-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturing operations - Continued.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
3.	Marking					
	a) Mark, bundle, and ticket all component parts of the robe to insure a correct size, a uniform grade, and proper assembly of all parts. As an alternate the manufacturer may mark the top and bottom ply of each lay providing dye lot segration is maintained and shading of parts is not evident in end item. (see 3.7.1)					
4.	Hanger Loop					
	a) Shall measure 1/4" wide and be cut from #3 white cotton tape, using 28 ends of 30/1 combed yarn and 28 ends of 40/2 combed yarn.			48 picks per inch		
	b) As an alternate, the hanger may be constructed of basic material. Fold stripping in half lengthwise and with the edges turned in, stitch 1/16 inch from edge. The stitched stripping shall measure 1/4 to 3/8 inches wide.	301 or 406	EFp-1 or EFH-1	10-14	50-3	50-3
	c) Insert during operation 7-c.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturing operations - Continued.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
5.	Make belt					
	a) All belts shall be cut from a continous strip in the warp direction.					
	b) Fold belting in half and having edges turned in, stitch 1/16 inch from edges. The belt shall measure 1-3/16 inch wide.	101	BSb-1	6-8	50-3	50-3
	c) Belts shall be cut to lengths 33" each.					
	d) Tack the belt end, turn and tack forming a triangle shaped finished end.	Bartack		28	50-2	50-3
	e) As an alternate, the belt may be made as follows:					
	The belt shall be cut 3-3/4" ± 1/4" wide in the warp direction. Stitching shall be 1/16" to 1/8" from folded edge. One end of each belt shall be turned under a minimum of 3/8".	301 or 401	EFj-1	10-14	50-3 or 70-2	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturing operations - Continued.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
	Finished width of the belt shall be 1-1/2" ± 1/4". Finished width of the belt shall be 1-1/2" ± 1/4". The length of each half belt shall be 30" ± 1 inch.					
	The turned end of each belt shall contain a bartack 1/2" ± 1/8" long centered across the belt seam 1/16" to 1/8" from belt end.					
6.	Pockets					
	Hem 2 side and 1 breast pocket					
	Turn in 3/4" of pocket end and stitch through 1/16 to 1/8 inch from edge. Finished hem of pocket shall be 3/4 inches (± 1/8).	101 or 301	EFb-1	6-8 9-10	50-3	50-3
7.	Collar					
	a) Make collar. Stitch the collar and under-collar pieces together face-to-face around curve and across top, finishing at end of opposite curve with a seam 3/8 inch from raw edge, (center back seam in collar- optional)	512	SSa-2	9-10	50-3	50-3
	b) Turn, roll out edge and raise stitch 1/4 inch from edge.	301	EFb-1	9-10	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturing operations - Continued.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
	c) Set collar. Join collar to robe, (after joining shoulders) right side of collar to wrong side of robe with collar extending 1/4 inch beyond end of robe and join with 1/4 inch seam. Fullness of collar shall be distributed evenly. Insert hanger loop at middle of back during this operation.	512	SSa-2	9-10	50-3	50-3
	d) Turn collar to finish position with collar rolled 1/8 inch above edge of body and bartack with a horizontal 3/8 inch bartack at each bottom end of collar.	Bartack		28 each BT	50-3	50-3
8.	Make sleeves					
	a) Join under sleeve to top sleeve with a 3/8 inch seam.	512	SSa-2	9-10	50-3	50-3
	b) Turn in 5/8 inch of sleeve end then fold forming a 3/4 inch hem.	301	EFb-1	9-10	50-3	50-3
9.	Attach label					
	a) Stitch identification label on all four sides, placed 1/2 inch below center neck-line (±1/2 inch off center).	301	EFb-1	9-10	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the currentversion before use.

TABLE IV. Manufacturing operations - Continued.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
10.	Front facing					
	a) Turn in 1-3/8 inch of front edge and stitch through front 1/16 to 1/8 inch from edge to form a double ply front facing of 1-1/4".	101	EFb-1	6-8	50-3	50-3
11.	Attach pockets					
	The two front and the left breast patch pocket shall be positioned with the side edge of the pocket parallel to the front edge of the robe. Front pockets shall measure 6-3/8 inches wide at top and 6-7/8 inches deep. Breast pocket shall measure 4-3/4 inches wide and 5-1/4 inches deep. (± 1/4 inch tolerance.)					
	a) Place pockets on fronts, as indicated by marks on patterns, turn in raw edges and stitch 1/16 to 1/8 inch from edge.	301	SSb-1	9-10	50-3	50-3
	b) Place breast pockets on left front (when worn) as indicated by marks on patterns, and with the side edge parallel to the edge or robe, turn in raw edges and stitch 1/16 to 1/8 inch from edge.	301	SSb-1	9-10	50-3	50-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturing operations - Continued.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
	c) As an alternate, the side pockets may be sewn into the side seams.					
12.	Join shoulder seam, join sleeves to armholes.					
	a) Join shoulder seam using a 3/8 inch seam.	512	SSa-2	9-10	50-3	50-3
	b) Join sleeve to armhole using 3/8 inch seam.	512	SSa-2	9-10	50-3	50-3
13.	Sideseam w/attach belt					
	a) Join side seams using a 3/8 inch seam. Insert half belts during operation (and side pockets if applicable).	512	SSa-2	9-10	50-3	50-3
14.	Hem bottom					
	a) Turn in 5/8 inch of bottom edge and fold forming a 3/4 inch hem. Stitch through 1/16 to 1/8 inch from edge.	301	EFb-1	9-10	50-3	50-3
15.	Bartacks					
	a) Pocket openings, sleeve ends, collar edges, shall be secured by bartacks, or triangular tack where specified	Bartack		28 stitches ea BT	50-3 or 50-2	50-3 or 50-2
16.	Clean Robes					
	a) All ends of threads shall be trimmed and all loose threads, stains, and pin tickets shall be removed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The finished robes shall conform to the measurements shown in table V.

TABLE V. Table of measurements (inches).

	Medium	Large	Tolerance ±
Sweep 1/	68-1/4	71-1/2	1
Sleeve inseam 2/	19	19	3/4
Back length 3/	47	47-1/2	1

1/ Sweep. - Measure along bottom edge of robe including front facing.

2/ Sleeve inseam. Measure along the inseam of sleeve from armhole joining seam to bottom of sleeve.

3/ Back length. Measure from center of back at collar joining seam to bottom of hem.

3.9 Workmanship.- The finished robe shall conform to the quality of the product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examination and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the currentversion before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. When certificates of compliance are submitted the Government reserves the right to check test to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.2), it shall be examined for the defects specified in 4.4.2.1 and 4.4.2.4. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Sampling for testing. Unless otherwise specified in the component specifications, testing shall be in accordance with table VI. The lot shall be unacceptable if one or more sample units fails to meet any test requirement specified. The sample unit for testing the braid (see 3.3.5) shall be 1-1/2 yards and the lot shall be expressed in "yards". The sample unit for testing the untreated cloth shall be 1/2 linear yard and three linear yards for the treated cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

Lot size	Sample size
800 or less	2
801 up to including 22,000	3
22,001 and over	5

TABLE VI. Test methods.

Component and Characteristic	Requirement Paragraph	Test Method
Untreated Basic Cloth:		
Polyester identification	3.3.1.1	Any standard method 1/
Cotton identification	3.3.1.1	1200 1/
Polyester content	3.3.1.1	Any standard method 1/
Nonfibrous material	3.3.1.1	2611 1/
Slack beam take up	3.3.1.1	4110 1/ 2/
Ply	3.3.1.1	Visual 1/
Weave	3.3.1.2	Visual 1/
Color comparison	3.3.1.2	Visual 1/
Treated and Cured Basic Cloth:		
Weight	3.3.1.4	4.4.4 and Test 5041*
Breaking strength	3.3.1.4	4.4.4 and Tests 5100
pH	3.3.1.4	2811*
Dimensional stability	3.3.1.4	4.4.4 through 4.4.4.2
Colorfastness to:		
Laundering (3 cycles)	3.3.1.4	Test 5610*
Light	3.3.1.4	Test 5660*
Braid-Hanger Loop:		
Material	3.3.3	1200 or Test 1500 1/*
Width	3.3.3	Visual
Breaking strength	3.3.3	Test 5100 3/*

*Requirements of FED-STD 191.

1/ A certificate of quality may be submitted for the stated requirement.
2/ The following changes shall be incorporated in the test method:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

a. Substitute the word "take-up" wherever the word "crimp" appears.
b. The test specimen shall be a slack warp yarn removed from a 14-inch length of cloth.
c. Delete the formula for percent crimp and substitute as follows:

$$\text{Take-up, percent} = \frac{L - 10}{L} \times 100$$

L = Total distance between marks under tension.

3/ The width of the jaws shall be greater than the width of the braid.

4.4.2 Classification of defects. The defects found during examination shall be classified in accordance with 4.4.2.1 table VII and 4.4.2.3.

4.4.2.1 General defects.

TABLE VII. Classification of defects.

Defects	Classification		
	Major	Minor	
		A	B
Material detects and workmanship damages			
a. Any weakening defect such as a smash, multiple float or loose slub.	X		
b. Shade bar, unslightly slub, dye or finishing streak.		X	
c. Hole, cut, tear, visible mend, burn, or a needle chew that may develop into a hole	X		
Notes: Material defects and workmanship damages are to be classified as indicated when the defect definitely weakens the fabric. If the defect does not definitely weaken the fabric but is conspicuous when the item is worn, classify as indicated. Material defects or workmanship damages which are inconspicuous and do not definitely weaken the fabric shall not be classified as defects.			

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Defects	Classification		
	Major	Minor	
		A	B
Shaded parts			
a. Badly shaded parts (except parts permitted to be cut from ends).	X		
b. Parts permitted to be cut from ends badly shaded.		X	
Cleanness			
a. Spot or stain on outside		X	
b. Thread ends not trimmed, or loose threads, or one or more shade tickets not removed.			X
c. Shade stamp marking exposed on outside.	X		
d. Any visible basting stitch.			X
Components and assembly			
Any component part or assembly omitted (unless otherwise classified herein).	X		
Cutting			
Any component part not cut in accordance with specification requirements.	X		
Seams and stitching			
a. Accuracy of seaming			
1. Seam or hem twisted, puckered or pleated.	X		
2. Part of garment caught in any unrelated operation or stitching.	X		
3. Wrong shade or varying shades of thread used on outside of garment.			X
4. Ends of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Defects	Classification		
	Major	Minor	
		A	B
5. Ends of continuous lines of stitching backtacked less than 1/2 inch.		X	
6. Thread break(s) stitched less than 1/2 inch beyond each end of break.		X	
b. Gage of stitching			
1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged, affecting appearance.		X	
2. Not within range of gage specified or varies more than 1/16 inch when no range is specified.			X
c. Open seams			
1. All seams except sleeve, pocket or bottom hem.			
- up to 1/4 inch inclusive			X
- over 1/4 inch to 1 inch inclusive		X	
- over 1 inch	X		
2. On bottom hem:			
- over 1/2 inch			X
Note: Broken or continuous skipped or run-off stitches constitute an open seam. A double-stitched seam is considered open when either side of the seam is open.			
d. Stitches skipped or broken (on edge, top or raise), (stitching when seam is seamed, turned and stitched)			
- over 1/4 inch to 1/2 inch, inclusive			X
- over 1/2 inch		X	

Source: https://assist.dla.mil -- Downloaded: 202640-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Defects	Classification		
	Major	Minor	
		A	B
e. Raw edges - A raw edge is classified as such when it occurs along an edge required to be turned under but the edge is securely caught in the stitching. If the edge is not securely caught in the stitching, score as an open seam.			
1. Any raw edge (on outside)			
- over 1/4 inch to 3/4 inch, inclusive			X
- over 3/4 inch		X	
2. Any raw edge (on inside)			
- over 1/2 inch to 2 inches, inclusive			X
- over 2 inches		X	
f. Run-offs			
1. On joining seams, when resulting in an open seam, score as "Open seam".			
2. On edge, top or raise stitching when not resulting in open seam (outside only)			
- over 1/2 inch to 1 inch, inclusive			X
- over 1 inch		X	
g. Not specified seam or stitch type.		X	
h. Stitch tension-(Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching).			
1. Loose tension, resulting in a loose seam.	X		
2. Loose tension on edge, top or raise stitching, recognized by loosely exposed loops of top or lower thread.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Defects	Classification		
	Major	Minor	
		A	B
3. Tight tension (stitches break when normal strain is applied to seam or stitching), score as "Open seam".		X	
i. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching).			
1. Less than minimum specified:			
- 1 stitch			X
- 2 stitches		X	
- 3 or more stitches	X		
2. One or more stitches in excess of maximum specified.			X
Label			
a. Missing, incorrect, or illegible.	X		
b. Not securely attached, as specified.		X	
c. Not specified color.	X		
Bartacks			
a. Missing, insecure, or misplaced not serving intended purpose.			
- one bartack			X
- two bartacks		X	
- three or more bartacks	X		
b. Not specified length.			X
4.4.2.2 Detailed defects applicable to specific parts.			
a. Collar			
1. Excessive fullness on undercollar or collar facings.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the currenversion before use.

TABLE VII. Classification of defects - Continued.

Defects	Classification		
	Major	Minor	
		A	B
b. Breast pocket			
1. Set on crookedly or poorly shaped affecting appearance.		X	
2. Placed on right front.		X	
3. Hem less than 5/8 inch or more than 7/8 inches.			X
4. Hem finishing on outside of pocket.		X	
5. Less than 5-1/4 or more than 5-3/4 inches wide.		X	
6. Less than 5-1/2 or more than 6 inches in depth.		X	
7. Corners of opening not securely tacked.		X	
c. Side pockets			
1. Set on crookedly or poorly shaped affecting appearance.		X	
2. Hem less than 3/4 inch or more than 1-1/4 inches.			X
3. Hem finishing on outside of pocket.		X	
4. Less than 6 or more than 6-1/2 inches wide.		X	
5. Less than 6-3/4 or more than 7-1/4 inches in depth.		X	
6. Corners of opening not securely tacked.		X	
7. Out of alignment by more than 1/2 inch.		X	
d. Fronts			
1. Uneven by more than 1/2 inch but not more than 1 inch at bottom.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Defects	Classification		
	Major	Minor	
		A	B
2. Uneven by more than 1 inch at bottom when buttoned.	X		
3. Edges uneven or not properly forced out, affecting appearance.		X	
e. Hem (bottom)			
1. Width less than 5/8 or more than 7/8 inches.			X
2. Badly twisted or puckered.		X	
f. Hanger			
1. Off center of back facing seam by more than 1/4 inch.			X
2. Length less than 2-1/2 or more than 3-1/2 inches.			X
3. Width not as specified.		X	
4. Ends not securely caught in collar facing stitching.		X	

4.4.2.3 Size measurements defects (Finished measurements).

a. 1/2 of breast
b. Sleeve inseam
c. Back length

Any measurement deviating from the nominal dimensions and tolerances included in table V shall be scored as a size measurement defect.

4.4.2.4 Acceptable quality levels and inspection levels. The inspection levels and acceptable quality levels expressed in defects per 100 units (DHU) shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the current version before use.

For paragraphs 4.4.2.1 and 4.4.2.2

Inspection level II of MIL-STD-105

Major	- 2.5
Major and Minor A combined	- 15.0
Major and Minor A and B combined	- 25.0

For paragraph 4.4.2.3

Inspection level S-3 of MIL-STD-105

Defects (one class)	- 4.0

4.4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as open or noncontinuous heat sealed seams of unit packages, incomplete closure of container flaps, loose strapping, inadequate stapling. Bulged or distorted container.
Content	Weight more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

4.4.4 Treated and cured basic cloth. Prior to determining the weight, yarns per inch and breaking strength characteristics of the treated and cured basic cloth, the treated and cured smock cloth shall be laundered and dried for 15 times as specified in 4.4.4.1 through 4.4.4.1.2. The dimensional stability characteristic shall be determined on specimens of the treated and cured basic cloth prepared and then laundered for 15 times as specified in 4.4.4.2. The pH and colorfastness characteristics shall be determined on the treated and cured basic cloth in the cured condition prior to laundering.

4.4.4.1 Laundering and drying.

4.4.4.1.1 Apparatus, detergent and ballast. The apparatus, detergent and ballast to be used in the laundering procedure shall be as follows:

a. Kenmore Automatic Washing Machine Model 600 or equivalent. In the event of a dispute, the Kenmore Automatic Washing Machine Model 600 shall be used.
b. Kenmore Automatic Dryer Model 600 or equivalent.
c. AATCC Standard Detergent 124 or equivalent.
d. Ballast consisting of 36 by 36 inches of hemmed Type 128 cotton sheeting to be added to the inspection samples, if necessary, to make up a four pound load.

4.4.4.1.2 Procedure. The inspection samples, and when necessary, the ballast to make up a four pound load, shall be placed in the washing machine. The washer shall be set for the high water level, hot water temperature and a 12 minute wash on the "Permanent Press" cycle. The water used shall have a maximum hardness of 50 parts per million. The temperature of the water shall be 140 ± 5°F (60 ± 2.7°C). Fill the washer to the high water level mark and add 140 ± 1 grams of the detergent. When the washer has completed the final spin cycle, remove the inspection samples and ballast immediately and if tangled, separate them from each other. Then place the washed inspection samples and ballast in the dryer. Dry at the "Permanent Press" cycle and at a setting which shall generate an exhaust temperature of 140 to 160°F (60 to 71.1°C). The dryer shall be operated until the washed inspection samples and ballast are dried. Then for a cooling down cycle continue to operate the dryer without any heat for an additional 5 minutes. Upon completion of the cooling down cycle, remove the inspection samples and ballast immediately and repeat the washing and drying cycles until a total of 15 washings and dryings have been completed. Upon completion of the 15th washing and drying cycle, the inspection samples shall be conditioned to equilibrium under standard atmospheric conditions as specified in FED-STD-191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

4.4.4.2 Dimensional stability. Three specimens, 22 by 22 inches, measured parallel to the warp and filling, shall be cut from each treated and cured smock cloth inspection sample. If necessary, the specimens shall be pressed flat. Two specimens shall be cut from the sides of each sample unit, one from each side, within three inches from each selvage edge. The third specimen shall be cut from the center of each inspection sample. No two specimens shall contain the same filling yarns. The specimens shall be conditioned to equilibrium under standard atomospheric conditions as specified in FED-STD-191. The conditioned specimens shall be laid flat, without tension, on a smooth flat surface and shall be free from any wrinkles and creases. Three distances, each a minimum of 18 inches, shall be measured and marked parallel to the warp and filling directions of each specimen. Each pair of markings shall be a minimum of 6 inches apart and within one inch from any edge of the specimen. The beginning and ending of each 18 inch distance may be marked with a fine pointed pen or stamping using indelible ink or by sewing fine threads into the specimen. The measured distances shall be parallel to the respective yarns. The marked specimens shall be laundered and dried for 15 times and conditioned to equilibrium as specified in 4.4.4.1.2. After being conditioned to equilibrium, the specimens shall be measured to determine the dimensional stability. The dimensional stability for each specimen shall be calculated as follows:

$$\text{Dimensional change, percent} = \frac{A - B}{A} \times 100$$

A = Average of the 3 initial measurements in the warp or filling direction, as applicable, per specimen.

B = Average of the 3 measurements after laundering, drying and conditioning in the warp or filling direction, as applicable, per specimen.

The dimensional change of each sample unit shall be the average of the warp and filling directions, as applicable, of the 3 specimens inspected. The dimensional change shall be reported to the nearest 0.1 percent for each direction. The individual results used to calculate the average shall also be reported.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each robe shall be neatly folded to approximately 16-1/2 by 11-1/2 inches in such a manner that the size label is clearly visible so as to permit ready identification. Each folded robe shall be inserted in a snug-fitting, flat style, clear polyethylene film bag of 0.00125 - inch thickness (+ 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag closure shall be effected by heat sealing with the heat seal as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the bag to allow the excess air to escape. Alternatively, the final closure of the bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level C. Robes shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Fifty Robes of one class and size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, V2s or V3s of PPP-P-636, class weather-resistant. The inside of each fiberboard shipping container shall be fitted with a taped liner conforming to grade V3c of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B to UU-P-268. Each shipping container shall be closed, waterproofed and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 Level B. Fifty robes of one class and size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 275 of PPP-P-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.3 Level C. Robes, packaged as specified shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

5.2.4 Unitized loads. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be used whenever total quantities for shipment to one destination exceed 250 pounds or 20 cubic feet. Loads shall be unitized on pallets conforming to MIL-STD-147. Quantities less than 20 cubic feet need not be unitized. Pallet loads including the pallet shall not exceed 54 inches in height, 48 inches in width, and 40 inches in length. Pallet shall conform to Type IV or Type V.

5.3 Marking.

5.3.1 Levels A, B and C. Each unit pack, intermediate package, exterior container and unitized load shall be marked as specified in MIL-STD-129.

5.3.1.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification markings legibly printed or stamped in black directly on the bag across the center face, or information may be printed on a white paper label inserted within the bag or garment shall be folded so that garment label is visible.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes shall be have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words 'MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity of sizes contained therein.

5.4 General.

5.4.1 Exterior container. Exterior container (see 5.2.1, 5.2.2, and 5.2.3) shall be of minimum tare and cube consistent with the protection required and shall contain equal quantities of identical stock numbered items to the greatest extent practicable.

6. NOTES. Information for Guidance only

(This section contains information of a general or explanatory nature which is helpful but not mandatory).

6.1 Intended use. This item is intended for wear by hospital patients.

6.2 Ordering data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 202610-16T14:00Z
Check the source to verify that this is the currentversion before use.

a. Title, number and date of this specification.
b. Sizes required (see 1.2).
c. When first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. Whether V-board containers are required for level B shipments (see 5.2.2).

6.3 All changes in this specification or modification at time of procurements shall be coordinated with the Directorate of Medical Materiel.

6.4 Standard sample. For access to standard sample, address the procuring office issuing the invitation for bids.

6.5 Asterisks or vertical lines are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

6.6 Subject term (keyword) listing.

Dressing Robe
Striped Seersucker
Polyester/Cotton
Durable Press

NSN	Item Identification	Size
6532-01-098-8344	ROBE, DRESSING	Size 1 - Medium
6532-01-098-8345	(Striped Seersucker)	Size 2 - Large

Custodians:
Army - GL
Navy - MS
Air Force - 03

Preparing activity:
DLA - DM

Review activities:

Army - MD
Navy - MS
Air Force - 03

Project No. 6532-1174

Location: MILSP/ROBE/H15-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-R-2023C	ROBE, DRESSING (Striped Seersucker)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T14:00Z
Check the source to verify that this is the current version before use.