[INCH-POUND]
A-A-59529
December 13,1999
SUPERSEDING
MIL-C-29136
16 December 1974

COMMERCIAL ITEM DESCRIPTION

CAP, FOOD HANDLER'S

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description covers the requirements for a food handler's cap used by cooks and bakers of the Department of the Navy.

2. CLASSIFICATION. The cap shall be one type only, and shall be available in the following sizes:

Sizes

Small (6-3/4) Medium (7-1/8) Large (7-1/2)

3. SALIENT CHARACTERISTICS.

3.1 Description. The cap shall be a turn-up style, two-piece construction, consisting of a two-ply circular headband and a flat circular crown. When worn, the headband shall be turned up to form four plies (see Figure 1).

3.2 Material.

3.2.1 Basic material. The cloth used for the headband of the cap shall be of a cotton combed twill or polyester/cotton twill material, 2 up 1 down left hand twill durable press, match Color Association (CA) White Shade 3053, and conform to the requirements specified in Table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, ATTN: DPSC-CRFD, 700 Robbins Avenue, Building 6D, Philadelphia, PA 19111-5092.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements

Characteristics 1/	Requirements	Test methods
Yarn ply	Singles	Visual
Weave	2 up1 down left hand twill	Visual
Fiber Content	65±5% polyester with the remaining % cotton	AATCC 20A
Sulfur Content	No more than slight	FED-STD-191A TM 2020
Colorfastness to:		
Laundering (3 cycles	Not less than grade 3	AATC 61 TEST 3A 3/ 4/
Presperation	Not less than grade 3	AATCC 15 4/
Light (40 hrs)	Not less than grade 3	AATCC 16 Opt A
Crocking	Not less than 3	AATCC 8
Discoloration to:		
Laundering (3 cycles)	Not less than grade 3	AATCC 61 Test 3A 3/ 4/
Perspiration	Not less than grade 3	AATCC 15 4/
Light (40 hrs)	Not less than grade 3	AATCC 16 Opt A
Wet-Dry Cleaning	Not less than grade 3	AATCC 132
Combined Laundering and Bleaching	Not less than grade 3	AATCC 61 Test 4A 4/
Weight, (oz/sq. yd., min.)	6.8	ASTM-D-3776 OPT C
Breaking strength, lb., (min)		
Warp	170	ASTM-D-5034
Filling	85	ASTM-D-5034
Stiffness, in-lbs (max)		ASTM-D-747
Warp	.002	
Fill	.002	
Tear Strength, lb., (min)		
Warp	7.0	ASTM-D-1424
Fill	5.0	ASTM-D-1424
Nonfibrous materials, Percent (max)	2.0	ASTM-D-629
Dimensional Stability, warp and fill After 5 cycles, % max	2.5	AATCC-135 (3) Vaiii
Soil Release	Not less than 3.0	See below
Durable Press after 5 cycles	Not less than DP 3.0	AATCC 124 (3)Vaiii
pH	5-8.5	AATCC-81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

1/ Testing shall be performed under standard atmospheric conditions for textiles as specified in ASTM –D-1776 (temperature of 70^0F $\pm$ 2^0F and a relative humidity of 65 percent $\pm$ 2 percent)
2/ One determination shall be made from each sample unit and the result shall be reported as "pass" or "fail".
3/ The specimen must be dried after each of the 3 laundering cycles.
4/ Only the staining on the cotton and polyester stripes of the color transfer cloth shall be evaluated.

Soil Release Test Procedure. The test shall be in accordance with the requirements below.

Specimens. There shall be three (30 4x8 inch specimens taken from different warp and filling yarns.

Staining. The test specimens shall be stained in accordance with AATCC TM 130, except for the following: Three drops of Graphite Multi-Grade Motor Oil (SAE 10W-40).

Laundering. The test specimens shall be laundered in accordance with AATCC TM 61, Test No. IIIA, except the following:

(1) The total liquor volume shall be 500 ml.
(2) Fifteen grams per liter of AATCC (124 WOB) detergent shall be used.
(3) A total of 50 stainless steel balls shall be used.
(4) No multi-fiber test fabric or bleached cotton fabric is required.
(5) At the end of cycle, rinse in running water at 105^0F, for five minutes. No scouring is required.
(6) Hydroextract the test specimen to remove excess moisture. Air dry or oven dry at 220^0F.

Evaluation. The test specimen shall be evaluated with AATCC TM 130 procedure.

The cloth shall be desized, scoured, mercerized, bleached, heat set and dyed. The cloth shall be treated with an approved precured durable press resin and approved soil release treatment to obtain a hand equal in characteristics to that of the standard sample and shall meet the requirements specified. The resin finish shall be a non-chlorine retentive type.

3.2.1 Net cloth. The net cloth used for the cap crown shall be cotton or polyester, shall approximate CA White Shade 3053 and conform to the requirements specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

TABLE II. Physical requirements of crown cloth

Characteristic	Requirements		Test method
	Leno weave	Raschel knit	
Meshes per inch (min.)			
Warp	7	5	ASTM-D-3775
Filling	7	5	ASTM-D-3775
Weight, oz/sq. yd.			
Minimum	4	1.8	ASTM-D-3776 OPT-A
Maximum	6	4	ASTM-D-3776 OPT-A
Nonfibrous material, percent	6.0	3.0	ASTM-D-629
pH	5.5 – 8.5	5.5 – 8.5	ASTM-D-2165

3.2.2 Color. The color of the test specimen shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight, and that have a correlated color temperature of 7500K (+/- 200K), with illumination of 100 (+/- 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2300K (+/- 200K). When specified bleached whites, fluorescent materials, or materials containing optically brightened fibers shall be checked for matching fluorescence, against the standard sample, using an ultraviolet source.

3.2.3 Thread. The thread shall be cotton, conforming to Type I, 50 and 70; 3-ply and 2-ply of A-A-52094 or a cotton-covered polyester thread conforming to 70, 3-ply and 80, 2-ply of A-A-50199. The color shall be white.

3.3 Labels. Each cap shall be marked with a combination identification and size label.with characters a minimum of 18-points (approximately 1/4 inch) and the print shall be black showing fastness to laundering only when tested in accordance with AATCC 61, Test 3A. With the headband unfolded, place the markings on the outside adjacent to headband seam and approximately 3/4 inch above the bottom edge. The markings shall be on the inside when the headband is in its finished position. The following inscription shall be used.

CAP, FOOD HANDLER'S
HEADBAND (Fiber Type)
CROWN (Fiber Type)
CONTRACT NO.: SPO100-000-0000 (Example)
STOCK NO.: 8415-00-000-0000 (Example)
SIZE: Medium (7-1/8) (Example)
NAME OF SUPPLIER:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

3.3.1 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.4 Sizes and measurements. The finished measurements of the cap shall conform to Table III. All measurements and tolerance are expressed in inches, and shall be taken without pulling or stretching the cap.

TABLE III. Finished measurements

Size	Circumference (inside)	Height of headband 1/
Small (6-3/4)	21-1/4	7-1/2
Medium (7-1/8)	22-3/8	7-1/2
Large (7-1/2)	23-1/2	7-1/2
Tolerance	-0, + 3/8	+/- 1/4

1/ With the headband unfolded, measure from the base of the headband to the top of headband.

3.5 Patterns. The Government will furnish a set of standard patterns to be used to cut working patterns. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, servicability, or appearance requirements. The standard patterns provide a seam allowance of 1/4 to 5/16 inch.

4. REGULATORY REQUIREMENTS.

4.1 Flammability requirements. The basic material shall conform to the rules and regulations of the Flammability Fabrics Act without the application of a flame retardant finish to material or the end item.

4.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered or environmentally referable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products offered shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Visual examination. Each cap shall be examined for the defects listed below.

5.2.1 Defects. Any hole, cut or tear, or needle chew on outside or inside; any mend, darn, or splice, friction burn; sweatband twisted or puckered; color not as specified; any spot or stain (outside); raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; any material defects, distorted parts, or poor workmanship; any component part omitted; label missing, incorrect, or illegible; any knot or slub on outside; crown loose, not positioned or attached as specified; measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or order.

5.3 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

6. PACKAGING

6.1 Preservation, packing, and marking. The preservation, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-D-629 - Quantitative Analysis of Textiles

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

ASTM-D-747 -	Stiffness of Woven Fabrics
ASTM-D-1424-	Tearing Strength of Woven Fabrics by Falling- Pendulum Type (Elmendorf) Apparatus
ASTM-D-2165-	pH of Aqueous Extracts of Wool and Similar Animal Fibers
ASTM-D-3775-	Fabric Count of Woven Fabric
ASTM-D-3776-	Mass Per Unit Area (Weight) of Fabric
ASTM-D-5034-	Breaking Force and Elongation of Textile Fabrics (Grab Test)

(Applications for copies should be addressed to American Society for Testing and Materials (ASTM), 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

AATCC 61	-	Colorfastness to Laundering, Home and Commercial: Accelerated
AATCC 96	-	Dimensional Changes in Commercial Laundering of Woven and Knitted Fabrics Except Wool
AATCC-124	-	Appearance of Fabric After Home Laundering
AATCC-130	-	Soil Release
AATCC-81	-	pH of Water Extract from Bleached Textiles
AATCC-135	-	Dimensional Changes in Automatic Home Laundering
AATCC-15	-	Colorfastness of Perspiration
AATCC-16	-	Colorfastness to Light
AATCC-8	-	Colorfastness to Crocking
AATCC-20	-	Fiber Analysis

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P. O. Box 12215, Research Triangle Park, NC 27709-2215.)

COLOR ASSOCIATION OF THE UNITED STATES

(CA) WHITE SHADE 3053

(Standard shades may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If standard shades are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

Custodian:
Navy - NU

Preparing Activity:
DLA - CT

Project 8415-0131

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.

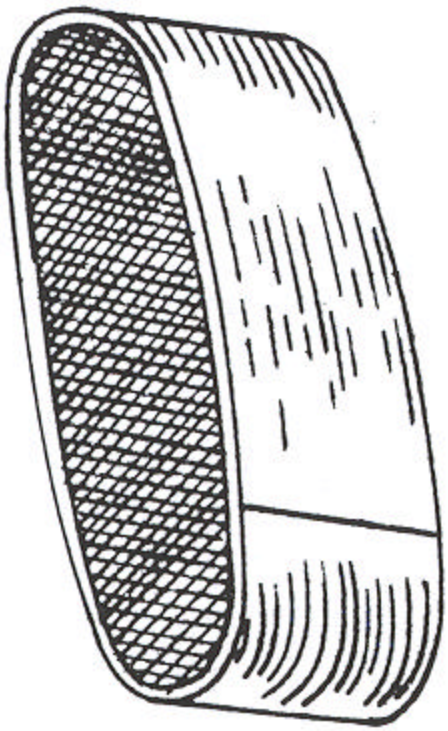


FIGURE 1 CAP FOOD HANDLER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:17Z
Check the source to verify that this is the current version before use.