
MILITARY SPECIFICATION SHEET

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, STEP-UP, CATEGORY 1A (FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049

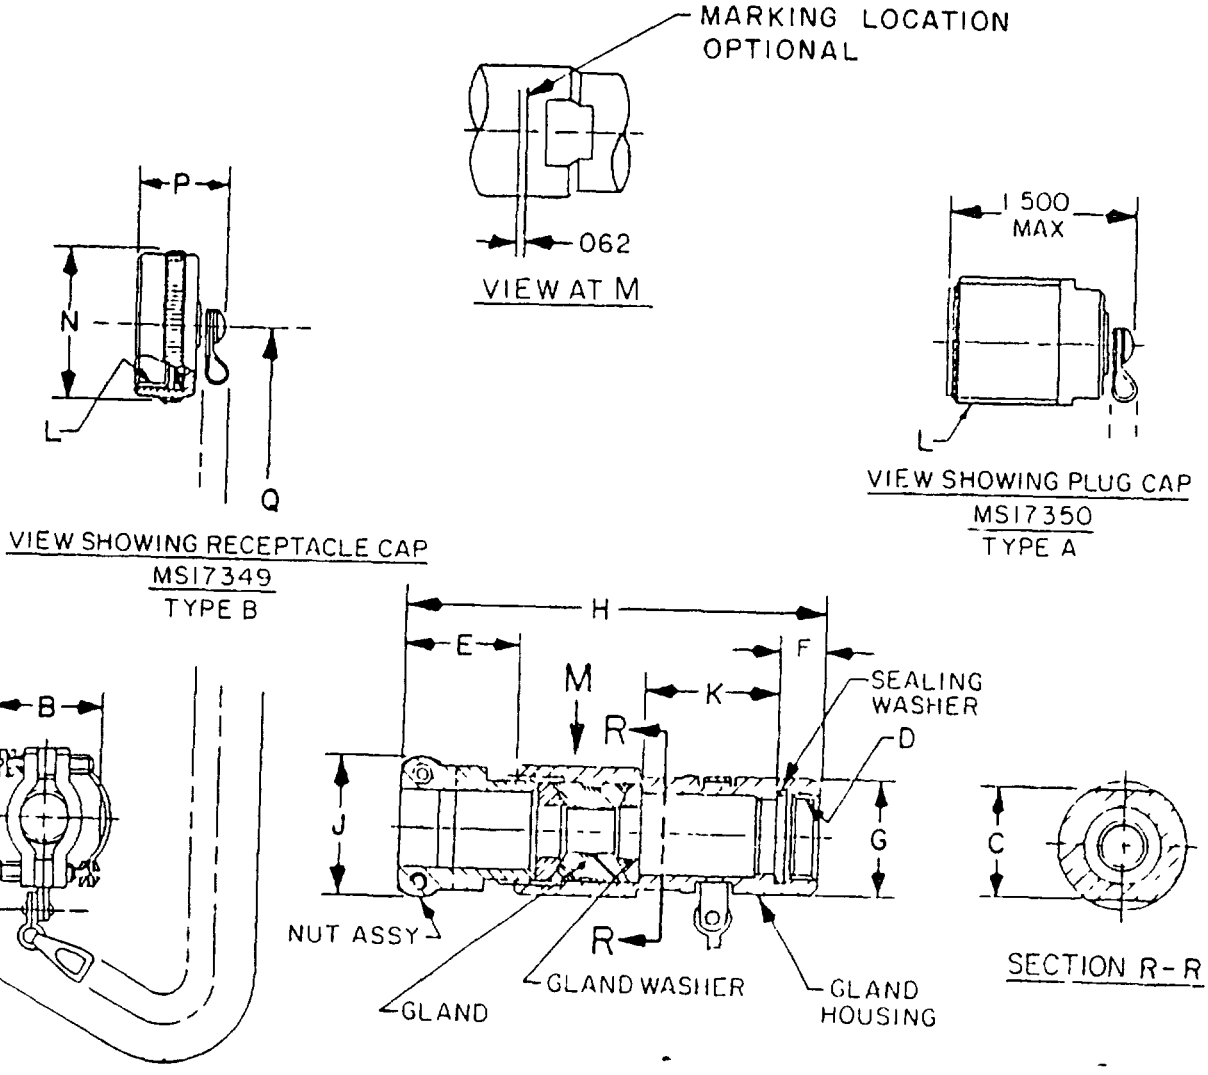

Configuration A Style 1 cable sealing

FIGURE 1 Configurations and dimensions

Ⓐ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
1	12	.530	.436	1.000	.812	.7500-20 UNEF	1.062	.479	.938	4.275	1.375	1.219	.8750-0 1P-0.2L-DS	1.094	.765	5.00
2	12	.500	.406	.875	.938	.7500-20 UNEF	.969	.479	.938	3.678	1.125	.871	.8750-0 1P-0.2L-DS	1.094	.765	5.00
3	12	.405	.311	1.000	.812	.7500-20 UNEF	1.062	.479	.938	4.275	1.375	1.219	.8750-0 1P-0.2L-DS	1.094	.765	5.00
4	14	.605	.511	1.000	1.062	.8750-20 UNEF	1.062	.479	1.062	4.177	1.375	1.121	1.0000-0 1P-0.2L-DS	1.219	.765	5.00
5	14	.625	.531	1.062	1.125	.8750-20 UNEF	1.062	.479	1.062	4.489	1.562	1.371	1.0000-0 1P-0.2L-DS	1.219	.765	5.00
6	14	.530	.436	1.000	1.062	.8750-20 UNEF	1.062	.479	1.062	4.177	1.375	1.121	1.0000-0 1P-0.2L-DS	1.219	.765	5.00
7	14	.405	.311	1.000	1.062	.8750-20 NEF	1.062	.479	1.062	4.177	1.375	1.121	1.0000-0 1P-0.2L-DS	1.219	.765	5.00
8	18	.828	.715	1.188	1.250	1.1250-18 NEF	1.094	.479	1.312	4.584	1.688	1.343	1.2500-0 1P-0.2L-DS	1.469	.980	5.00
9	20	.750	.637	1.312	1.375	1.1250-18 NEF	1.094	.479	1.438	4.647	1.812	1.371	1.3750-0 1P-0.2L-DS	1.562	.980	5.00
10	20	1.000	.875	1.546	1.375	1.1250-18 NEF	1.281	.479	1.438	4.896	2.125	1.371	1.3750-0 1P-0.2L-DS	1.562	.980	5.00
11	20	.900	.787	1.312	1.375	1.2500-18 NEF	1.094	.479	1.438	4.647	1.812	1.371	1.3750-0 1P-0.2L-DS	1.562	.980	5.00
12	20	1.055	.930	1.546	1.375	1.2500-18 NEF	1.281	.479	1.438	4.896	2.125	1.371	1.3750-0 1P-0.2L-DS	1.562	.980	5.00
13	22	1.000	.875	1.546	1.625	1.3750-18 NEF	1.281	.479	1.562	4.896	2.125	1.371	1.5000-0 1P-0.2L-DS	1.688	.980	6.00
14	22	1.109	.984	1.546	1.625	1.3750-18 NEF	1.281	.479	1.562	4.896	2.125	1.371	1.5000-0 1P-0.2L-DS	1.688	.980	6.00

Configuration A Style 1 cable sealing - Continued

FIGURE 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
15	24	1.180	1.055	1.780	1.875	1.6250-18 UNEF	1.281	.479	1.812	4.959	2.469	1.372	1.7500-0.1P-0 2L-DS	1.938	980	6.00
16	24	1.310	1.185	1.780	1.875	1.6250-18 UNEF	1.281	.479	1.812	4.959	2.469	1.372	1.7500-0.1P-0 2L-DS	1.938	980	6.00
17	24	1.230	1.105	1.780	1.875	1.6250-18 UNEF	1.281	.479	1.812	4.959	2.469	1.372	1.7500-0.1P-0 2L-DS	1.938	980	6.00
18	24	1.375	1.250	2.000	1.875	1.6250-18 UNEF	1.281	.479	1.812	4.959	2.625	1.309	1.7500-0.1P-0 2L-DS	1.938	980	6.00
19	28	1.445	1.320	2.000	2.062	1.8750-16 UN	1.281	.479	2.062	5.021	2.625	1.371	2.0000-0.1P-0 2L-DS	2.219	980	6.00
20	28	1.531	1.406	2.000	2.062	1.8750-16 UN	1.281	.479	2.062	5.021	2.625	1.371	2.0000-0.1P-0 2L-DS	2.219	980	6.00
21	28	1.375	1.250	2.000	2.062	1.8750-16 UN	1.281	.479	2.062	5.021	2.625	1.371	2.0000-0.1P-0 2L-DS	2.219	980	6.00
22	32	1.656	1.531	2.250	2.312	2.0625-16 UNS	1.281	.479	2.312	5.083	2.953	1.370	2.2500-0.1P-0 2L-DS	2.469	980	6.00
23	32	1.828	1.700	2.438	2.312	2.0625-16 UNS	1.391	.479	2.312	5.385	3.171	1.375	2.2500-0.1P-0 2L-DS	2.469	980	6.00
24	32	1.562	1.437	2.250	2.312	2.0625-16 UNS	1.281	.479	2.312	5.083	2.953	1.370	2.2500-0.1P-0 2L-DS	2.469	980	6.00
25	32	1.730	1.605	2.438	2.312	2.0625-16 UNS	1.391	.479	2.312	5.385	3.171	1.375	2.2500-0.1P-0 2L-DS	2.469	980	6.00
26	36	1.900	1.775	2.438	2.500	2.3125-16 UNS	1.391	.479	2.562	5.354	3.171	1.344	2.2500-0.1P-0 2L-DS	2.719	980	6.00
27	36	1.730	1.605	2.438	2.500	2.3125-16 UNS	1.391	.479	2.562	5.354	3.171	1.344	2.2500-0.1P-0 2L-DS	2.719	980	6.00

Configuration A Style 1 cable sealing - Continued

FIGURE 1. Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size no	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
28	36	1.825	1.700	2.438	2.500	2 3125-16 UNS	1.391	479	2.562	5.354	3 171	1 344	2 5000-0 1P-0 2L-DS	2 719	980	6.00
29	36	1 984	1 859	2.438	2.500	2 3125-16 UNS	1.391	479	2.562	5 354	3 171	1.344	2.5000-0 1P-0 2L-DS	2 719	980	6.00
30	36	2 062	1.917	2 750	2.500	2 3125-16 UNS	1.391	.479	2.562	5 385	3 375	1.375	2 5000-0 1P-0 2L-DS	2.719	980	6.00
31	40	2 375	2 230	3 000	2.812	2 6250-16 UN	1.391	667	2.875	5 682	3 625	1 421	2 7500-0 1P-0 2L-DS	2 969	.980	6.00
32	40	2 250	2 105	2 875	2.625	2.6250-16 UN	1 391	667	2.875	5 682	3 500	1.421	2 7500-0 1P-0 2L-DS	2 969	980	6.00
33	40	2 145	2 000	2 750	2 625	2.6250-16 UN	1 391	667	2.875	5 620	3 375	1.422	2.7500-0 1P-0 2L-DS	2 969	.980	6.00
34	40	2 062	1 917	2 750	2.625	2 6250-16 UN	1 391	667	2 875	5 620	3 375	1 422	2.7500-0 1P-0 2L-DS	2 969	.980	6 00
(A) 35	44	2.328	2 183	2 875	2 750	2 8750-16 UN	1.382	667	3.125	6.471	3 531	2 218	3.0000-0 1P-0 2P-DS	3 217	980	6.00

Configuration A. Style 1 cable sealing - Continued

FIGURE 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

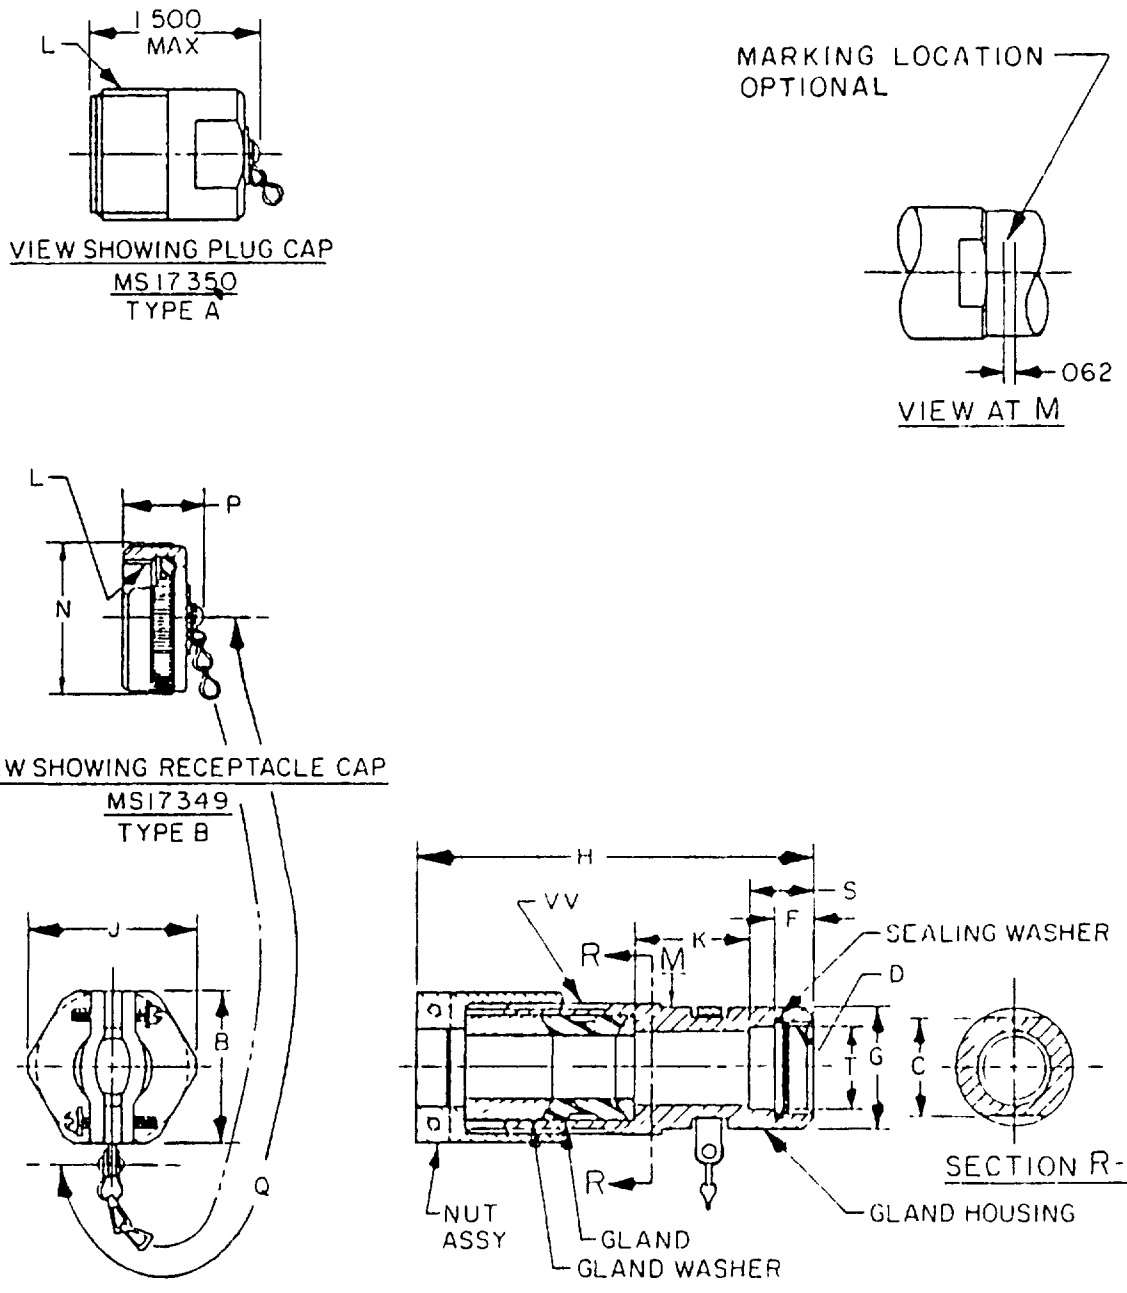

Configuration B Style 2 cable sealing

FIGURE 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size no.	Shell size	Cable range		B ±.005	C ± 000 - 010	D Thread Class 2B - LH	F ± 016	G DLA. ±.010 -.020	H Max	J Max	K ± 010
1	12	.521	.321	1.219	.938	0 7500-20 UNEF	479	.938	4.000	1.320	950
2	14	.646	446	1.344	1.062	0.8750-20 UNEF	479	1.062	4.100	1.420	1.075
3	16	.765	.565	1.469	1.188	1.0000-20 UNEF	479	1.188	4 800	1.600	1.200
4	18	.890	.690	1.625	1.312	1.1250-18 NEF	479	1.312	4.900	1 750	1.325
5	20	1.015	.815	1.750	1.438	1.2500-18 NEF	479	1.438	4 900	1 900	1.325
6	22	1.180	.980	2.000	1.562	1.3750-18 NEF	.479	1 562	4.900	2.190	1.325
7	24	1.430	1.230	2.250	1.812	1.6250-18 NEF	479	1 812	5.000	2.475	1 450
8	24	1.230	1.030	2.250	1.812	1 6250-18 NEF	.479	1.812	5 000	2.475	1 450
9	28	1 670	1.430	2.500	2 062	1.8750-18 UN	479	2.062	5 300	2.715	1 700
10	32	1.860	1.660	2.750	2 312	2 0625-16 N	479	2.312	5 600	2.900	1 950
11	36	2.110	1 860	3 062	2 562	2 3125-16 N	479	2.562	5 725	3 250	1 950
12	40	2.400	2.200	3.437	2.875	2.6250-16 UN	.667	2.875	5.725	3.625	1.950
13	40	2.200	2.200	3.437	2.875	2 6250-16 UN	.667	2 875	5.725	3.625	1 950

Configuration B Style 2 cable sealing - Continued

FIGURE 1 Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link	S ± 010	T Dia ± 005	VV Gland threads class 2-LH
1	12	8750-0 1P-0.2L-DS	1 094	765	5 00	1 425	600	1 0625-18 UNEF
2	14	1 0000-0 1P-0 2L-DS	1 219	765	5 00	1 425	726	1 1875-18 NEF
3	16	1 1250-0 1P-0 2L-DS	1 344	.980	5 00	1 605	845	1 3125-18 NEF
4	18	1 2500-0 1P-0 2L-DS	1.469	.980	5 00	1 605	970	1 4375-18 NEF
5	20	1.3750-0 1P-0 2L-DS	1 562	.980	5.00	1 605	1 095	1 5625-18 NEF
6	22	1 5000-0 1P-0.2L-DS	1.688	980	6.00	1 605	1.220	1.8125-16 N
7	24	1 7500-0 1P-0 2L-DS	1 938	980	6 00	1 605	1.470	2 0625-16 N
8	28	2 0000-0 1P-0 2L-DS	2 219	980	6 00	1 605	1.713	2 0625-16 N
9	28	2 0000-0 1P-0 2L-DS	2 219	980	6 00	1 605	1 713	2 3125-16 N
10	32	2 2500-0 1P-0 2L-DS	2 469	980	6 00	1.605	1.900	2 500-16 UN
11	36	2.5000-0.1P-0.2L-DS	2.719	.980	6 00	1.605	2 150	2 8750-16 UN
12	40	2.7500-0.1P-0 2L-DS	2.969	980	6 00	1.605	2 460	3 1250-16 UN
13	40	2 7500-0 1P-0 2L-DS	2.969	980	6.00	1 605	2 460	3 1250-16 UN

Configuration B Style 2 cable sealing - Continued

FIGURE 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

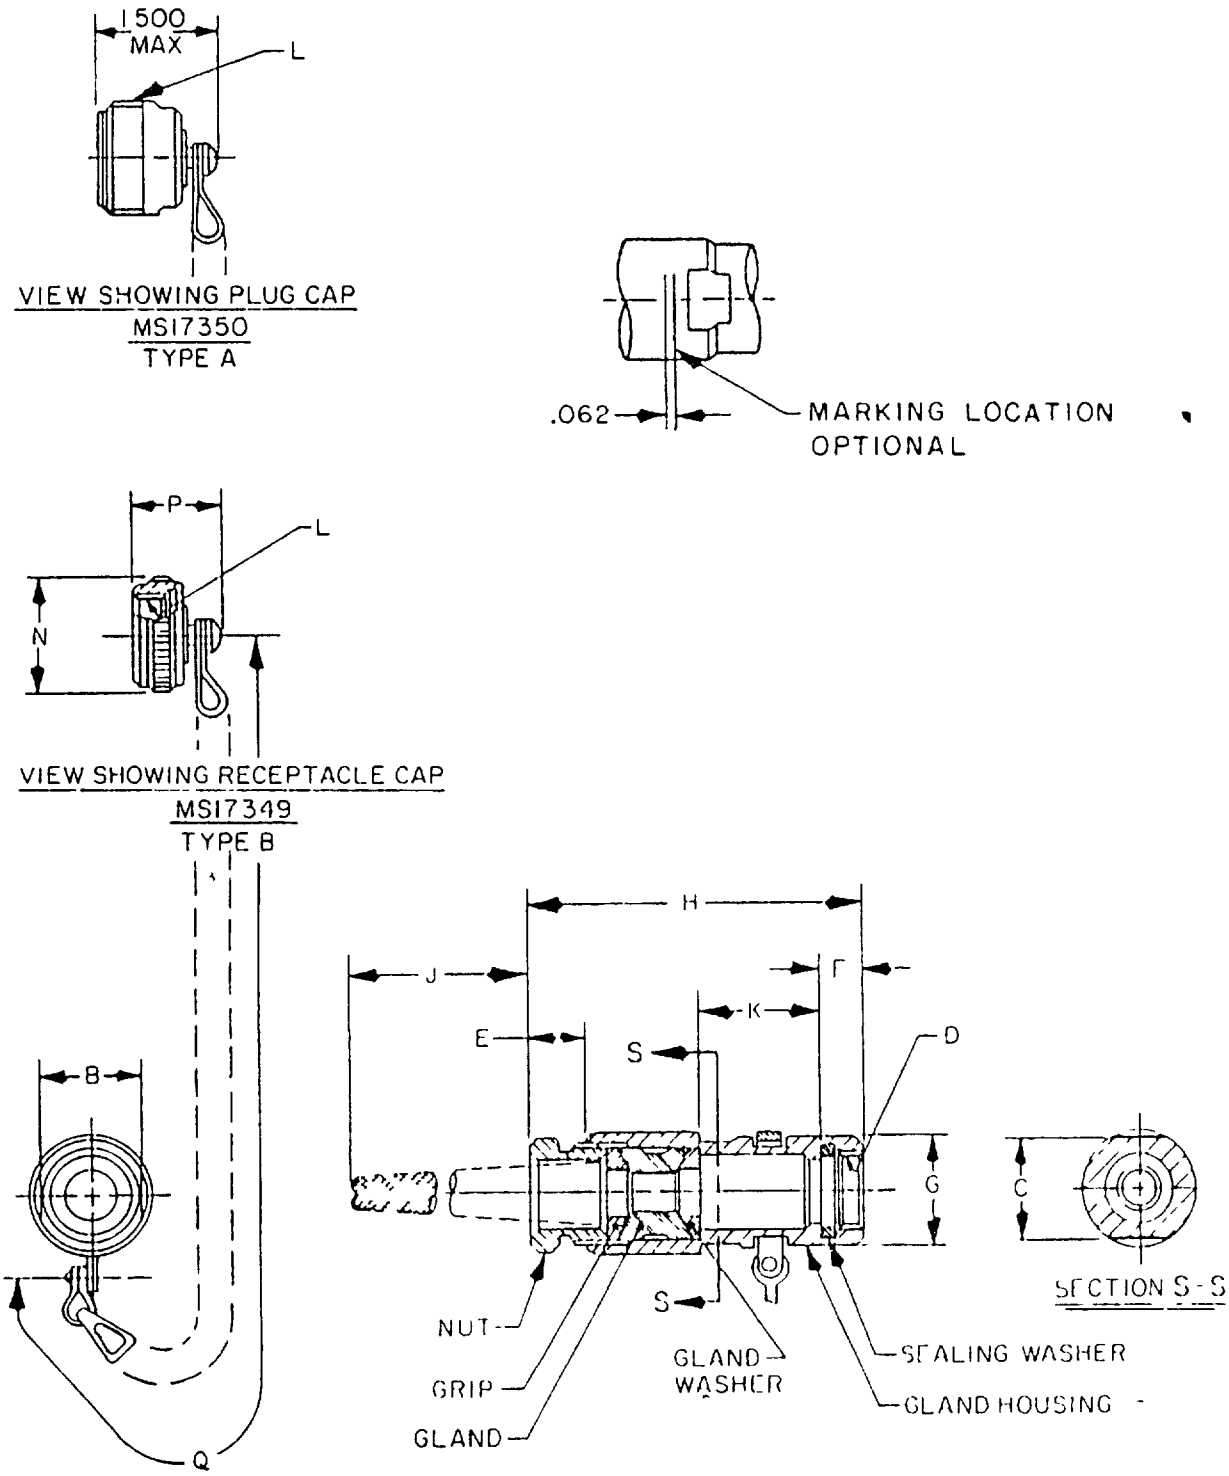

Configuration C Style 3 cable sealing and gripping

FIGURE 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	Approx-free length	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
1	12	530	436	1.000	.812	.7500-20 UNEF	.597	.479	.938	3.810	4.688	1.219	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	12	500	406	.875	.938	.7500-20 UNEF	.539	.479	.938	3.248	4.344	.871	.8750-0.1P-0.2L-DS	1.094	.765	5.00
3	12	.405	.316	1.000	.812	.7500-20 UNEF	.597	.479	.938	3.810	3.688	1.219	.8750-0.1P-0.2L-DS	1.094	.765	5.00
4	14	.625	.560	1.062	1.125	.8750-20 UNEF	.597	.479	1.062	4.024	6.188	1.371	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
5	14	.605	.511	1.000	1.062	.8750-20 UNEF	.597	.479	1.062	3.712	5.188	1.121	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
6	14	.530	.430	1.000	1.062	.8750-20 UNEF	.597	.479	1.062	3.712	4.688	1.121	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
7	14	.405	.316	1.000	1.062	.8750-20 UNEF	.597	.479	1.062	3.712	3.688	1.121	1.0000-0.1P-0.2L-DS	1.219	.765	5.00
8	18	.828	.715	1.125	1.250	1.1250-18 UNEF	.597	.479	1.312	4.087	6.688	1.343	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
9	20	1.055	.930	1.500	1.375	1.2500-18 UNEF	.597	.479	1.438	4.212	7.688	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
10	20	1.000	.875	1.500	1.375	1.2500-18 UNEF	.597	.479	1.438	4.212	7.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
11	20	.900	.787	1.250	1.375	1.2500-18 UNEF	.597	.479	1.438	4.150	7.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
12	20	.750	.637	1.250	1.375	1.2500-18 UNEF	.597	.479	1.438	4.150	7.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00

Configuration C Style 3 cable sealing - Continued.

FIGURE 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	Approx-free length	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
13	22	1.109	.984	1.500	1.625	1 3750-18 UNEF	.597	.479	1.562	4.212	7.688	1.371	1.5000-0 1P-0 2L-DS	1.688	.980	6.00
14	22	1.000	.875	1.500	1.625	1 3750-18 UNEF	.597	.479	1.562	4.212	7.188	1.371	1.5000-0 1P-0 2L-DS	1.688	.980	6.00
15	24	1.375	1.250	2.000	1.875	1 6250-18 UNEF	.597	.479	1.812	4.275	9.688	1.309	1.7500-0 1P-0.2L-DS	1.938	.980	6.00
16	24	1.310	1.185	1.750	1.875	1 6250-18 UNEF	.597	.479	1.812	4.275	8.688	1.372	1.7500-0 1P-0 2L-DS	1.938	.980	6.00
17	24	1.230	1.105	1.750	1.875	1 6250-18 UNEF	.597	.479	1.812	4.275	8.188	1.372	1.7500-0 1P-0.2L-DS	1.938	.980	6.00
18	24	1.180	1.055	1.750	1.875	1 6250-18 UNEF	.597	.479	1.812	4.275	8.188	1.372	1.7500-0 1P-0 2L-DS	1.938	.980	6.00
19	28	1.531	1.406	2.000	2.062	1 8750-16 UN	.597	.479	2.062	4.337	10.688	1.371	2.0000-0.1P-0 2L-DS	2.219	.980	6.00
20	28	1.445	1.320	2.000	2.062	1 8750-16 UN	.597	.479	2.062	4.337	9.688	1.371	2.0000-0 1P-0 2L-DS	2.219	.980	6.00
21	28	1.375	1.250	2.000	2.062	1 8750-16 UN	.597	.479	2.062	4.337	9.688	1.371	2.0000-0 1P-0 2L-DS	2.219	.980	6.00
22	32	1.825	1.700	2.438	2.312	2.0625-16 UNS	.710	.479	2.312	4.704	13.688	1.371	2.2500-0 1P-0 2L-DS	2.469	.980	6.00
23	32	1.730	1.605	2.438	2.312	2.0625-16 UNS	.710	.479	2.312	4.704	13.688	1.371	2.2500-0 1P-0 2L-DS	2.469	.980	6.00

Configuration C Style 3 cable sealing and gripping - Continued

FIGURE 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 4B-LH	Free length max	+.016	Dia +.010 -.020	Max	Approx-free length	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
24	32	1.656	1.531	2.250	2.312	2.0625-16 UNS	.597	.479	2.312	4.399	12.688	1.370	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
25	36	2.062	1.917	2.750	2.500	2.3125-16 UNS	.710	.479	2.562	4.704	14.188	1.375	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
26	36	1.984	1.859	2.438	2.500	2.3125-16 UNS	.710	.479	2.562	4.673	13.688	1.344	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
27	36	1.900	1.775	2.438	2.500	2.3125-16 UNS	.710	.479	2.562	4.673	13.688	1.344	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
28	36	1.825	1.700	2.438	2.500	2.3125-16 UNS	.710	.479	2.562	4.673	13.688	1.344	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
29	36	1.730	1.605	2.438	2.500	2.3125-16 UNS	.710	.479	2.562	4.673	13.688	1.344	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
30	40	2.375	2.230	2.875	2.812	2.6250-16 UN	.709	.667	2.875	5.000	18.188	1.421	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
31	40	2.250	2.105	2.750	2.625	2.6250-16 UN	.709	.667	2.875	5.000	17.188	1.421	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
32	40	2.145	2.000	2.750	2.625	2.6250-16 UN	.710	.667	2.875	4.939	14.188	1.422	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
33	40	2.062	1.917	2.750	2.625	2.6250-16 UN	.710	.667	2.875	4.939	14.188	1.422	2.7500-0.1P-0.2L-DS	2.969	.980	6.00

Configuration C Style 3 cable sealing and gripping - Continued

FIGURE 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
005	0.13	938	23 83	1.430	36 32	2 150	54 61	4 100	104 14
010	0 25	.950	24.13	1 437	36 50	2 183	55 45	4 150	105 41
015	0.38	969	24 61	1 4375	36 513	2 190	55 63	4 177	106.10
.016	0 41	970	24 64	1 438	36 53	2 200	55 88	4 212	106 98
020	0 51	.980	24 89	1.445	36 70	2 218	56 34	4 275	108 59
025	0.64	984	24 99	1 446	36 73	2 219	56.36	4 337	110 16
031	0.79	1 000	25 40	1 450	36.83	2 230	56 64	4 344	110 34
062	1.57	1 0000	25 400	1 469	37.31	2.250	57 15	4 399	111 73
311	7.90	1 015	25 78	1.470	37 34	2 2500	57 150	4.584	116 43
.316	8.03	1.030	26 16	1.500	38 10	2 312	58 72	4 647	118 03
321	8 15	1 055	26 80	1 5000	38 100	2 3125	58 738	4 673	118 69
405	10.29	1 062	26 97	1.531	38 89	2 328	59 13	4 688	119 08
.406	10 31	1 0625	26 988	1 546	39 27	2 375	60 33	4 704	119 48
.430	10 92	1 075	27.31	1 562	39 67	2 400	60 96	4 800	121 92
436	11.07	1.095	27 81	1 5625	39 688	2 438	61 93	4 896	124 35
446	11 33	1.105	28.07	1.600	40 64	2 460	62 48	4 900	124 46
479	12 17	1 109	28 17	1.605	40 77	2 469	62 71	4 939	125 48
.500	12.70	1.121	28 47	1 625	41.28	2 475	62 87	4.959	125 95
.511	12.98	1.125	28.58	1 6250	41.275	2 500	63 50	5 000	127 00
.521	13.23	1 1250	28 575	1.656	42 06	2.5000	63 500	5 021	127 53
530	13.46	1.180	29 97	1 660	42 16	2.562	65 07	5 083	129.10
.531	13 49	1.185	30 10	1 670	42 42	2.625	66 68	5.188	131 77
.539	13 69	1.1875	30.163	1 688	42 88	2 6250	66 675	5 300	134 62
.560	14.22	1.188	30 18	1.700	43 18	2 715	68 97	5 354	135 99
565	14 40	1.200	30 48	1.713	43.51	2 719	69 06	5 385	136 78
597	15 16	1 219	30 96	1 730	43 94	2.750	69 85	5 600	142 24
600	15 24	1.220	30.99	1 750	44 45	2 7500	69 850	5 620	142 75
605	15.38	1 230	31.24	1 7500	44 450	2 812	71.42	5 682	144 32
625	15 88	1 250	31.75	1 775	45 09	2 875	73 03	5 725	145 41
637	16 18	1 2500	31 750	1 780	45 21	2 8750	73 025	6 471	164 36
646	16.41	1.281	32 54	1 812	46 02	2 900	73 66	6 668	169 37
667	16 94	1 304	33 25	1 8125	46 038	2 953	75 01	7 188	182 58
690	17 53	1 310	33 27	1.825	46 36	2 969	75 41	7 688	195 28
709	18.01	1 312	33.32	1.828	46 43	3 0000	76 200	8 188	207 98
710	18.03	1 3125	33 34	1 859	47 22	3 125	79 38	8 688	220 68
.715	18 16	1.320	33.53	1.860	47 24	3 1250	79 375	9 688	246 08
726	18 44	1 325	33 65	1.875	47 63	3 171	80 54	10 688	271 48
750	19 05	1 343	34 11	1.8750	47 625	3 217	81 71	12 688	322 28
7500	19.050	1 344	34 14	1 900	48 26	3 248	82 50	13 688	347 68
765	19 43	1 370	34 80	1 917	48 69	3 250	82 55	14 188	360 38
787	19 99	1 371	34 82	1.938	49 23	3.375	85 73	17 188	436 58
.812	20.65	1 372	34 85	1.950	49 53	3 500	88 90	18 188	461 98
015	20 70	1 375	34 93	1 984	50 39	3 531	89 69		
828	21.03	1.3750	34 925	2 000	50 80	3 625	92 08		
845	21.46	1.382	35 10	2 0000	50 800	3 678	93 42		
871	22 12	1 391	35 33	2.062	52 37	3 688	93 68		
875	22 23	1 406	35.71	2.0625	52 39	3 712	94 28		
8750	22 225	1 420	36 07	2.105	53 47	3 810	96 77		
890	22.61	1 421	36.09	2 110	53 59	4 000	101 60		
.900	22.86	1 422	36 19	2 125	53 98	4 024	102 21		
930	23.62	1 425	36.20	2.145	54 48	4 087	103 81		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 016 (0 41 mm)
4. Dimensions apply after plating

FIGURE 1 Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Accessories shall be designated type A and B

Type A is for use with MS17344

Type B is for use with MS17343, MS17345, and MS17347

The backshell, cap and chain is considered the complete accessory to be supplied

Material and finish See table I Connectors and their associated accessories shall be of the same finish

TABLE I Material and finish

Component	Material	Finish
Accessory body and cap	High grade aluminum alloy in accordance with MIL-C-85049	A, W
Chain	Corrosion resistant steel, type II, class 3, trade number 8 of RR-C-271	Passivated
Gasket and gland	Rubber, in accordance with MIL-R-3065	

Part number See example below

For styles 1 and 2

M85049/	4	W	12	A	1

Military designator

Specification sheet

Finish

Size number

Type

Style

For style 3

M85049/	4	W	12	A	3

Military designator

Specification sheet

Finish

Size number

Type

Style

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Simplified assembly instructions shall be packaged with each accessory

Application

These accessories are for use with connectors specified on MS17343, MS17344, MS17345, and MS17347

Styles 1 and 3 are for use with classes R and C.


Style 2 for use with classes R, C, and J.

Qualification

See MIL-C-85049, category 1A.

QPL evaluating activity Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data

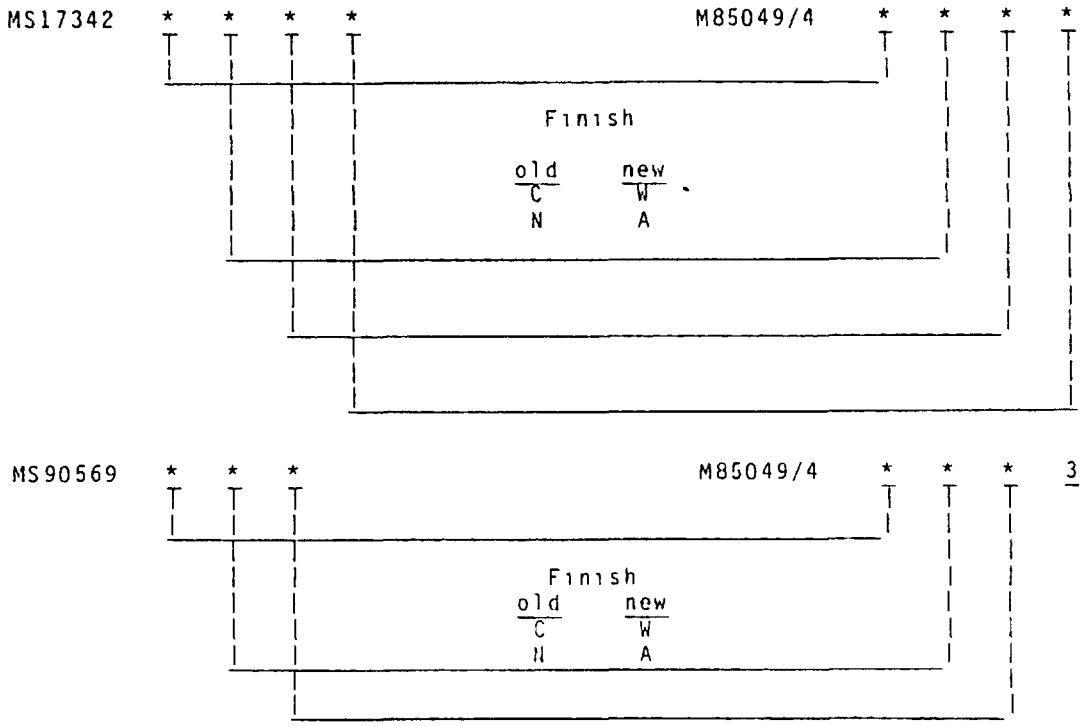

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, MI
(A) Air Force - 11, 99
DLA - ES

(A) Civil agency coordinating activity
NASA - NA

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3658-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.