MIL-F-62201(AT)
8 September 1983
SUPERSEDING
M60PD-F-62201(AT)
2 May 1975

MILITARY SPECIFICATION
FILTER ASSEMBLY

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an electromagnetic interference (EMI) filter assembly which provides high and low frequency filtration in the electro-hydraulic stabilization system of the M60A1 tank.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS
MILITARY

MIL-S-45743	- Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Command, ATTN: DRSTA-GSS, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

STANDARDS
MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-202	- Test Methods of Electronic and Electrical Component Parts.
MIL-STD-220	- Method of Insertion - Loss Measurement.
MIL-STD-454	- Standard General Requirements for Electronic Equipment.
MIL-STD-810	- Environmental Test Methods.

2.1.2 Other Government documents, and Government drawings, and publications. The following documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS
ARMY

11674230	- Filter Assembly.

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity, or as directed by the contracting officer.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, (see 6.2), the contractor shall furnish filters which shall be subjected to first article inspection. (see 4.4 and 6.3). First article inspection samples, properly marked with identifying information, shall be representative of the units to be furnished to the Government. All subsequent filters delivered to the Government shall conform to these samples in all of their pertinent physical and performance characteristecs. Any deviation from approved sample shall be subject to approval of the Government.

3.2 Materials. Materials shall be as specified herein and in referenced specifications, standards and drawings. Material shall be free of defects which adversely affect performance or serviceability of finished product (see 6.4).

3.3 Construction. Filters shall conform to Drawing 11674230 and applicable component drawings and Military standards.

3.3.1 Weight. The weight of the assembly shall not be more than 6 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.3.2 Soldering. Electrical connections shall be soldered per MIL-S-45743. A certification of compliance shall be provided.

3.4 Performance. The connector designations shown on the schematic diagram of Drawing 11674230 shall apply to the performance requirements of 3.4.1 through 3.4.4).

3.4.1 Circuit resistance. Circuit direct current (dc) resistance of the assembly shall conform with requirements shown in table I (see 4.6.1).

3.4.2 Insulation resistance. With voltage of 50 ± 5 volts direct current (vdc) applied, insulation resistance between each pin of connector P1 or J1 and between pins and enclosure shall be not less than 10 megohms. This requirement does not apply to pin P (see 4.6.2).

3.4.3 Low frequency filter. Input capacitance between pin P of connector P1 or J1 and assembly case shall be 2460 (+1800, -250) microfarads at a frequency of 120 ± 5 Hertz (Hz). With a positive voltage of 75 (+0, -5) vdc applied to pin P, dc leakage shall not exceed 366 microamperes (A) over a temperature range of -25°F to +77°F, and dc leakage shall not exceed 2.20 milliamps (ma) for temperatures greater than +77°F to +125°F (see 4.6.3).

3.4.4 High frequency filter. Each circuit through the filter shall provide attenuation as specified in table II (see 4.6.4).

TABLE I. Circuit resistance.

Test No.	Connector J1 From Pin	Connecter P1 To Pin	Ohms Minimum (Min.)	Ohms Maximum (Max.)	Max. Current Amperes
1	A	A	0.0	0.2	8.0
2	B	B	0.0	0.2	8.0
3	C	C	0.0	0.2	8.0
4	D	D	0.0	0.2	8.0
5	E	E	0.0	0.2	8.0
6	F	F	0.0	0.2	8.0
7	G	G	0.0	0.2	2.0
8	H	H	0.0	0.2	2.0
9	J	J	0.0	0.2	8.0
10	K	K	0.0	0.2	8.0
11	L	L	0.0	0.2	2.0
12	M	M	0.0	0.2	8.0
13	N	N	0.0	0.2	8.0
14	P	P	0.0	0.2	15.0
15	R	R	0.0	0.2	2.0
16	S	S	0.0	0.2	8.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE II. High frequency filter attenuation.

Frequency, megahertz (mHz)	Attenuation Decibel (db) minimum at Zo=50 ohms
20	38
40	48
50	50
100	50
200	50

3.4.5 Environmental conditions.

3.4.5.1 Temperature. The assembly shall meet the performance requirements specified herein at ambient air temperatures ranging from -25 to +125 degrees Fahrenheit (^{o}F). Assembly shall not be damaged by storage conditions ranging from -65 to +160°F (see 4.6.5.1 and 4.6.5.2).

3.4.5.2 Vibration. The assembly shall be capable of withstanding vibration profile of figure 1 for a period of 80 minutes (including up to 4 resonance dwells of 13-1/3 minutes each) in each of 3 mutually perpendicular axes (see 4.6.5.3).

3.4.5.3 Shock.

3.4.5.3.1 Basic intensity. The assembly shall be capable of withstanding exposure to three half sine wave shock pulses of 50 $\pm$ 5 gravity unit (g) for a duration of 18 $\pm$ 3 milliseconds (ms) applied in both directions along three mutually perpendicular axes (see 4.6.5.4.1).

3.4.5.3.2 High intensity. The assembly shall be capable of withstanding three half sine wave shock pulses of 125 $\pm$ 12.5g for a duration of 0.6 $\pm$ 0.2 ms along axes specified herein (see 4.6.5.4.2).

3.4.5.4 Humidity. The assembly shall meet the requirements specified herein during and after exposure to conditions of up to 99 percent relative humidity (see 4.6.5.5).

3.4.5.5 Waterproofness The assembly shall be capable of withstanding a differential pressure of 6 pounds square inch (psi) without leakage with the mating electrical connectors or equivalents installed (see 4.6.5.6).

3.5 Protective finish. Final protective finish shall be as specified on drawing 11674230.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

3.6 Identification and marking. The assembly shall be identified by number in accordance with MIL-STD-130 and shall include at least the following:

a) Military part number.
b) Manufacturer's name or trademark
c) Manufacturer's serial number.
d) Name of part.

3.7 Workmanship. Workmanship shall be in accordance with MIL-STD-454, requirement 9.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection equipment. Unless otherwise specified in the contract, (see 6.2) the supplier is responsible for the provision and maintenance of all inspection and test equipment necessary to assure that supplies and services conform to contract requirements. Commercial, modified commercial, or supplier designated inspection equipment or measuring set ups must be capable of repetitive measurements to an accuracy of 10 percent of the component tolerance.

4.1.2 Materials. Contractor's inspection records shall be examined to determine contractor conformance to 3.2.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).
c. Acceptance tests (see 4.5.3).
d. Control tests (see 4.5.4).

4.3 Test conditions. 1/ Unless otherwise specified, (see 6.2) all tests shall be conducted under the following conditions:

Temperature	73 $\pm$ 18°F
Humidity (relative)	50 $\pm$ 30 percent
Pressure	28.5(+2.0, -4.5) inches of mercury
Loads	Maximum current per table I

1/ Prior to the performance tests of 4.6.1 to 4.6.4, perform the waterproofness test of 4.6.5.6 and the vibration run-in and thermal run-in tests of 4.7a and 4.7b.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. first article inspections are categorized as preproduction inspection (see 4.4.1) and initial production inspection (see 4.4.2). Approval of the first article sample by the Government shall not relieve the contractor of his obligation to supply filters that are fully representative of those inspected as a first article sample. Any changes or deviation of the production units from the first article sample shall be subject to the approval of the contracting officer.

4.4.1 Preproduction inspection. When specified (see 6.2) the preproduction sample shall consist of two filters. Inspection shall consist of examination as specified in 4.5.2 and att tests specified in table IV.

4.4.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select two filters from the first ten filters produced under the production contract for initial production inspection. Filters shall be examined as specified in 4.5.2 and tested as specified in table IV.

4.4.3 First article inspection failure. Failure of any first article sample to pass specified examinations or tests shall be cause for refusal to grant first article approval until corrective action by the contractor has been approved by the Government.

4.5 Quality conformance inspection.

4.5.1 Sampling.

4.5.1.1 Lot formation. A lot shall consist of all assemblies from an identifiable production period, from one manufacturer, submitted at one time for acceptance.

4.5.1.2 Sampling for examination. Samples for quality conformance shall be selected in accordance with MIL-STD-105. Before sampling may be initiated, the contractor shall 100 percent inspect a minimum of 20 assemblies to establish a process average (see 6.4), to enable normal sampling in accordance with MIL-STD-105.

4.5.1.3 Sampling for acceptance testing. Each assembly from each lot (see 4.5.1.1) shall undergo acceptance tests.

4.5.2 Examinations. The assemblies shall be examined for conformance to applicable drawings and this specification. Examinations shall be performed against the classification of defects and with the acceptable quality levels (AQLs) specified in 4.5.2.1 and table III.

4.5.2.1 Acceptable quality level. Each sample selected in accordance with 4.5.1.2 shall be examined for conformance to the following AQLs, on the basis of percent defective:

Classification	AQL
Major	2.5
Minor	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.5.2.2 Classification of defects. For examination purposes, defects shall be classified as specified in table III.

TABLE III. Classification of defects.

Category	Defect	Method of inspection
Major:		
101	Dimensions affecting interchangeability, not within tolerance (see 3.7).	SIE 1/
102	Improper weight (see 3.3.1).	SIE
103	Solder application (see 3.4.2)	Visual
104	Protective finish application (see 3.6)	Visual
105	Improper marking (see 3.6)	Visual
106	Improper workmanship affecting interchangeability (see 3.7).	Visual
Minor:		
201	Dimensions not affecting interchangeability not within tolerance (see 3.3).	SIE
202	Improper workmanship affecting appearance (see 3.7).	Visual

1/ SIE = Standard Inspection Equipment.

4.5.3 Acceptance tests. (see 4.7a and b).

4.5.3.1 Examination samples. Samples selected as specified in 4.5.1.2 shall be examined as specified in 4.5.2.

4.5.3.2 Test procedure. Each assembly selected in accordance with 4.5.1.3 shall be subjected to all acceptance tests specified in table IV.

4.5.3.3 Failure. Any assembly that fails to pass any acceptance test, or exhibits defects in excess of AQL specified, shall be rejected. Rejected units may be reworked or repaired and resubmitted for acceptance testing.

4.5.4 Control tests. Assemblies for control tests shall be selected in accordance with 4.5.4.1 or 4.5.4.1.1, as applicable, and subjected to tests specified in table IV.

4.5.4.1 Frequency (1/50). One assembly shall be selected from each lot of 50 assemblies consecutively produced except that not more than one assembly shall be selected in a one (1) month period, nor less than one test in a three (3) month period.

4.5.4.1.1 Frequency (1/200). One assembly shall be selected from each lot, consecutively produced, except that not more than one shall be selected in a two (2) month period, nor less than one test in a six (6) month period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of tests.

Title	Requirements	First article/ initial production tests	Acceptance tests 100%	Control tests 1/50	Control tests 1/200
Circuit resistance	3.4.1	4.6.1	4.6.1		
Insulation resistance	3.4.2	4.6.2	4.6.2		
Low frequency filter	3.4.3	4.6.3	4.6.3		
High frequency filter	3.4.4	4.6.4	4.6.4		
High temperature	3.4.5.1	4.6.5.1		4.6.5.1	
Low temperature	3.4.5.1	4.6.5.2		4.6.5.2	
Vibration	3.4.5.2	4.6.5.3		4.6.5.3.1	
Shock-basic intensity	3.4.5.3.1	4.6.5.4.1		4.6.5.4.1.1	
Shock-high intensity	3.4.5.3.2	4.6.5.4.2		4.6.5.4.2.1	
Humidity	3.4.5.4	4.6.5.5			4.6.5.5
Waterproofness	3.4.5.5	4.6.5.6	4.6.5.6		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.5.4.1.2 Test failure (all frequencies). Failure of the assembly to meet the specified control tests shall be considered cause for rejection of production quantity represented. When cause for failure is determined, necessary corrections shall be made and proven by testing three randomly selected assemblies from that production quantity. One of three assemblies shall be subjected to all specified tests. Control test verification for the two remaining assemblies shall be limited to parameters directly related to failure cause and parameters affected by corrective action taken.

4.6 Methods of inspection.

4.6.1 Circuit resistance. To determine conformance to 3.4.1, apply specified maximum test current to the specified pins indicated in table I. Measure voltage drop across each set of pins and calculate resistance and verify that it conforms to table I.

4.6.2 Insulation resistance. To determine conformance to 3.4.2, with a voltage of 50 ± 5 vdc applied, measure insulation resistance between pins (except P) of connector P1 or J1, and between pins (except P) and case in accordance with MIL-STD-202, method 302. Verify that the resistance is not less than 10 megohms.

4.6.3 Low frequency filter. To determine conformance to 3.4.3, measure capacitance between pin P of connector P1 or J1 and the assembly case in accordance with MIL-STD-202, method 305; the dc bias voltage shall be 2.0 ± 0.2 vdc and alternating current (ac) voltage shall be limited to 1.0 volts root mean square (vrms) at a frequency of 120 ± 5 Hertz (Hz). Verify that capacitance is between 2210 and 4260 microfarads. Measure dc leakage at 72 ± 5°F with a positive voltage of 75 (+0, -5) vdc applied to pin P and verify that leakage current does not exceed 366 micro A. When dc leakage current is measured during temperature tests of 4.6.5.1 and 4.6.5.2, leakage current shall not exceed 366 micro A at low temperature (-25°F) and shall not exceed 2.20 milli A at high temperature (+125°F).

4.6.4 High frequency filter. To determine conformance to 3.4.4, measure attenuation of each high frequency filter circuit of the assembly in accordance with MIL-STD-220 with the exception that no direct current source be used. During and after this test, verify that the assembly provides specified attenuation at specified frequencies. The characteristic or surge impedance shall be 50 ohms.

4.6.5 Environmental tests.

4.6.5.1 High temperature test. To determine conformance to 3.4.5.1, subject the assembly to the high temperature test specified in MIL-STD-810, method 501, procedure II, except storage temperature of step 4 shall be 160°F. At conclusion of the storage temperature test, stabilize the assembly at 125°F and subject it to performance tests of 4.6.3 and 4.6.4. After testing, return the assembly to room ambient temperature and verify that it passes the performance tests of 4.6.1 to 4.6.4.

4.6.5.2 Low temperature. To determine conformance to 3.4.5.1, subject the assembly to the low temperature test specified in MIL-STD-810, method 502, procedure I. Maintain temperature at -65°F for a period of not less

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

than 12 hours. At conclusion of the storage temperature test, stabilize the assembly at -25°F and subject it to performance tests of 4.6.3 and 4.6.4. After testing, return the assembly to room ambient temperature and verify that it passes the performance tests of 4.6.1 to 4.6.4.

4.6.5.3 Vibration test. To determine conformance to 3.4.5.2, subject the assembly to the vibration test specified in MIL-STD-810, method 514, procedure VIII, except the vibration level shall be as shown in figure 1. Sweep time shall be 16 minutes per cycle and total cycling time per axis shall be 80 minutes in each of three mutually perpendicular axes. Resonance search shall be conducted at room temperature with the input power supplied. After resonance (if any) has been determined, place the assembly in a 125°F ambient environment and subject it to vibration sweeps with resonance dwell at points (if any) detected. During vibration testing, input power shall be applied and output circuits shall be monitored for discontinuity. At the conclusion of the test, return the assembly to room temperature and verify that it passes the performance tests of 4.6.1. to 4.6.4.

4.6.5.3.1 Control test (vibration). The test shall be the same as 4.6.5.3 except the dwell time at each resonance shall be two minutes and the test shall be conducted at 73 ± 18°F ambient temperature. At conclusion of the test, verify that the assembly passes the performance tests of 4.6.1 to 4.6.4.

4.6.5.4 Shock test.

4.6.5.4.1 Basic intensity. To determine conformance to 3.4.5.3.1, subject the assembly to the shock test specified in MIL-STD-810, method 516, procedure I, for a total of eighteen half-sine wave shock pulses (six in each axis). Peak amplitude shall be 50 ± 5g with a time duration of 18 ± 3 ms measured at 10 percent amplitude points. During the test, apply input power and monitor for intermittent conditions. At the conclusion of the test, subject the assembly to the performance tests of 4.6.1 to 4.6.4.

4.6.5.4.1.1 Control test (basic intensity). The test shall be the same as 4.6.5.4.1 except the shock level shall be limited to 37.5 ± 3.7g. At the conclusion of the test, verify that the assembly passes the performance tests of 4.6.1 to 4.6.4.

4.6.5.4.2 High intensity. To determine conformance to 3.4.5.3.2, subject the assembly to the shock test specified in MIL-STD-810, method 516, procedure IV for a total of eighteen half-sine wave shock pulses. Peak amplitude shall be 125 ± 12.5g with a duration of 0.6 ± 0.2 ms measured at 10 percent amplitude points. No tests are required during the shock pulses. At the conclusion of the test, verify that the assembly passes the performance tests of 4.6.1 to 4.6.4.

4.6.5.4.2.1 Control test (high intensity). The test shall be the same as 4.6.5.4.2 except the shock level shall be limited to 93.7 ± 9.3g. At the conclusion of the test, verify that the assembly passes the performance tests of 4.6.1 to 4.6.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

4.6.5.5 Humidity. To determine conformance to 3.4.5.4, place the assembly in a humidity chamber and subject it to the humidity test specified in MIL-STD-810, method 507, procedure II. During and after the test, verify that the assembly passes the performance tests of 4.6.3 and 4.6.4.

4.6.5.6 Waterproofness. To determine conformance to 3.4.5.5, the assembly shall be capped at all connections, submerged in water, and a pressure differential of 6 psi developed such that the assembly internal air pressure exceeds external pressure. Pressure differential shall be maintained for a two-minute period without evidence of leakage. After exposure, the caps shall be removed and the assembly subjected to the performance tests of 4.6.3 and 4.6.4.

4.7 Workmanship. Perform visual examinations on each item of the inspection lot at all phases of inspection testing to verify conformance to MIL-STD-454, requirement 9. In addition, subject the assembly to a thermal run-in and a vibration run-in as follows:

a. Thermal run-in. Prior to the acceptance tests of 4.6.1 through 4.6.4, with the input power applied, verify that the assembly passes temperature cycling per figure 2 for a total cycling time of 24 hours.

b. Vibration run-in. Prior to the acceptance tests of 4.6.1 through 4.6.4, with the power off, verify that the assembly passes a vibration cycle having the following characteristics:

1.	Acceleration:	1.0 ± 0.1g peak
2.	Logarithmic frequency sweep:	30 ± 1.0 minute duration from 5 to 500 to 5 Hz
3.	Vibration profile:	As specified in figure 3

4.8 Preparation for delivery. The assembly shall be inspected by the supplier prior to shipment to ensure conformance to preservation, packaging, packing and marking requirements in Section 5. Sampling inspections shall be limited to those characteristics that can be determined by visual examination.

5. PACKAGING

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking for the desired level of protection shall be in accordance with the applicable packaging standard or packaging data sheet specified by the contracting authority (see 6.2).

6. NOTES

6.1 Intended use. The EMI filter assembly is intended for use primarily to provide high and low frequency filtration in the electrohydraulic stabilization system of the M60A1 tank.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Whether first article samples shall be furnished (see 3.1).
c. Whether responsibility for inspection equipment shall be other than as specified (see 4.1.1).
d. Whether test conditions shall be other than as specified (see 4.3).
e. Whether preproduction inspection shall be conducted (see 4.4.1).
f. Whether initial production inspection shall not be conducted (see 4.2).
g. Selection of applicable level and packaging standard or packaging data sheet (see 5.1).

6.3 First article. When a first article sample inspection is required, the item will be tested as specified in 4.4. The first article samples shall consist of two units. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for examination, tests and approval of the first article samples (see 3.1).

6.4 Process average. Sampling may be initiated if process average value for the first twenty assemblies inspected is less than AQL specified in 4.5.2.1 for major and minor defects.

$$\text{Process average} = \frac{\text{Number of defects}}{\text{Number of assemblies inspected}} \times 100$$

If computed process average exceeds specified AQL, 100 percent inspection shall be performed and continued until such time that process average for twenty consecutive assemblies is less than the specified AQL.

6.5 Recycled materials. Use of recycled materials which meet the requirements of applicable material specifications without jeopardizing intended use of the item shall be encouraged (see 3.2)

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 5915-A200

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

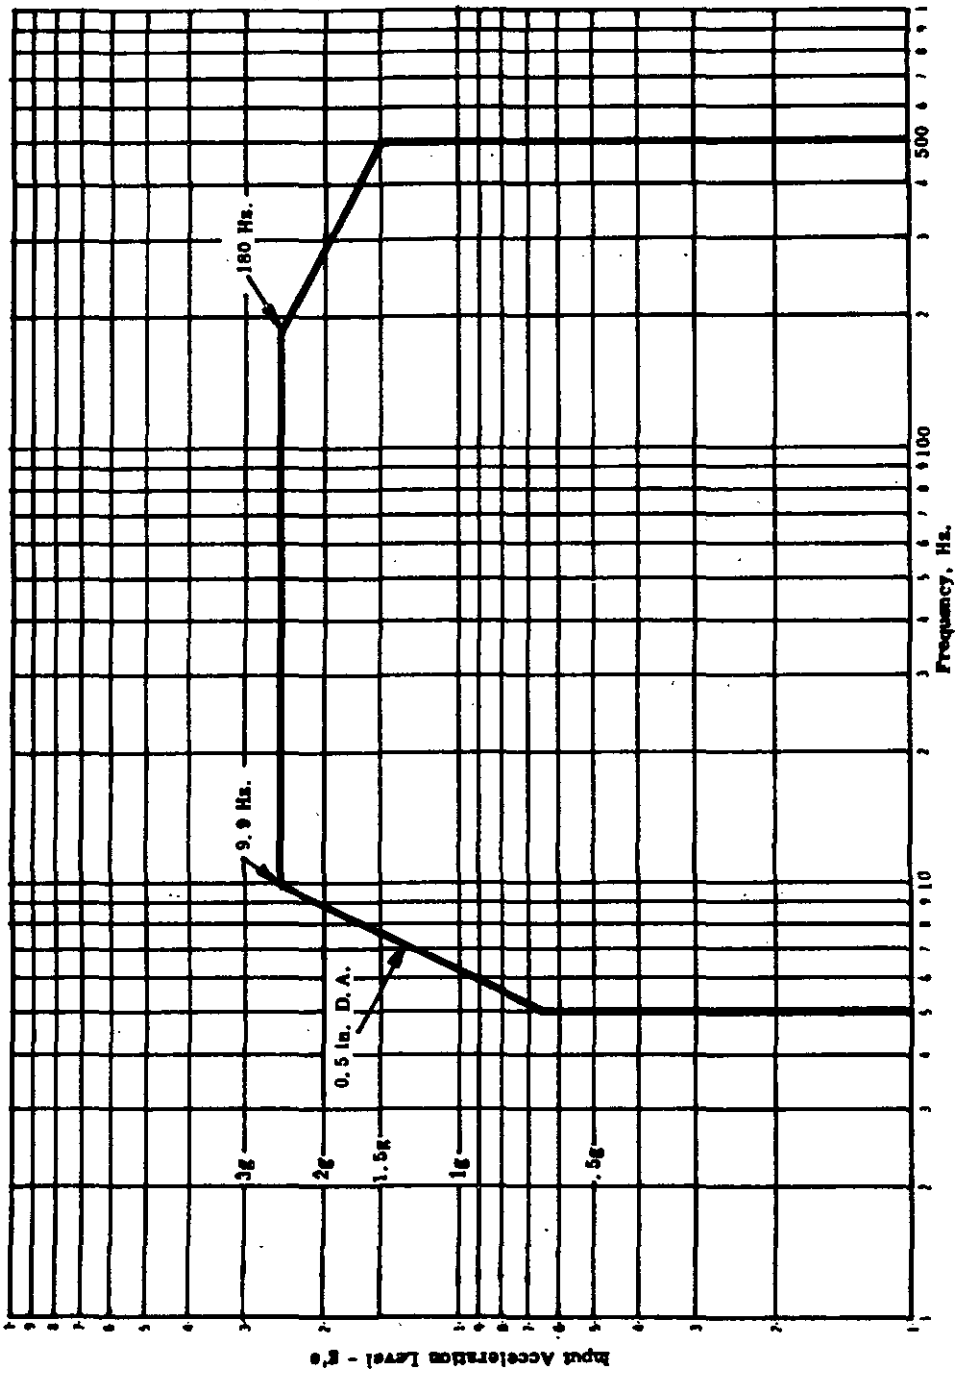


FIGURE 1. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.


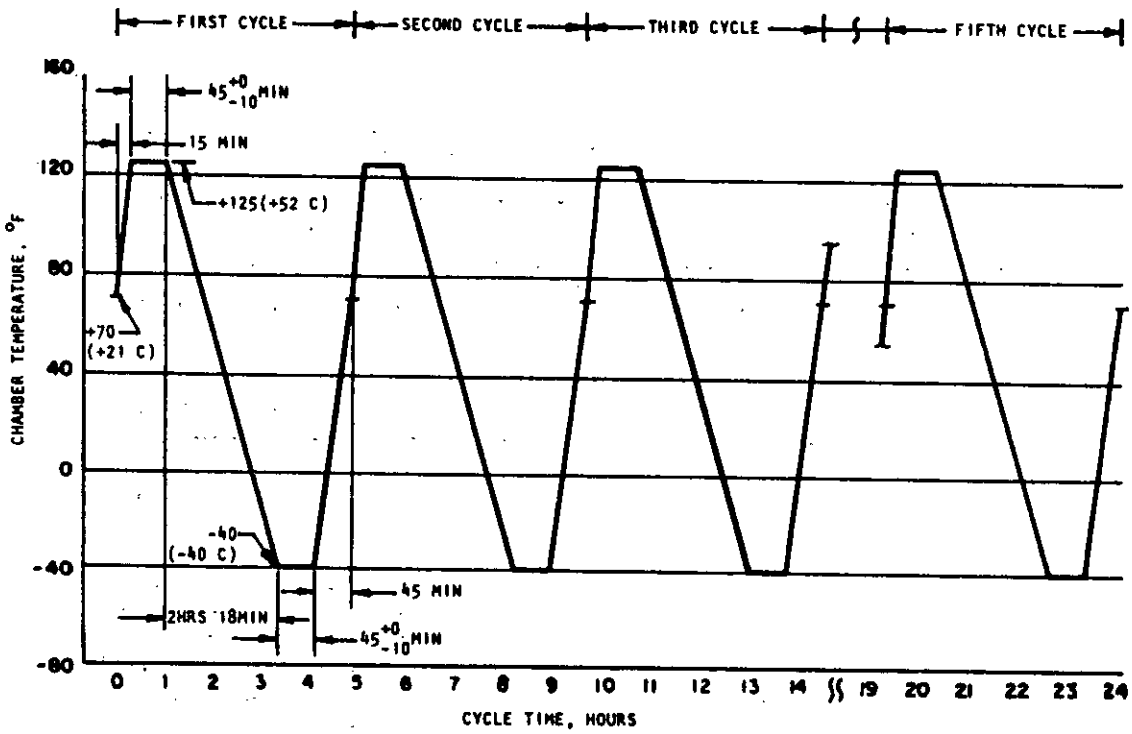


FIGURE 2. Temperature cycling.

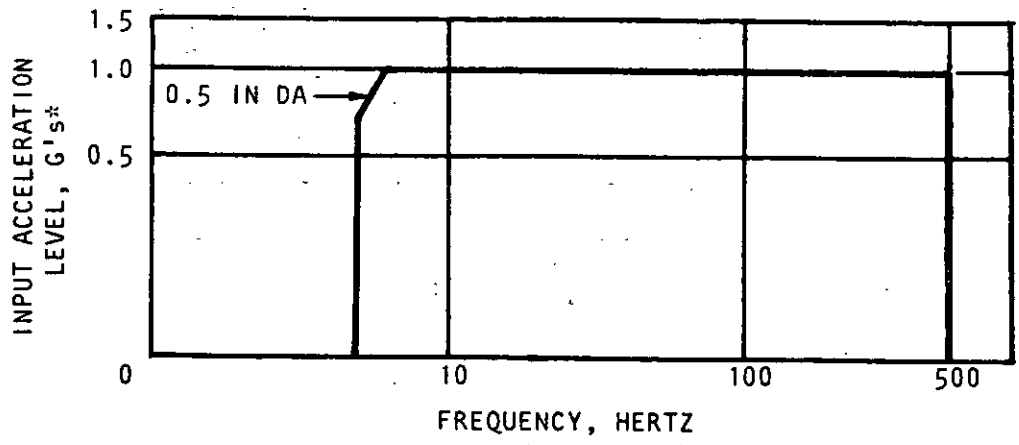

*APPLIED AS AN INPUT TO THE COMPONENT MOUNTING BRACKET

FIGURE 3. Vibration profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-62201(AT)	Filter Assembly

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 62 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: http://www.dodssp.daps.mil 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding General
US Army Tank-Automotive Command
ATTN: DRSTA-GSS
Warren, MI 48090

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:25Z
Check the source to verify that this is the current version before use.