MIL-P-53054A(ME)
INTERIM AMENDMENT 1
11 March 1988

MILITARY SPECIFICATION

PUMPING ASSEMBLY, WATER, WHEEL MOUNTED, DIESEL-ENGINE-DRIVEN,

SELF-PRIMING CENTRIFUGAL, 6-INCH, 600 GPM AT 350 FEET TOTAL HEAD

This amendment forms a part of MIL-P-53054A(ME), dated 11 June 1987, and is approved for use within the USA Belvoir Research, Development, and Engineering Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

2.1.1, under SPECIFICATIONS, MILITARY, delete MIL-A-8421, MIL-E-10062 and MIL-A-46153 in their entirety.

PAGE 3

2.1.1, under STANDARDS, MILITARY, add:

"MIL-STD-1791 - Designing for Internal Aerial Delivery in Fixed Wing Aircraft."

2.1.2, add the following:

"DRAWINGS
ME
13228E9844 - Information Plate, 600 GPM."

PAGE 6

3.5.1, line 3, delete: "Covers and plates" and substitute "Covers, plates and mounting brackets"

PAGE 7

3.5.1, after sentence ending "...for accessibility.", add the following new sentence:

" All drain plugs and filler caps shall be durable metal and shall be attached to the unit with permanent retaining chains or cables which shall not impede removal or replacement of the plugs or caps from their receptacle."

AMSC N/A FSC 4320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

3.9, delete last sentence and substitute the following:

"Special design emphasis shall be given, but not limited to, the following requirements in MIL-STD-1472: labeling, general, application (5.5.1.1); labeling, qualities, brevity (5.5.4.1); design for maintainability, accessibility (5.9.4); lubrication (5.9.5); access openings and covers (5.9.9)."

3.10, delete in its entirety and substitute:

"3.10 Noise limits. The noise produced by the pump assembly shall not exceed MIL-STD-1474, 5.1.1.1, category D [85 dB(A)] at a distance of 2 feet in any horizontal direction from the basic envelope of the unit and at a distance of 18 inches from the control panel."

PAGE 8

3.11.3, add the following new sentence at the end of the paragraph: "The coupling and gasket shall conform to the requirements herein for lines and surfaces that contact potable water (see 3.3)."

PAGE 9

3.12, line 2, delete "liquid- or ".

3.12.j, delete "Value" and substitute "Valve".

3.12.l, delete last sentence.

3.12.m, line 2, after belt, add: "without removal of guard or mounting screws"

After 3.12.n, add the following new line:

"o. A drainage provision for the exhaust assembly."

PAGE 10

3.14, line 3, after "to cover the fourth side", add the following:

"All operator controls shall be protected by the hinged cover when it is closed .The instrument panel shall be hinged to allow access to all instrument connections. All components shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

PAGE 14

3.22, lines 6 and 9, delete "green 383" and substitute "sand 33303"

PAGE 19

4.6.2.8, delete in its entirety and substitute:

"4.6.2.8 Noise level test. Noise levels shall be measured in accordance with MIL-STD-1474, 5.1 requirements and reported in the format indicated by MIL-STD-1474, figure 7. As a minimum: noise levels shall be measured when equipment is operating under full load; noise measurement locations shall be not fewer than 12 points each at a horizontal distance of 2 feet from the basic envelope of the unit. Each point shall be an equal distance from its two adjacent points. Each point shall be a vertical distance of not less than 4 feet and not greater than 6 feet from ground level. One of the readings shall be taken at the noisiest point along the perimeter containing the other points. One additional reading shall be taken at a horizontal distance of 18 inches from the center of the control/instrument panel with the control panel access door open. At each location, readings shall be provided as dB(A) level. Failure to comply with 3.10 shall constitute failure of this test."

PAGE 21

4.8.2.1, delete the last sentence and substitute "The AQL shall be 1.0 percent defective."

Items 150 thru 152, delete in their entirety and substitute:


"150. Pump preservative not as specified (see 5.2.1).
151. Level C packaging not as specified (see 5.2.2).
152. Depreservation guides not as specified (see 5.3).
153. Marking not as specified (see 5.4."

PAGE 22

5.2.1, delete in its entirety and substitute:

"5.2.1 Levels A and B preservation and packing. Preservation and packing for levels A and B shall be in accordance with the applicable provisions for levels A and B of MIL-P-10603 except that type P-14 preservative shall be used in lieu of type P-10 preservative. Alternatively, when specified (see 6.2), the pumping assemblies may be packed in crates or boxes as specified in MIL-P-10603 for units on nonhighway type trailers."

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

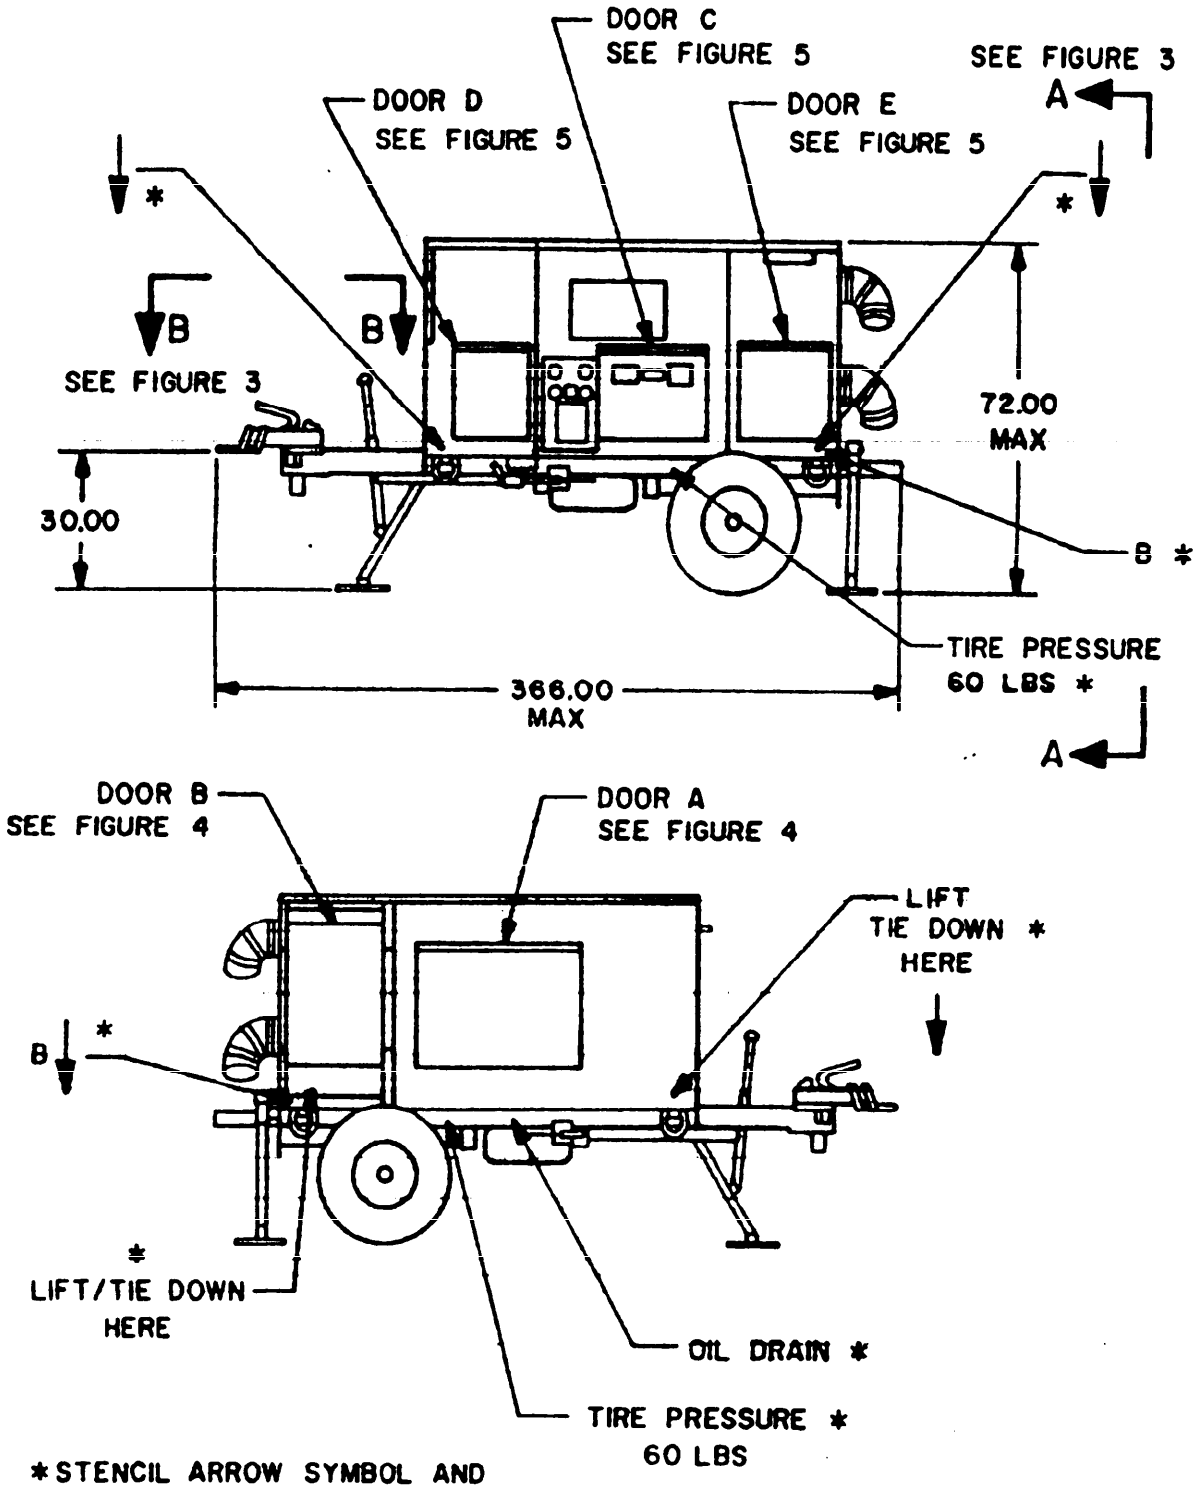


*STENCIL ARROW SYMBOL AND DATA AT APPROXIMATE POSITION SHOWN. SEE FIGURE 4 FOR STENCIL SPECIFICATION.


FIGURE 2. 600 GPM pump.

X-4777

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:55Z
Check the source to verify that this is the current version before use.

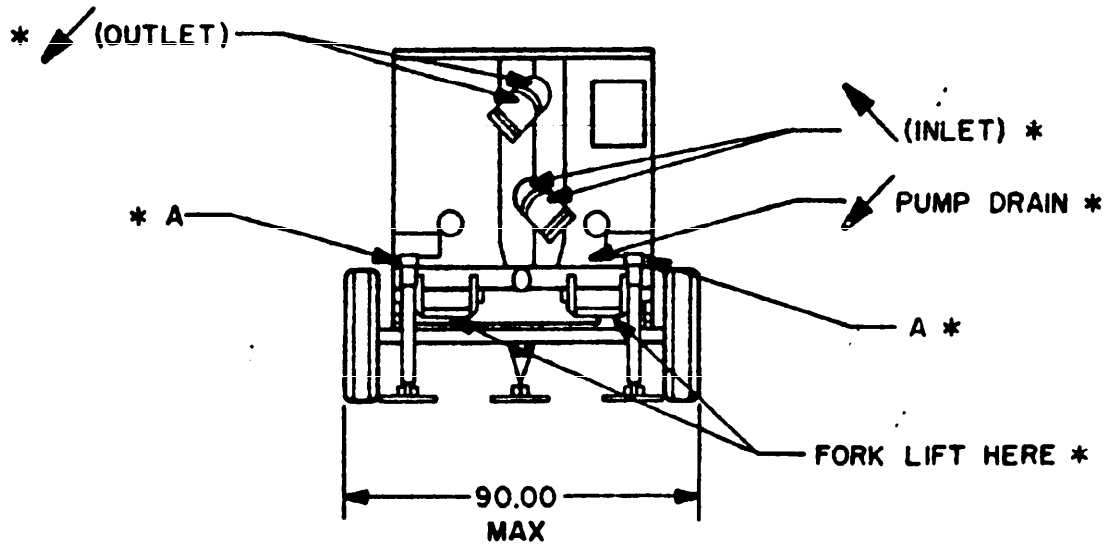

VIEW A-A

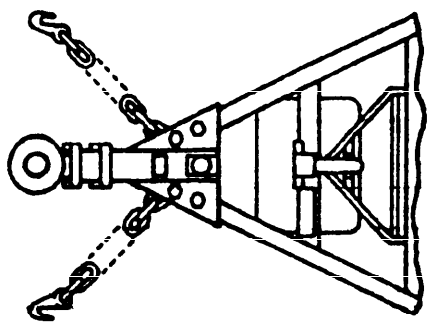

VIEW B-B


* STENCIL ARROW SYMBOL AND DATA AT APPROXIMATE POSITION SHOWN. SEE FIGURE 4 FOR STENCIL SPECIFICATION.

FIGURE 3. 600 GPM pump.


X-4778

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

DOOR A

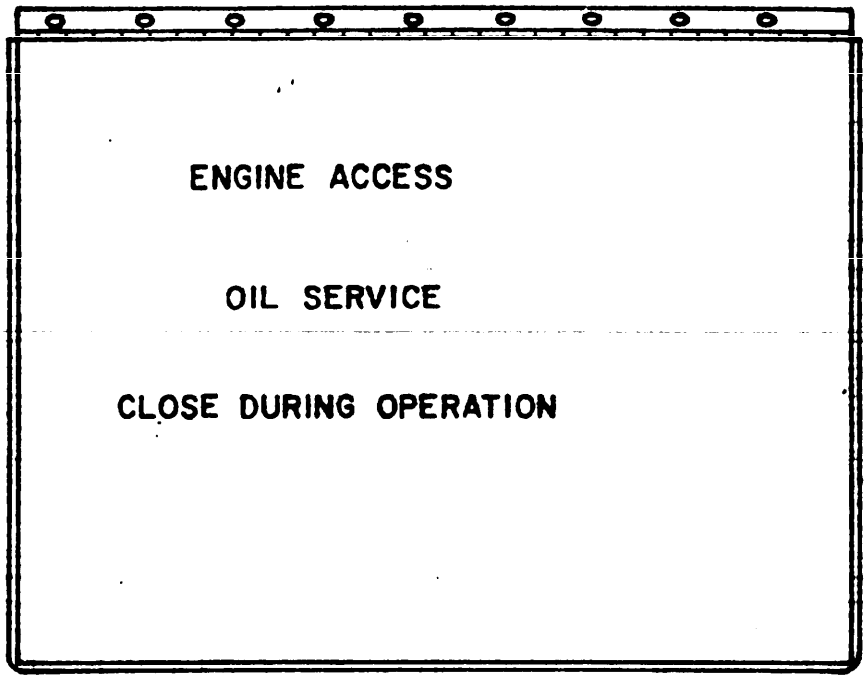

DOOR B

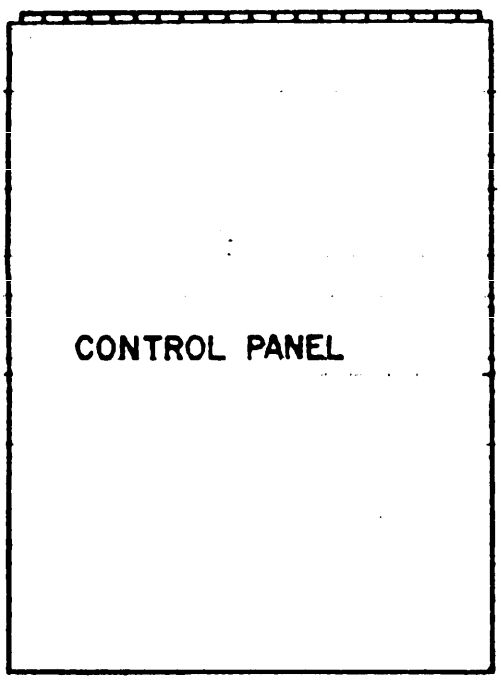

STENCIL SPECIFICATIONS (UNLESS OTHERWISE SHOWN)	(IN INCHES)
LETTER HEIGHT	1.00
* LETTER WIDTH	.670
LETTER SPACING	.200
STROKE WIDTH	.160
WORD SPACING	1.070
LINE SPACING	1.00
* LETTER "I" WIDTH	.160

FIGURE 4. Door panel stenciling.

X-4779

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

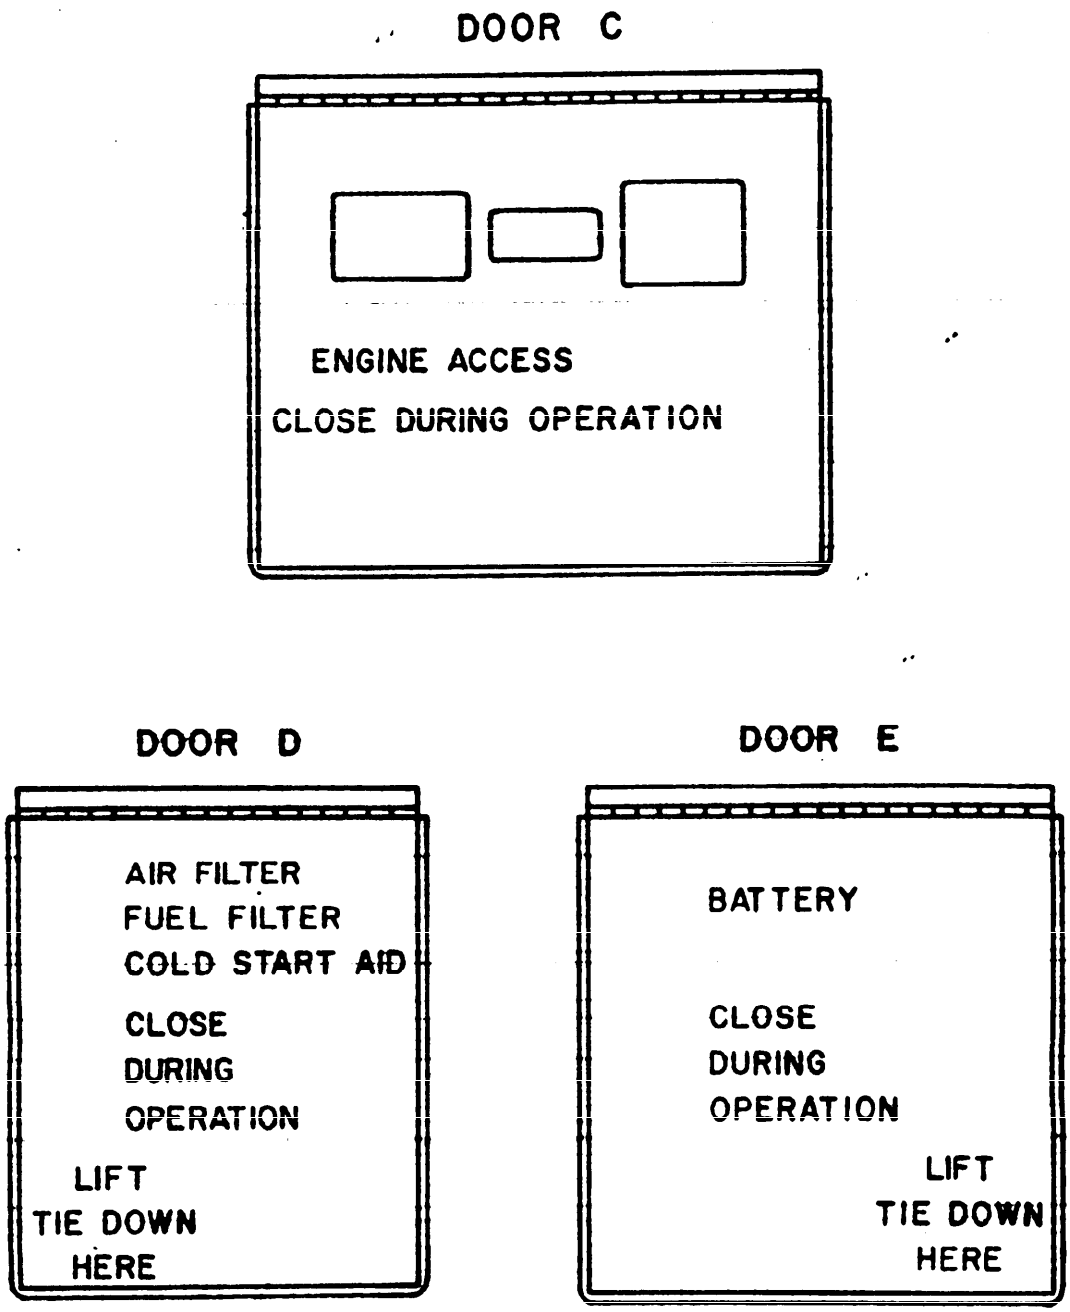


FIGURE 5. Door panel stenciling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

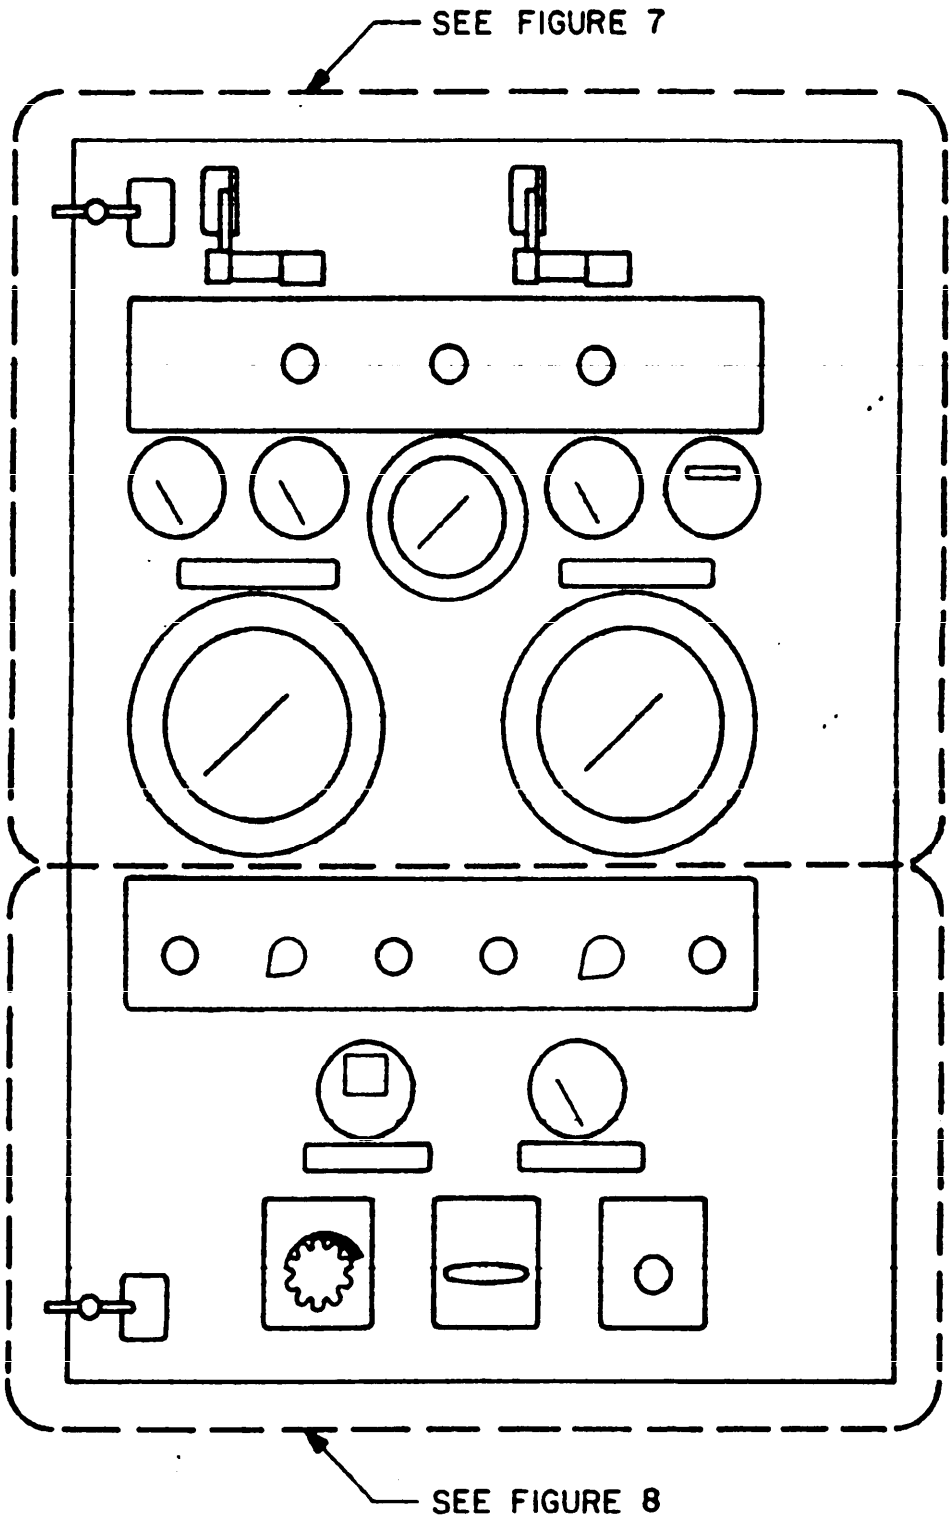


FIGURE 6. Control panel detail.

X-4781

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

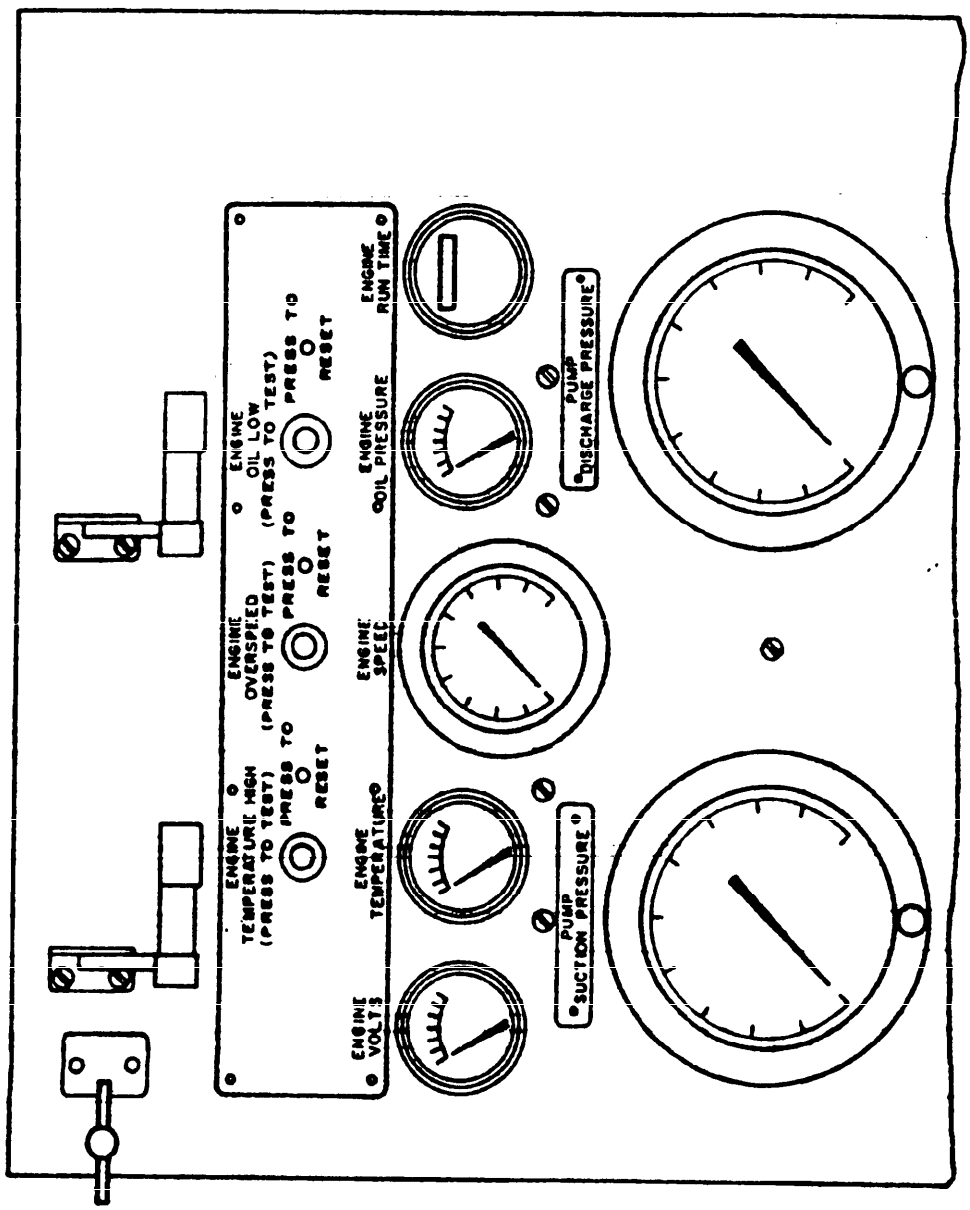


FIGURE 7. Control panel detail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:55Z
Check the source to verify that this is the current version before use.

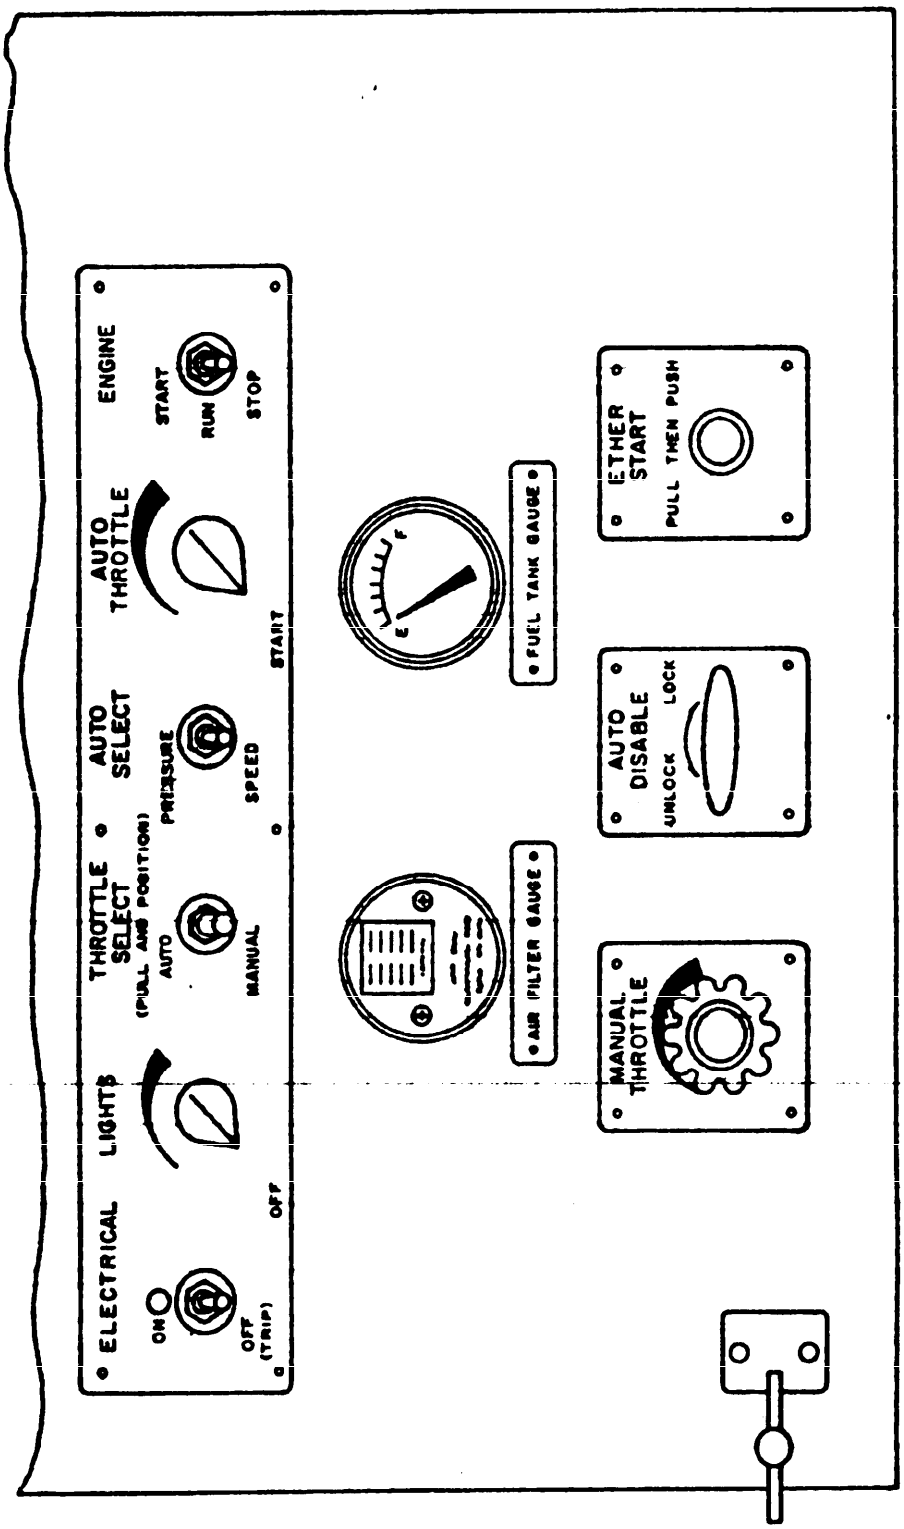


FIGURE 8. Control panel detail.

X-4783

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:55Z
Check the source to verify that this is the current version before use.