MILITARY STANDARD

MIL-STD 1365 (NAVY)


9 MARCH 1976

RAILCAR LOADING OF HAZARDOUS MATERIALS

ADAPTION KIT MK 28 MOD 1
IN CONTAINER MK 182 MOD 1

CONTAINER DATA

CONTAINER DRAWING . . . . . SD [illegible]
WEIGHT . . . . . [illegible]
DIMENSIONS . . . . . [illegible]
USE . . . . . [illegible]
DOT HAZARD CLASSIFICATIONS . . . . . [illegible]

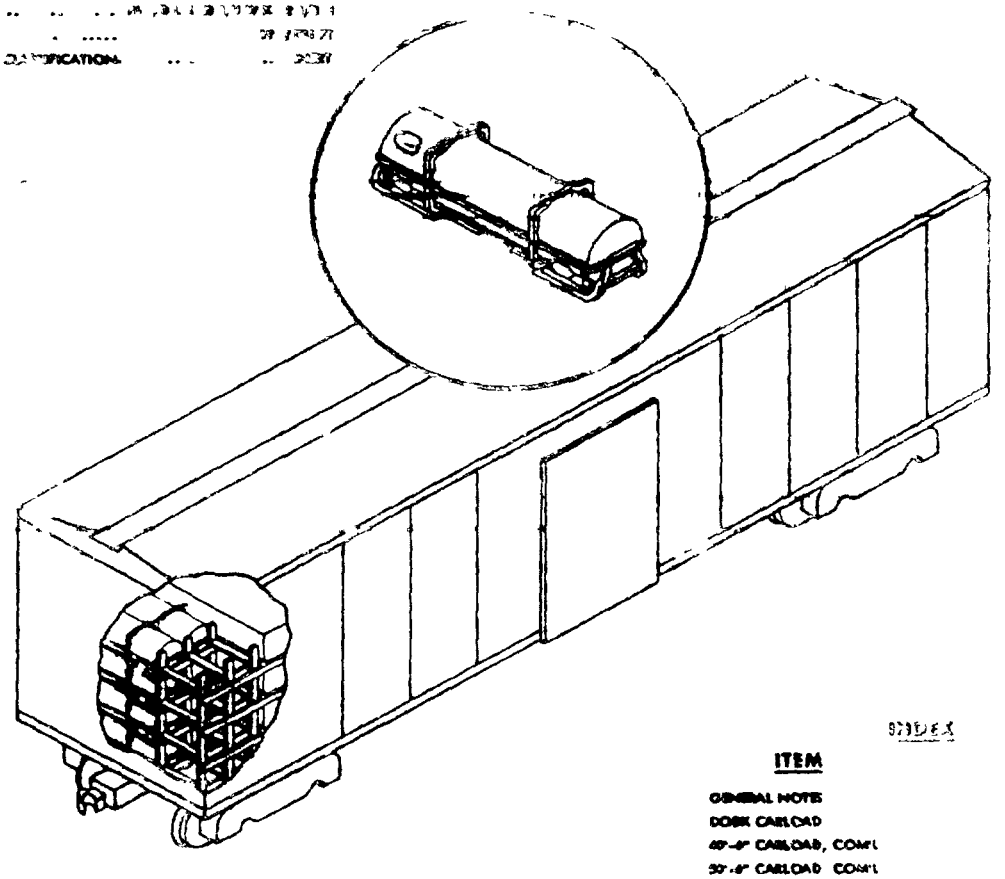

INDEX

ITEM	PAGE
GENERAL NOTES	3
DOOR CARLOAD	2 [illegible]
40'-6" CARLOAD, CONT.	1 5 6
50'-6" CARLOAD CONT.	8 9 10
STACKING & STRAPPING	11

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCK-LOADING AND CONTAINERLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-138 (NAVY)

FSC 3930

AUTHORIZED AND RELEASED FOR GENERAL USE.

[illegible] 3/16/76
NAVAL [illegible] DATE
[illegible] 3/16/76
[illegible] NAVAL [illegible] STATION

APPROVED BY BUREAU OF EXPLOSIVES NOT APPLICABLE

NAME [illegible]
ORIGINATOR [illegible] 3/17/76
SIGNATURE
NAVAL [illegible] LABORATORY
[illegible] NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. FOR GENERAL [illegible] SEE [illegible], INSTALLING, AND REMOVING LOAD, AND FOR DUNNAGING MATERIALS, DESIGN, AND INSTALLATION OF DUNNAGE SEE THE GENERAL ROCUREMENT [illegible] "BOXCAR LOADING OF HAZARDOUS MATERIALS"
2. WHEN PLANNING SHIPMENTS CHECK THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT UTILITY LOADER CARS SHALL BE SERIES DODX 29000
3. LOADING PLANS ENCOURAGE FOR DODX UTILITY LOADER CAR WITH 50 FT 6 INCHES INSIDE LENGTH, 9'8" 5/16 INCHES INSIDE WIDTH BETWEEN RAILS (111 INCHES INSIDE WIDTH BETWEEN SIDE WALLS), COMMERCIAL BOXCARS WITH 50 FT 5 INCHES INSIDE LENGTH 110 INCHES INSIDE WIDTH, AND COMMERCIAL BOXCARS WITH 50 FT 6 INCHES INSIDE LENGTH, 110 INCHES INSIDE WIDTH
4. THE "LOAD LIMIT" OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE BALANCE BE LOADED SO THAT MORE THAN ONE-HALF OF THE "LOAD LIMIT" IS CARRIED BY ONE SET OF TRUCKS
5. IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED UP BEFORE STARTING TO LOAD CAR
6. THE LOAD CONSISTS OF ADAPTION KIT NSN 38 MOD 1 IN CONTAINER MK 182 MOD 1. IN ORDER TO EXPEDITE THE HANDLING AND LOADING OPERATION FOUR CONTAINERS MUST BE STACKED AND STRAPPED TOGETHER IN ACCORDANCE WITH THE PROCEDURES SHOWN ON PAGE 11 THE STRAPS MUST BE REMOVED WHEN THE BOXCAR IS UNLOADED
7. THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORKLIFT TRUCK
8. UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325 (NAVY)
9. ALL STRAP JOINTS SHALL BE CRIMP-TYPE JOINTS MADE WITH A CRIMPING TOOL THAT DOES NOT CUT THE SEAL OR STRAP, RATHER THAN A TOOL THAT MAKES A NOTCH-TYPE JOINT. SAID STRAPPING SHALL BE IN ACCORDANCE WITH NAVSUP NOTICE 4442 DATED 21 APRIL 1971
10. APPLICABLE MATERIAL SPECIFICATIONS:
    - DUNNAGE LUMBER - FED SPEC MM-L-751
    - NAILS - FED SPEC FF-N-105
    - STRAPPING - FED SPEC QQ-S-781, TYPE I, HEAVY DUTY, CLASS A DRY (UNLUBRICATED)
    - SEALS - FED SPEC QQ-S-781 STYLE SE, HEAVY DUTY
11. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA, CLOSE AND SEAL BOXCAR DOORS AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL I)

50 FT 6 IN BOXCAR, DODX

1. THE CARLOAD CONSISTS OF 96 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING
2. A DETAILED DESCRIPTION AND OPERATING INSTRUCTIONS FOR THE UTILITY LOADER ARE CONTAINED IN OP 1750
3. TO PREVENT UNRISED "DP" EQUIPMENT FROM BECOMING DISLODGED DURING TRANSIT OF DODX CARS SECURE IT AT ANY LOCATION IN THE BOXCAR WHICH WILL NOT INTERFERE WITH UNLOADING
4. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN DODX BOXCARS THE SAME PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE ANY BAYS OR PORTION THEREOF MAY BE USED PROVIDING THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR ARE COMPLIED WITH SEE MIL-STD-1325 (NAVY) EACH CROSSMEMBER WILL BE USED IN SUCH A MANNER THAT IT WILL RETAIN NOT MORE THAN 2000 LBS OF THE LADING

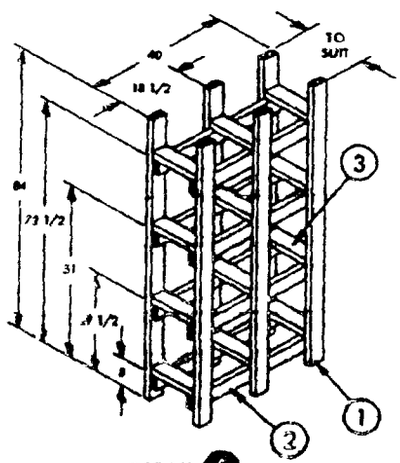


DETAIL A
STAY BRACING
10 REQUIRED

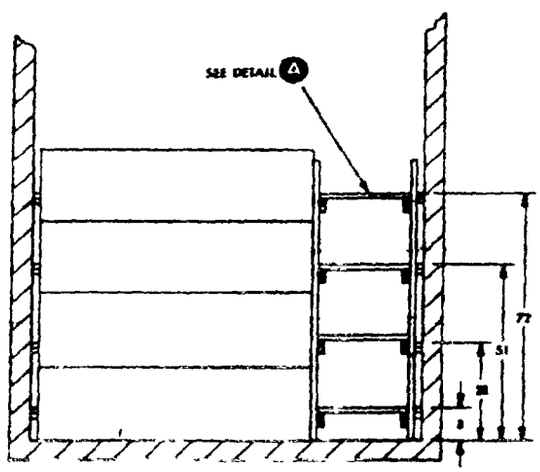


SECTION B-B
SHOW LOCATION OF WALL [illegible] AND DOORWAY MEMBERS
USED FOR CROSS MEMBERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.




LOADING PLAN

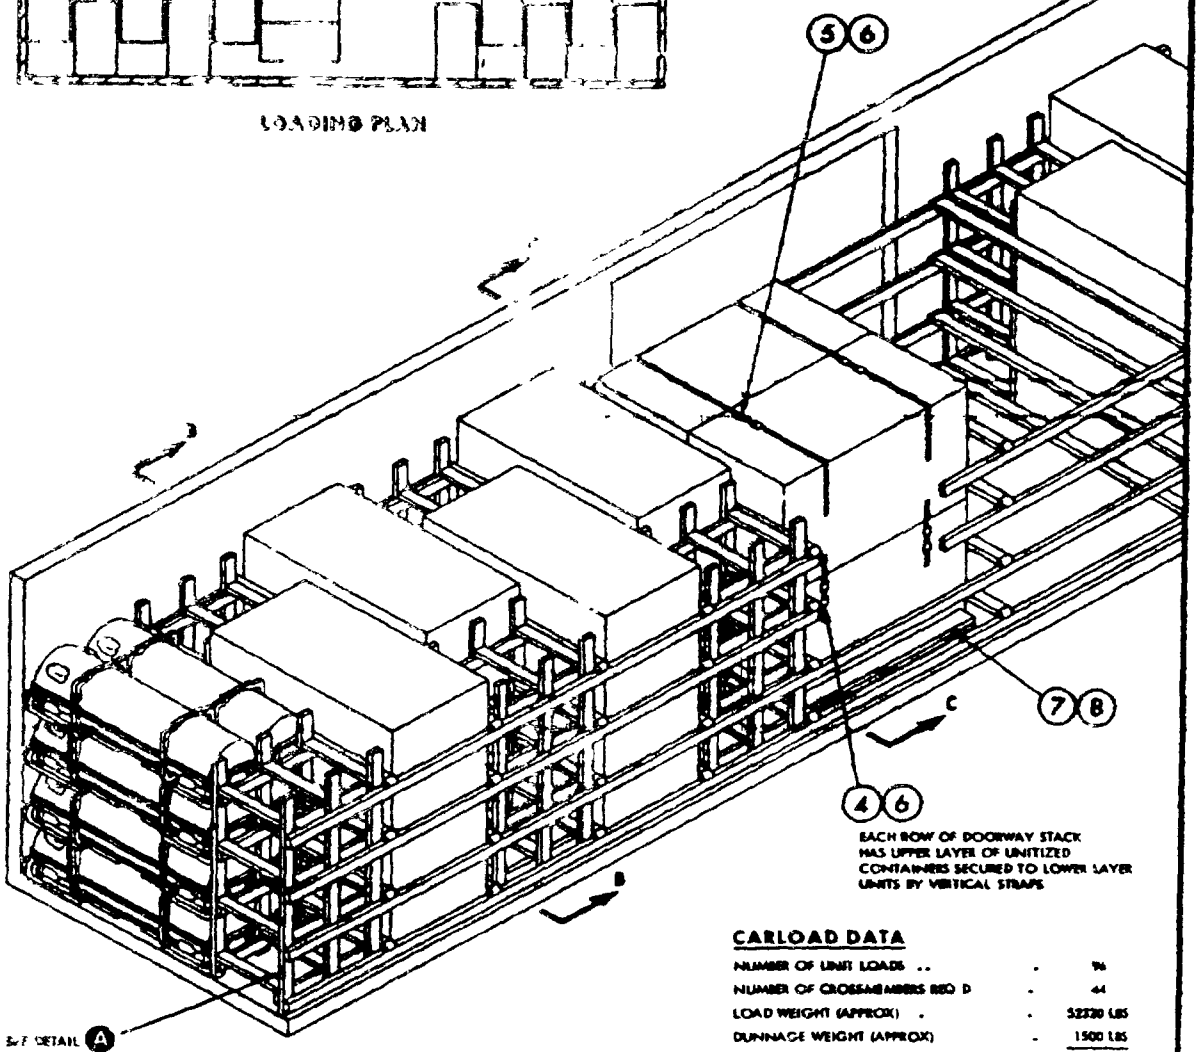

EACH ROW OF DOORWAY STACK HAS UPPER LAYER OF UNITIZED CONTAINERS SECURED TO LOWER LAYER UNITS BY VERTICAL STRAPS

CARLOAD DATA

NUMBER OF UNIT LOADS ..	96
NUMBER OF CROSSMEMBERS REQ'D	44
LOAD WEIGHT (APPROX)	52320 LBS
DUNNAGE WEIGHT (APPROX)	1500 LBS
CARLOAD WEIGHT (APPROX)	53820 LBS

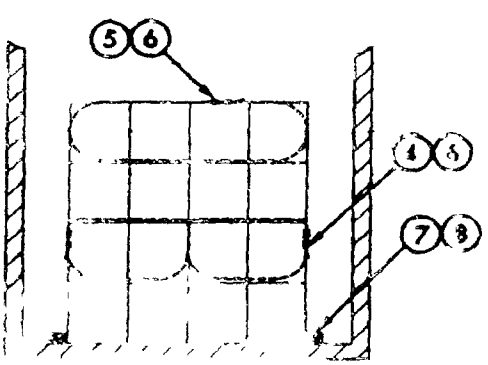

SECTION C-C


PIECE MARK	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
8	SLEEPER	2 X 6 X 72	2	7	2 PER FOOT	16d
7	SLEEPER	2 X 6 X 72	2	CAR FLOOR	2 PER FOOT	16d
6	SEAL	1 1/4	12	-	-	-
5	CROSS STRAP	1 1/4 X .035 X 289"† 6	3	-	-	-
4	VERTICAL STRAP	1 1/4 X .035 X 121"† 6	4	-	-	-
3	3WAY BRACE STRUT	2 X 4 X TO SUIT	180	1	2 PER JOINT	16d
2	3WAY BRACE HORIZONTAL	2 X 4 X 48	80	1	3 PER JOINT	16d
1	3WAY BRACE VERTICAL	2 X 4 X 84	60	SEE 2	-	-

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

40 FT 6 IN BOXCAR, COMMERCIAL


1. [illegible] CONSISTS OF 38 CONT[illegible] INCH [illegible] BOARD [illegible] IN ACCORDANCE WITH THIS PROCEDURAL STANDARD.
2. [illegible] LOADS (LCL) FOR [illegible] ARE USED TO [illegible] IN COMMERCIAL SERVICE AND A PARTIAL LAYER RESULTS, THE [illegible] SHALL BE DENOTED BY SUFFIX OF A/D AND/OR PARTIAL LAYER LOADING CONSTRUCTED IN ACCORDANCE WITH MIL STD 1125-55(NAVY) OR PARTIAL LAYER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1125-55 (NAVY). SELECT THE TYPE OF [illegible] TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE [illegible]. THE FLOOR DISTRIBUTION REQUIREMENTS OF THE CAR MUST BE COMPLIED WITH, SEE MIL-STD-1125 (NAVY).
3. THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 7 FT [illegible] DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS HAVING DW NOT LESS THAN 7 FT [illegible].
4. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS. PLUG DOORS MUST BE SECURELY CLOSED AND LOCKED TO PREVENT [illegible] WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY [illegible] AND THE ENDS TWISTED TOGETHER.

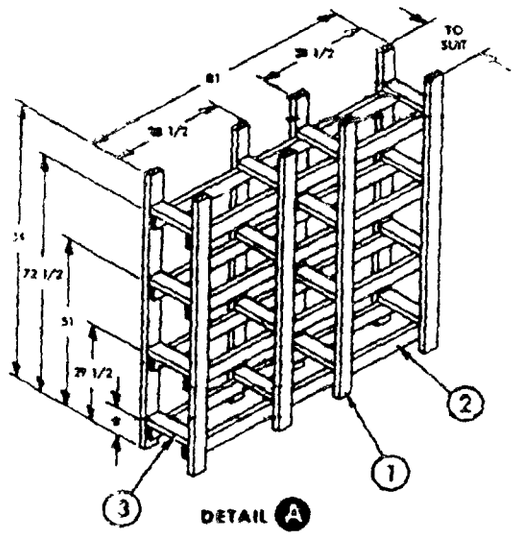


DETAIL A
STAY BRACING
9 REQUIRED

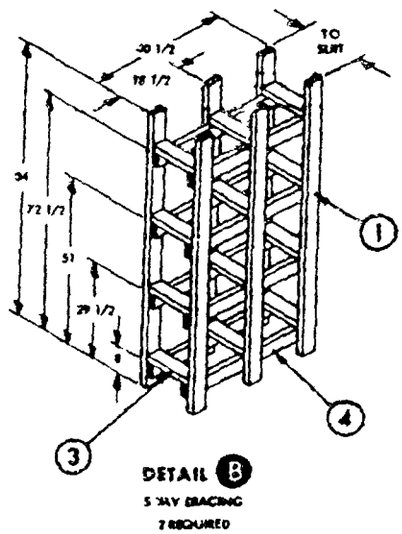

DETAIL B
STAY BRACING
2 REQUIRED

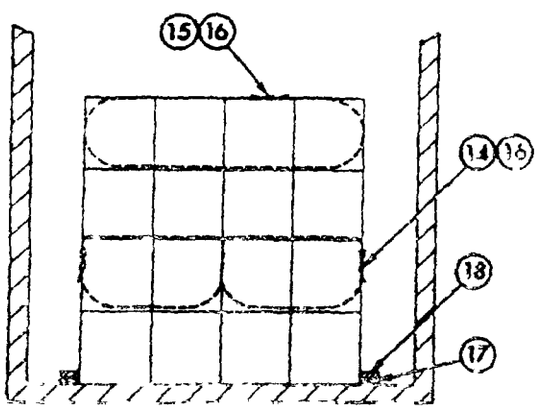


SECTION C-C
SHOWING LOCATION OF STRAPS

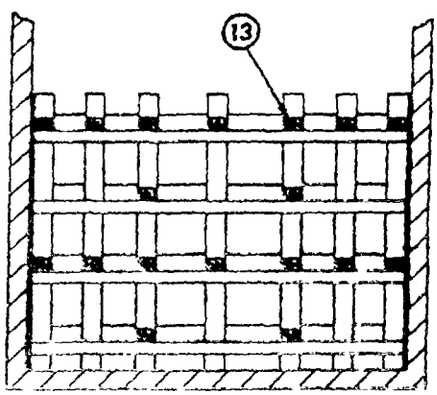

SECTION D-D
SHOWING LOCATION OF STRUTS

NOTE


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

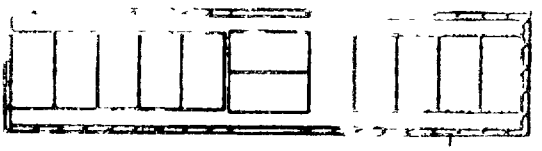

LOADING PLAN

CARLOAD DATA

[illegible] OF UNITS [illegible] . . . 8
LOAD WEIGHT (NET) 38,136
[illegible] WEIGHT (APPROX) . . . . . 2,736 LBS
LOAD WEIGHT (APPROX) . . . . . 40,872 LBS

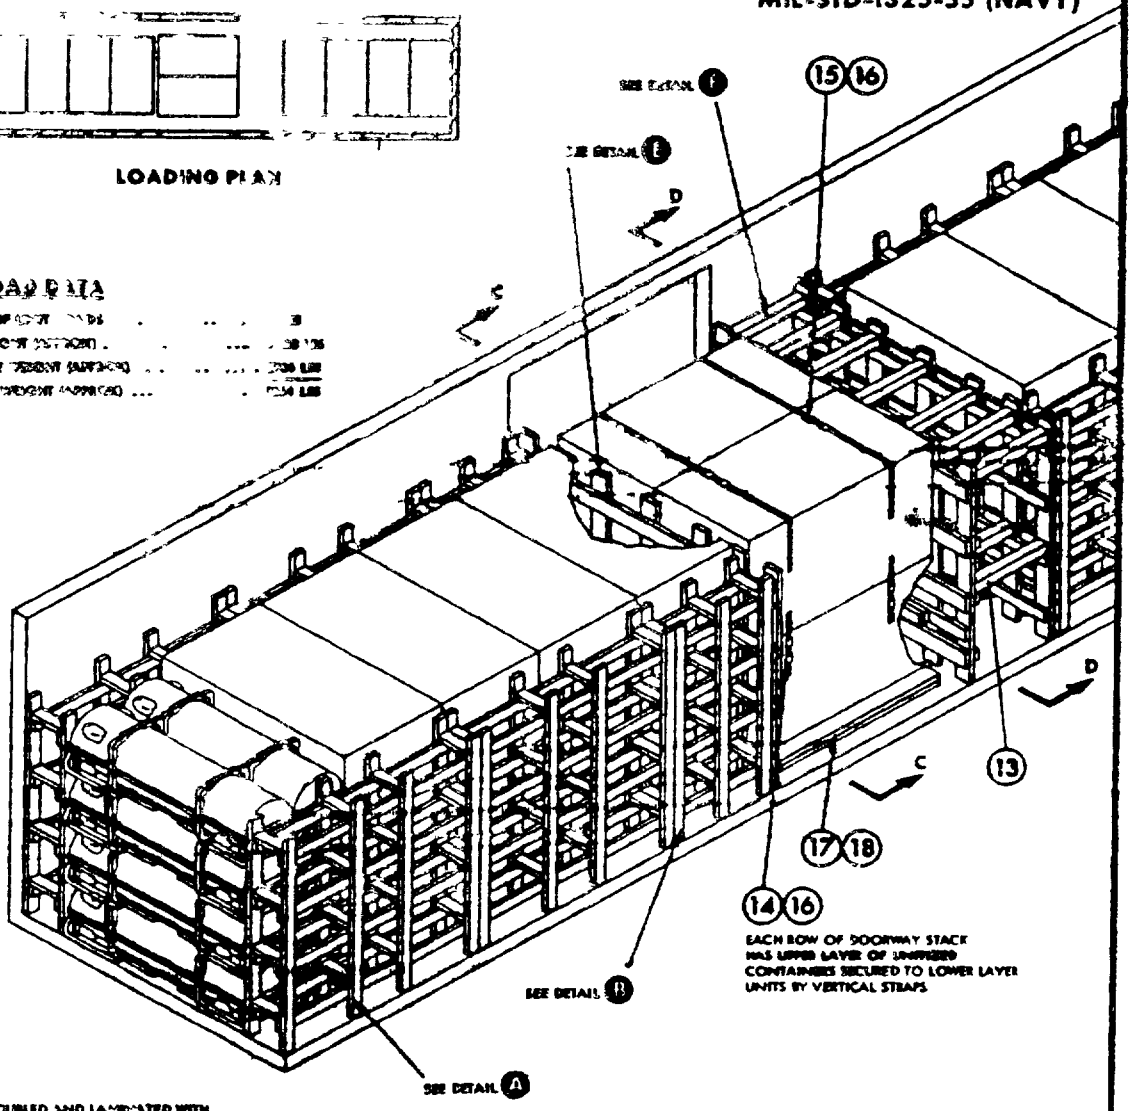


* 2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4'S

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	NAILS SIZE
9	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH - 1	8	8	3 PER JOINT	10d
8	CENTER GATE VERTICAL	2 X 6 X 84	14	SEE 7 9	-	-
7	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	8	8	3 PER JOINT	30d
6	SEPARATOR GATE VERTICAL	2 X 6 X 84	7	SEE 5	-	-
5	SEPARATOR GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	4	6	3 PER JOINT	10d
4	SWAY BRACE HORIZONTAL	2 X 4 X 48 1/2	16	1	3 PER JOINT	10d
3	SWAY BRACE STRUT	2 X 4 X TO SUIT	32	1	2 PER JOINT	10d
2	SWAY BRACE HORIZONTAL	2 X 4 X 81	64	1	3 PER JOINT	10d
1	SWAY BRACE VERTICAL	2 X 4 X 84	76	SEE 2	-	-


PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	NAILS SIZE
10	SLEEPER	2 X 6 X 72	2	17	2 PER FOOT	16d
17	SLEEPER	2 X 6 X 72	2	CAR FLOOR	2 PER FOOT	16d
16	SEAL	1 1/4	12	-	-	-
15	CROSS STRAP	1 1/4 X .035 X 20 FT 6	2	-	-	-
14	VERTICAL STRAP	1 1/4 X .035 X 10 FT 6	4	-	-	-
13	STRUT	4 X 4 X 8 WEDGE FIT	18	8	2 PER JOINT	16d
12	HOLD DOWN	2 X 4 X TO SUIT	4	11	4	16d
11	HOLD DOWN	2 X 4 X TO SUIT	4	10	4	16d
10	HOLD DOWN SPACER	2 X 4 X CAR WIDTH - 1	2	9	3 PER JOINT	16d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

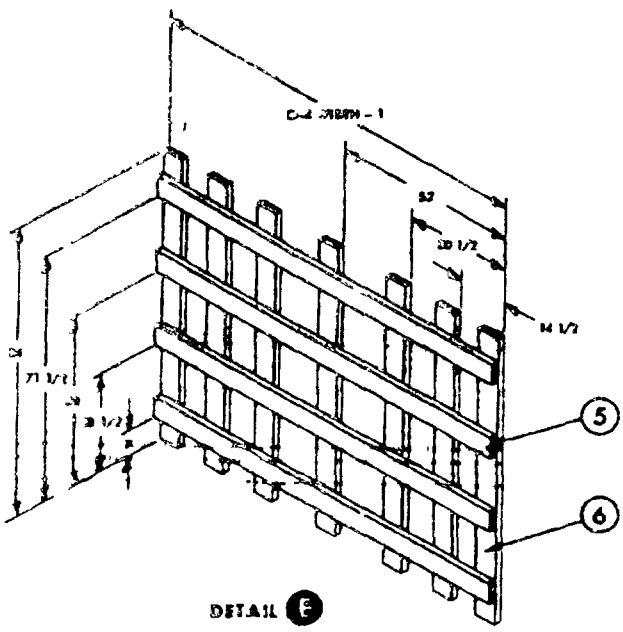

DETAIL E
SEPARATOR GATE
1 REQUIRED

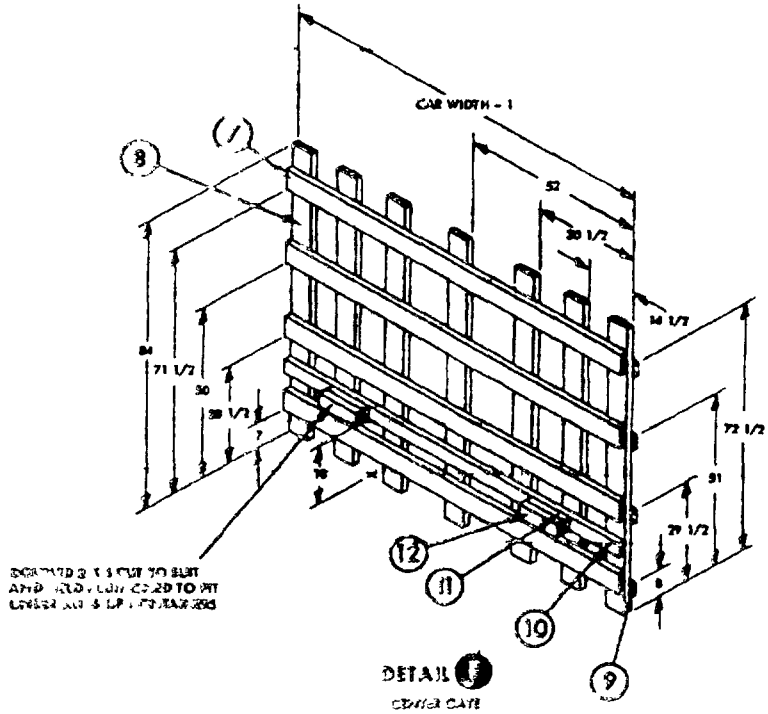

DETAIL F
CENTER GATE
2 REQUIRED


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

50 FT 6 IN BOXCAR, COMMERCIAL


1. THE CARLOAD CONSISTS OF 112 CONTAINERS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING
2. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS, THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF SIDE BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-38 (NAVY) OR PARTIAL UPPER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1325-108 (NAVY). SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE LOADS TO BE RETAINED. THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH. SEE MIL-STD-1325 (NAVY)
3. THE LOAD IS AS SHOWN AS BASED ON CARS WHICH HAVE 10 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 10 FT WIDE
4. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS. PLUG DOORS MUST BE SOLIDLY CLOSED AND WIRED TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER

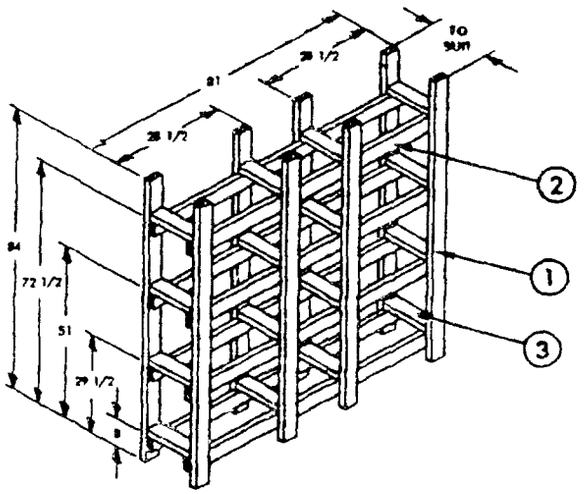

DETAIL A
SWAY BRACING
12 REQUIRED

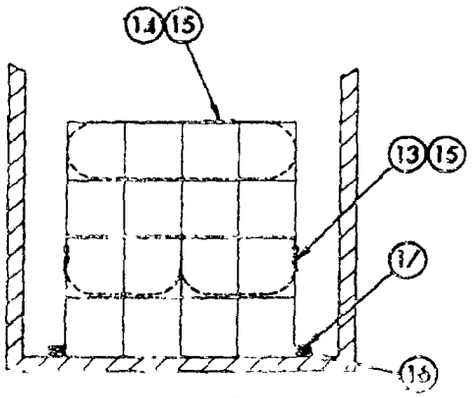


SECTION B-B
SHOWING LOCATION OF STRUTS

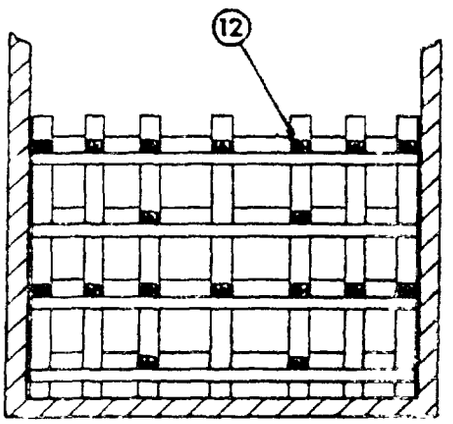

SECTION C-C
SHOWING LOCATION OF STRUTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

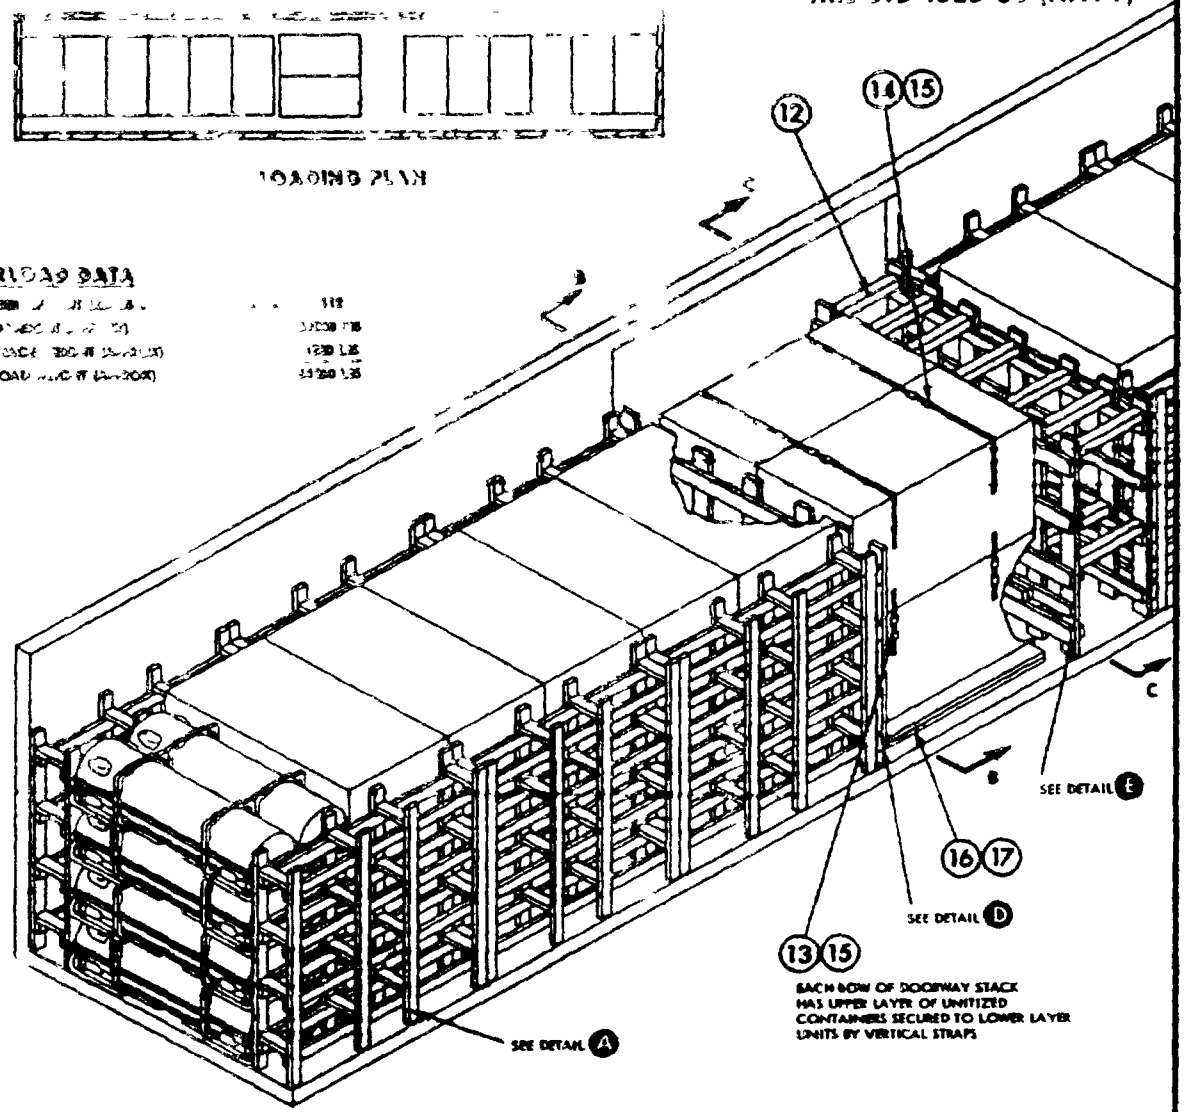


* 2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4 s


PIECE NO	SIZE DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE	PIECE NO	SIZE DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS							NAILS	
9	HOLD DOWN SPACER	2 X 4 X CAR WIDTH - 1	2	7	3 PER JOINT	16d							
8	CENTER GATE STRUT, DIAG.	2 X 4 X CAR WIDTH - 1	8	7	3 PER JOINT	16d	17	SLEEPER	2 X 6 X 72	2	CAR FLOOR	2 PER FOOT	16d
7	CENTER GATE VERTICAL	2 X 6 X 84	14	SEE 6, 8	-	-	16	SLEEPER	2 X 6 X 72	2	CAR FLOOR	2 PER FOOT	16d
6	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	8	7	3 PER JOINT	16d	15	SEAL	1 1/4	12	-	-	-
5	SEPARATOR GATE VERTICAL	2 X 6 X 84	7	SEE 6	-	-	14	CROSS STRAP	1 1/4 X .035 X 22 FT 6	2	-	-	-
4	SEPARATOR GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	4	5	3 PER JOINT	16d	13	VERTICAL STRAP	1 1/4 X .035 X 13 FT 6	4	-	-	-
3	SWAY BRACE STRUT	2 X 4 X TO SUIT	192	1	2 PER JOINT	16d	12	STRUT	4 X 4 X * WEDGE FIT	10	7	2 PER JOINT	16d
2	SWAY BRACE HORIZONTAL	2 X 4 X 81	96	1	3 PER JOINT	16d	11	HOLD DOWN	2 X 4 X TO SUIT	4	10	4	10d
1	SWAY BRACE VERTICAL	2 X 4 X 84	96	SEE 2	-	-	10	HOLD DOWN	2 X 4 X TO SUIT	4	9	4	10d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

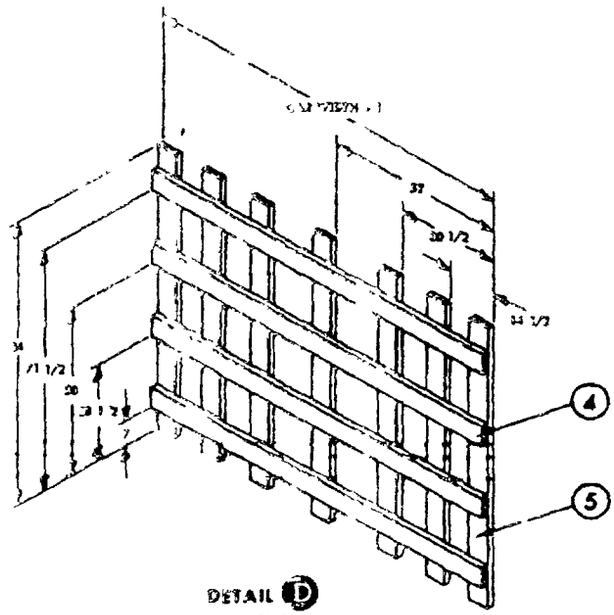


DETAIL D
SEPARATOR GATE
1 REQUIRED

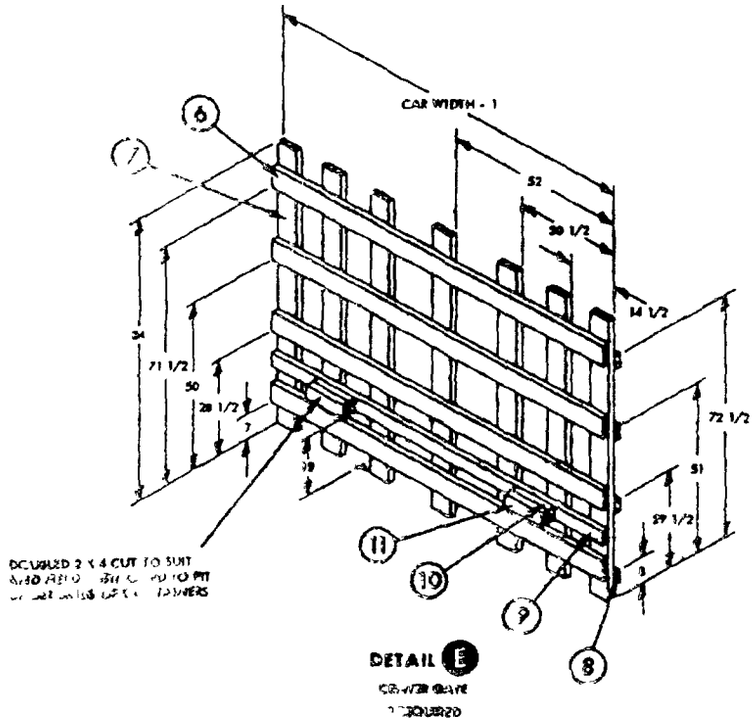

DETAIL E
COUPLER GATE
1 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

STACKING AND STRAPPING FOR CARLOADING ONLY

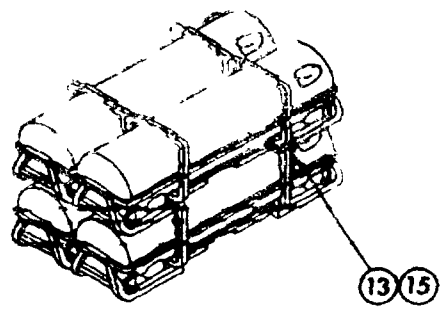

CONTAINER STACKING AND BANDING PROCEDURE

1. POSITION BOTTOM CONTAINERS SIDE BY SIDE WITH FORE AND AFT ENDS IN THE SAME DIRECTION
2. STACK A TOP CONTAINER ON EACH BOTTOM ONE WITH FORE AND AFT END IN THE SAME DIRECTION AS THE BOTTOM CONTAINER

NOTE

ALL STACKING FEATURES MUST BE IN ALIGNMENT

3. POSITION TWO 3/4" X .025 STEEL STRAPS UNDER BODY OF BOTTOM TWO CONTAINERS AND OVER SKIDS OF TOP TWO CONTAINERS AS SHOWN. TENSION AND SEAL WITH TWO DOUBLE CRIMPED 3/4" SEALS
4. REMOVE STRAPPING FROM CONTAINERS AFTER UNLOADING THE BOXCAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDING OFFICER
NAVAL WEAPONS STATION EARLE
NAVAL WEAPONS HANDLING LABORATORY (803)
COLTS NECK, NEW JERSEY 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help [illegible] procurement of suitable products at reasonable cost and minimum delay, or will [illegible] DoD contractors, government activities, or manufacturers/vendors who [illegible] are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-STD-1325-55 (Navy)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO DATE

DD FORM 1426 PREVIOUS EDITION OF 1 JAN 63 IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.