INCH-POUND

MS21260P
13 July 2021
SUPERSEDING
MS21260N
19 September 2011

DETAIL SPECIFICATION SHEET

TERMINAL, WIRE ROPE, SWAGING, STUD

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet, MIL-DTL-781, and QPL-781.

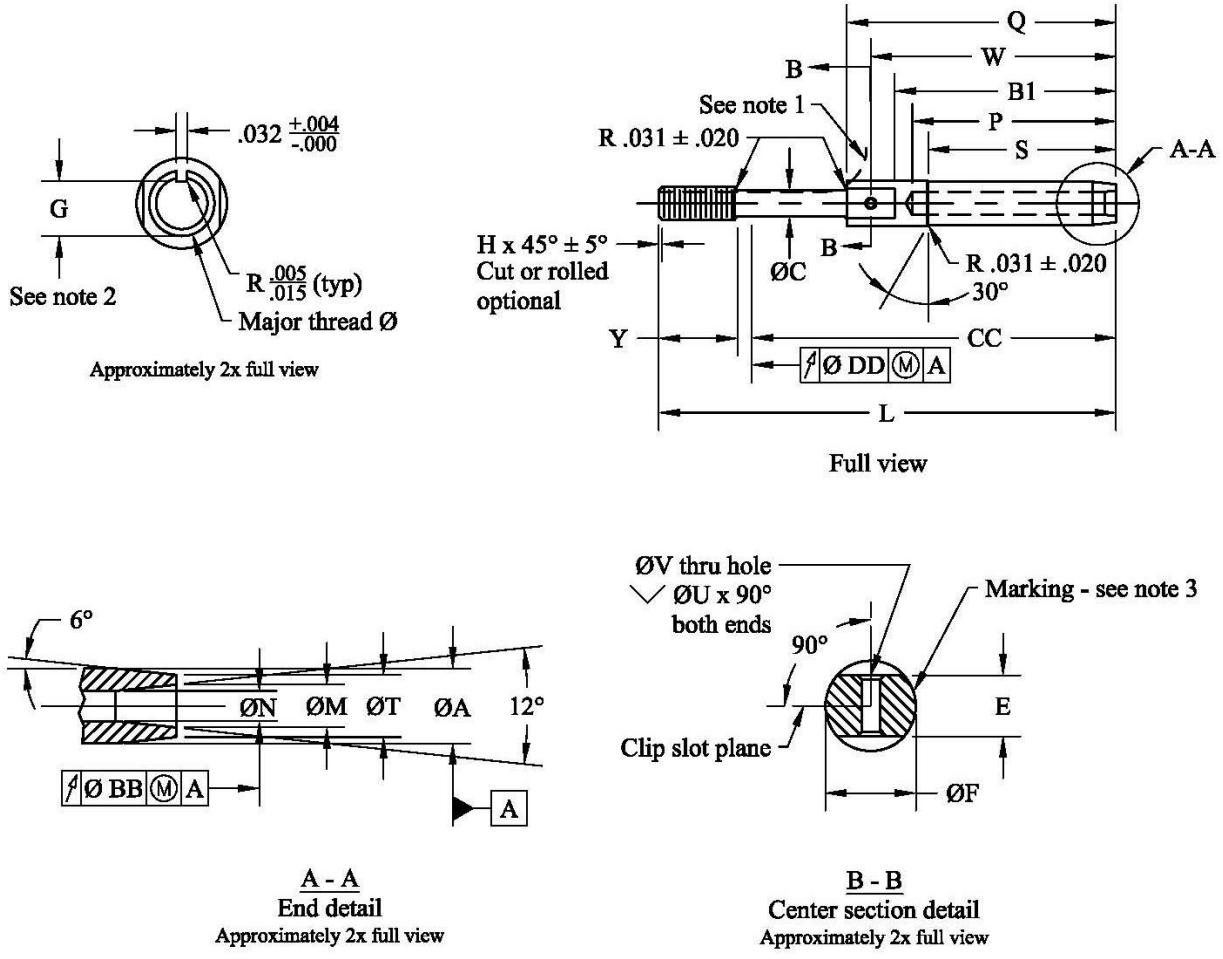


FIGURE 1. Terminal, wire rope, swaging, stud, as manufactured.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

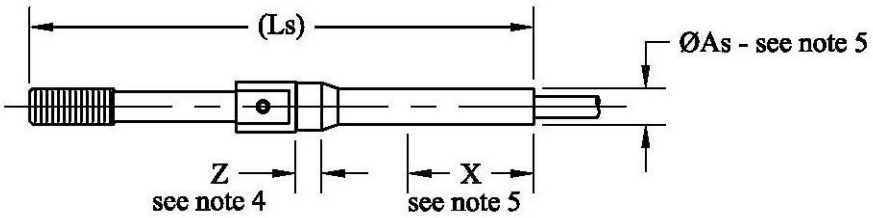


FIGURE 2. Terminal, wire rope, swaging, stud, after swaging.

Figure notes:

1. Cutter radius mark, which is used as the clip slot alignment indicator, shall be present on the center section end. Depending on tolerance conditions, the slot cutter may or may not contact ØC. Presence or absence of slot on ØC is not cause for rejection.
2. Clip slot (dimension G x .032) is optional for sizes -12 and above.
3. Markings: Mark with MS part number and Mfg. identification. Complete MS part number required on sizes -6 and above. Only MS21260 is required on sizes -2 through -5. Position on center section is optional and may be in multiple areas. Indent .010 max.
4. Z is a minimum dimension. Swaging shall not extend into this area.
5. ØAs shall extend a minimum of X. The original taper area may have twice the specified diameter tolerance provided there are no rapid changes in cross section or evidence of splits, cracks or other injurious defects.
6. Reference dimensions are for design purposes only and are not a conformance inspection requirement.

TABLE I. Dash numbers and dimensions.

Dash number 2/		Wire rope diameter		Minimum breaking strength (lbf) 1/	Thread B UN-3A UNF-3A	ØA		ØAs	
RH thread	LH thread	Nominal reference	Minimum						
L2RH	L2LH	1/16	.062	480	.1380 (# 6)-40	.160		.138	
S2RH	S2LH								
L3RH	L3LH	3/32	.093	920	.1900 (#10)-32	.218		.190	
S3RH	S3LH								
L4RH	L4LH	1/8	.125	2,000	.2500 (1/4)-28	.250		.219	+.000 -.005
S4RH	S4LH								
L5RH	L5LH	5/32	.156	2,800		.297		.250	
S5RH	S5LH								
L6RH	L6LH	3/16	.187	4,200	.3125 (5/16)-24	.359		.313	
S6RH	S6LH								
-7RH	-7LH	7/32	.218	5,600	.3750 (3/8)-24	.427	+.000 -.005	.375	+.000 -.007
-8RH	-8LH	1/4	.250	7,000		.494		.438	
-9RH	-9LH	9/32	.281	8,000	.4375 (7/16)-20	.563		.500	
-10RH	-10LH	5/16	.312	9,800	.5000 (1/2)-20	.635		.563	+.000 -.008
-12RH	-12LH	3/8	.375	14,400	.5625 (9/16)-18	.703		.625	
-14RH	-14LH	7/16	.437	17,600	.6250 (5/8)-18	.781		.688	
-16RH	-16LH	1/2	.500	22,800	.6250 (5/8)-18	.844		.750	+.000 -.009
-18RH	-18LH	9/16	.562	28,500	.7500 (3/4)-16	.984		.875	
-20RH	-20LH	5/8	.625	35,000	.8750 (7/8)-14	1.109		1.000	+.000 -.010
-24RH	-24LH	3/4	.750	49,600	1.0000 (1)-12	1.359		1.250	+.000 -.012
-28RH	-28LH	7/8	.875	66,500	1.1250 (1 1/8)-12	1.593	+.000 -.010	1.437	
-32RH	-32LH	1	1.000	85,400	1.2500 (1 1/4)-12	1.812		1.625	

1/ To achieve the minimum breaking strength, for the terminal test only, a galvanized carbon steel wire rope shall be used.
2/ Only first section of table I shows RH and LH thread dash numbers. Continued sections show only base dash number, add RH or LH as needed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash number	B_1		∅C +.006 -.000 (Shank Ø)	E	∅F	G		H	
						Maximum	Minimum	Maximum	Minimum
L2	1.042	±.063	.092	.156	.188.	.1139	.1094	0.031	.015
S2									
L3	1.261		.133	.187	.250	.1638	.1568	.047	
S3									
L4	1.511		.195	.250	.313	.2224	.2152		
S4									
L5	1.761								
S5									
L6	2.011		.245	.312	.375	.2830	.2754		
S6									
-7	2.261		.306	.375	.438	.3454	.3378		
-8	2.511			.438	.500				
-9	2.761		.361	.563	.625	.4052	.3972		
-10	3.011		.406	.625	.688	.4678	.4597	.063	.031
-12	3.511		.476	.688	.750	.5285	.5201		
-14	4.011		.538	.750	.812	.5909	.5826		
-16	4.698			.812	.875				
-18	5.011		.654	.875	1.000	.7137	.7050	.078	.048
-20	5.511		.768	1.000	1.125	.8558	.8266		
-24	6.511		.893	1.125	1.438	.9608	.9516		
-28	7.166		1.002	1.438	1.625	1.0819	1.0772	.094	.062
-32	8.229		1.128	1.625	1.812	1.2069	1.1972		

TABLE I. Dash numbers and dimensions - Continued.

Dash number	L ±.063	(Ls) reference	∅M		∅N		P		Q +.031 -.016	S +.062 -.000	∅T	
L2	3.491	3.67	.090	+.010 -.000	.078	+.005 -.000	1.042	+.031 -.000	1.319	0.969	.138	+.000 -.010
S2	2.616	2.79										
L3	3.738	3.86	.119		.109		1.261		1.581	1.188	.190	
S3	2.863	2.98										
L4	4.020	4.28	.154		.141		1.511		1.863	1.438	.219	
S4	3.145	3.40										
L5	4.314	4.66	.188		.172		1.761		2.157	1.688	.250	
S5	3.439	3.78										
L6	4.612	4.78	.223		.203		2.011		2.455	1.938	.313	
S6	3.737	3.90										
-7	4.914	5.21	.257		.234		2.261		2.757	2.188	.375	
-8	5.218	5.52	.291		.265		2.511		3.061	2.438	.438	
-9	5.542	5.90	.326		.297		2.761		3.385	2.688	.500	
-10	5.875	6.30	.360		.328		3.011		3.718	2.938	.563	
-12	6.608	7.01	.430	+.012 -.000	.404	+.008 -.000	3.511	+.047 -.000	4.281	3.438	.625	
-14	7.468	7.94	.514		.468		4.011		4.812	3.938	.688	
-16	8.718	9.28	584		.531	+.009 -.000	4.698		5.562	4.625	.750	
-18	9.188	9.78	0.653		.594		5.011		6.000	4.938	.875	
-20	10.469	11.16	.722		.656	+.010 -.000	5.511	+.062 -.000	6.750	5.438	1.000	
-24	12.188	12.76	.860	+.015 -.000	.781	+.012 -.000	6.511		7.938	6.438	1.250	+.000 -.012
-28	12.851	13.61	1.013		.921		7.166		8.601	7.094	1.437	
-32	14.624	15.53	1.151		1.046		8.229		9.844	8.156	1.625	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash number	∅U reference	∅V ±.005	W ±.031	X Minimum	Y ± .047 2/	Z Minimum	∅BB (FIM)	CC (nom)	DD (FIM) 3/
L2	.094	.063	1.174	.70	.375	0.03	.016	2.818	.030
S2								1.943	
L3			1.411	.80	.500			2.940	
S3								2.065	
L4	.125	.098	1.682	1.05	.563			3.159	.016
S4								2.284	
L5			1.958	1.29	.625			3.391	
S5								2.561	
L6			2.237	1.31	.750			3.564	
S6								2.689	
-7			2.518	1.55	.875			3.741	
-8			2.784	1.70				4.045	
-9			3.076	1.89	1.000			4.244	
-10			3.326	2.06				4.577	
-12			3.828	3.12	1.125		.020	5.185	.020
-14			4.375	3.57	1.250			5.920	
-16	.188	.125	5.093	4.31				7.170	
-18			5.468	4.51	1.500			7.390	
-20			6.093	5.04	1.750		.030	8.421	.030
-24			7.188	5.80	2.000			9.890	
-28			7.846	6.31			.040	10.553	.040
-32			9.000	7.26	2.250			12.076	

2/ Includes last full thread engagement.
3/ Excepting locking clip slot

REQUIREMENTS:

1. Material: Material shall be in accordance with MIL-DTL-781

2. Finish: Finish shall be in accordance with MIL-DTL-781.

3. Threads: Threads shall be in accordance with ASME B1.1.

4. Swage: Swage shall be in accordance with MIL-DTL-6117.


5. Tolerances: Unless otherwise specified, tolerances: decimals ± .010, angles ±3°.

NOTES:

1. The part or identifying number (PIN) to be used for terminals acquired to this specification is created as shown below. An "L" in lieu of dash indicates long; an "S" in lieu of a dash indicates short. The two letters following the dash number or letters "L" or "R" indicates direction of thread (left or right hand).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

EXAMPLE: MS 21260 - 7RH

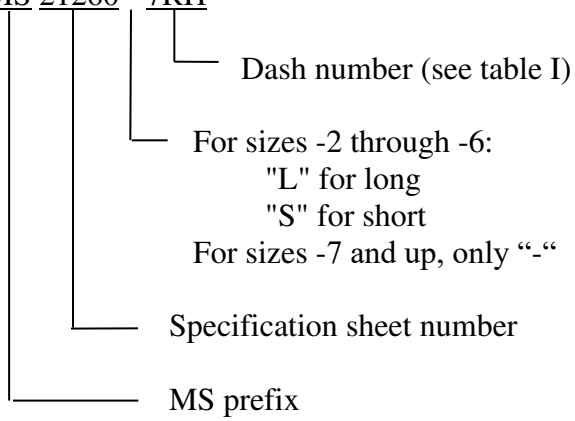

MS21260L2RH Indicates - Terminal, .062 (1/16) dia. wire rope, .1380 (#6)-40 right hand thread, long shank.
MS21260-7RH Indicates - Terminal, .218 (7/32) dia. wire rope, .3750 (3/8)-24 right hand thread.

2. Dimensions are in inches.

3. Remove burrs and sharp edges. (See MIL-DTL-781.)

4. Interpret drawing in accordance with ASME Y14.5M.

5. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

6. Unless otherwise specified, issues of reference documents are those in effect at the time of solicitation.

7. Interchangeability relationship: MS21260 parts can universally replace the canceled AN669 and NAS650 parts identified by the same dash number; but the canceled AN669 and NAS650 parts cannot replace the superseding MS21260 parts. MS21260 corrosion resistant steel parts can universally replace the canceled carbon and alloy steel parts identified by the same dash number.

8. Carbon and alloy steel parts are inactive for new design.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

APPENDIX A

3D model for reference only. Model typical of small, long shaft terminals.

Viewing this model requires a PDF viewer that supports 3D models.
Adobe Acrobat is known to support 3D models but there may be other suitable viewers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR4
Navy - AS
Air Force - 71
DLA - GS

Review Activities:
Navy - MC

Preparing Activity:
DLA - GS5

(Project 1640-2021-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.