
USER SYMBOLS NAVY - AS

REVIEWER SYMBOLS NAVY - AS

Reviewer/User information is correct as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND, Department of the Navy, and is for mandatory use by that activity. All other military activities are required to employ this standard where suitable

FED SUP CLASS 2995

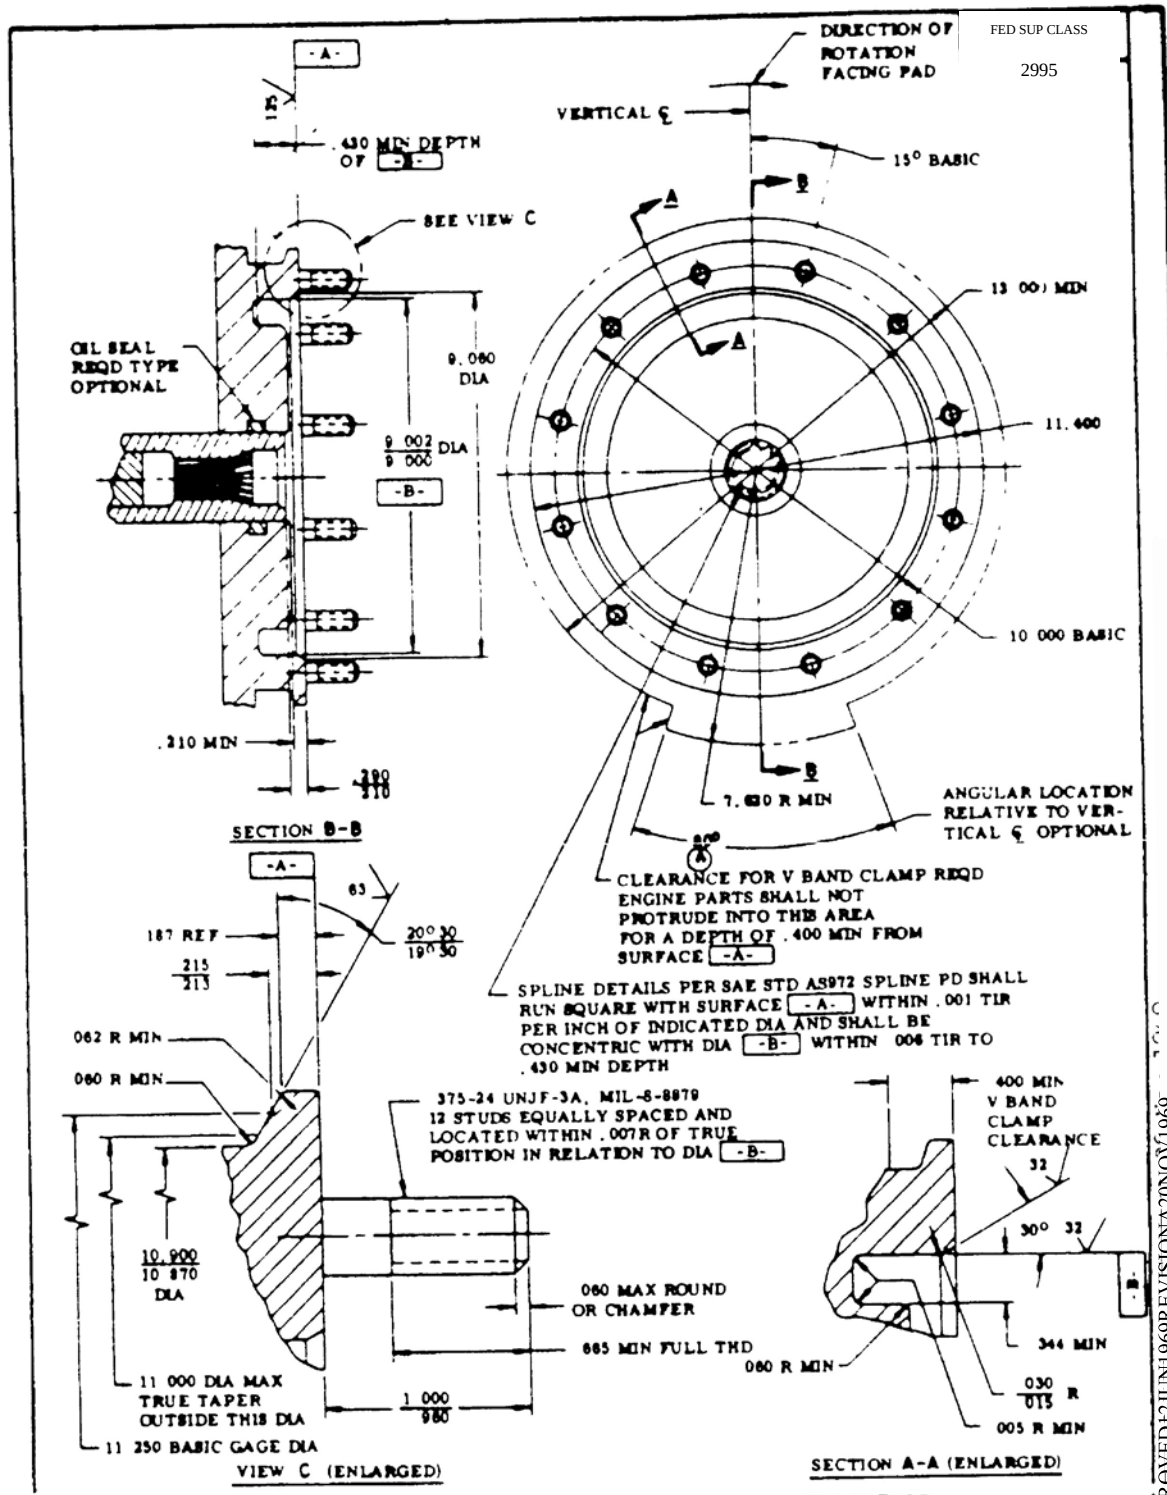

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

APPROVED 12 JUN 1969 REVISION A 20 NOV 1969

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust	DRIVE PAD - ACCESSORY, 10.000 BC ROUND, DESIGN STANDARD FOR	MS3329(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 3

DD FORM 672-1 (Obsolete coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.

USER SYMBOLS NAVY - AS

REVIEWER SYMBOLS NAVY - AS

Reviewer/User information is correct as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND, Department of the Navy, and is for mandatory use by that activity. All other military activities are required to employ this standard where suitable

DASH NO	RATED TORQUE, LB IN	RATED POWER, HP	RATED SPEED, RPM ±5%	SPLINE SIZE, PD	ACCESSORY	
					WEIGHT-LB MAX	STATIC OVERHUNG MOMENT, LB-IN., MAX
-1	--	60	8000	1 200	135	1700
-2	--	80	8000	1 200	150	2000
-3	--	130	8000	1 625	175	2500
-4	--	180	8000	1 625	225	3000
-5	--	240	8000	1 625	275	3600
-6	--	45	6000	0 800	90	550
-7	--	65	6000	0 800	100	800
-8	--	95	6000	1 200	125	750
-9	--	140	6000	1 200	150	1100
-10	--	200	6000	1 200	175	1500
-11	4000	--	4000	1 625	125	800
-12	9000	--	4000	2 000	200	1200

NOTES

1 SPEED THE RATED SPEED OF ALL THE DRIVES EXCEPT THE STARTER DRIVES (TYPE 'S") SHALL BE PROVIDED WHEN THE POWER SOURCE IS OPERATING AT THE HIGHEST STABILIZED SPEED AT ANY OPERATING CONDITION

2 STRENGTH ALL THE DRIVES EXCEPT THE STARTER DRIVES (TYPE 'S'), SHALL BE CAPABLE OF DELIVERING RATED POWER OR TORQUE CONTINUOUSLY FROM GROUND IDLE TO MAXIMUM POWER SOURCE SPEED THEY SHALL ALSO WITHSTAND AN INSTANTANEOUS TORQUE EQUIVALENT TO FIVE TIMES THE RATED POWER OR TORQUE AT ANY ENGINE SPEED WITHOUT PERMANENT DEFORMATION OR FAILURE

3 LUBRICATION POSITIVE ENGINE OIL LUBRICATION SHALL BE PROVIDED TO THE SPLINE

4 OIL LEAKAGE OIL LEAKAGE OUT OF THE DRIVE SHALL NOT EXCEED 3 CC PER HOUR PROVISIONS FOR DRAINING OIL FROM THE DRIVE CAVITY SHALL BE SUPPLIED

5 DIMENSIONS DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.
TOLERANCES DECIMALS ± .010 ANGLES ± 2°

6 FINISH BREAK SHARP EDGES 003 - 015 UNLESS OTHERWISE SPECIFIED

7 SURFACE TEXTURE IN ACCORDANCE WITH USAS B46 1-1962

8 SAE AS STANDARDS ARE PUBLICATIONS OF THE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., TWO PENNSYLVANIA PLAZA NEW YORK, N Y 10001

APPROVED12JUN1969REVISONA20NOV1969

P.A. NAVY - AS	TITLE	MILITARY STANDARD
	DRIVE PAD - ACCESSORY, 10.000 BC ROUND, DESIGN STANDARD FOR	MS3329(AS)
NONE		

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.