FED. SUP CLASS
2590

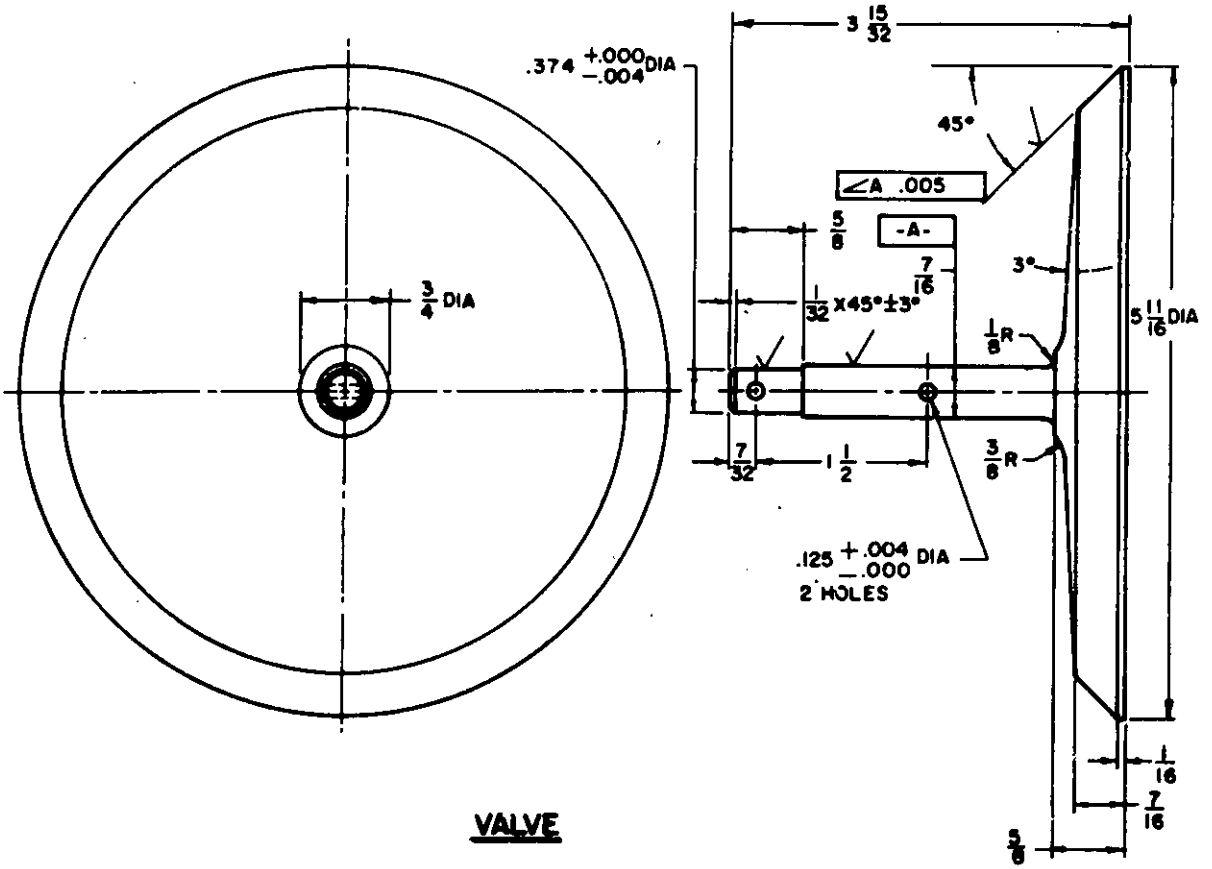

VALVE

NOTES:
1. MATERIAL: STEEL, CASTING, (105-85) SPEC QQ-S- ... STEEL FORGING ALLOY 8125, 8130, 4130 OR 5130, GRADE D, ...
2. HEAT-TREAT: QUENCH AND TEMPER, BRI... 23-28).
3. FINISH: CADMIUM PLATE IN ACCORD... , TYPE II, CLASS C.
4. UNLESS OTHERWISE SPECIFIED, ... SHALL BE 125 WHERE SHOWN WITH ROUGHNESS SYMBOL √: UNMA... IN ACCORDANCE WITH MIL-STD-10.
5. UNLESS OTHERWISE SPECI... INCHES. TOLERANCES ARE: MACHINED SURFACES, FRACTIONS ±1/64, D... 30': UNMACHINED SURFACES, FRACTIONS ±1/32, ANGLES ±1°.
6. REFERENCED D... ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
7. MARKING S... PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCOR...

© CANCELLED AFTER 30 APRIL 1980.
NO SUPERSEDING STANDARD.

APPROVED 9 JANUARY 1961 REVISED (A) 18 OCTOBER 1966 (B) 20 SEPT 1977 © 30 APRIL 1980

MS PART NO.
MS 51346-1

P.A. ARMY-AT Other Cust	TITLE SEAT, HULL DRAIN POPPET VALVE: ASSEMBLY, VEHICULAR, 5 INCH	MILITARY STANDARD MS51346 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

*U.S. GOVERNMENT PRINTING OFFICE: 1966-251-514/X-303