ment may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
6685

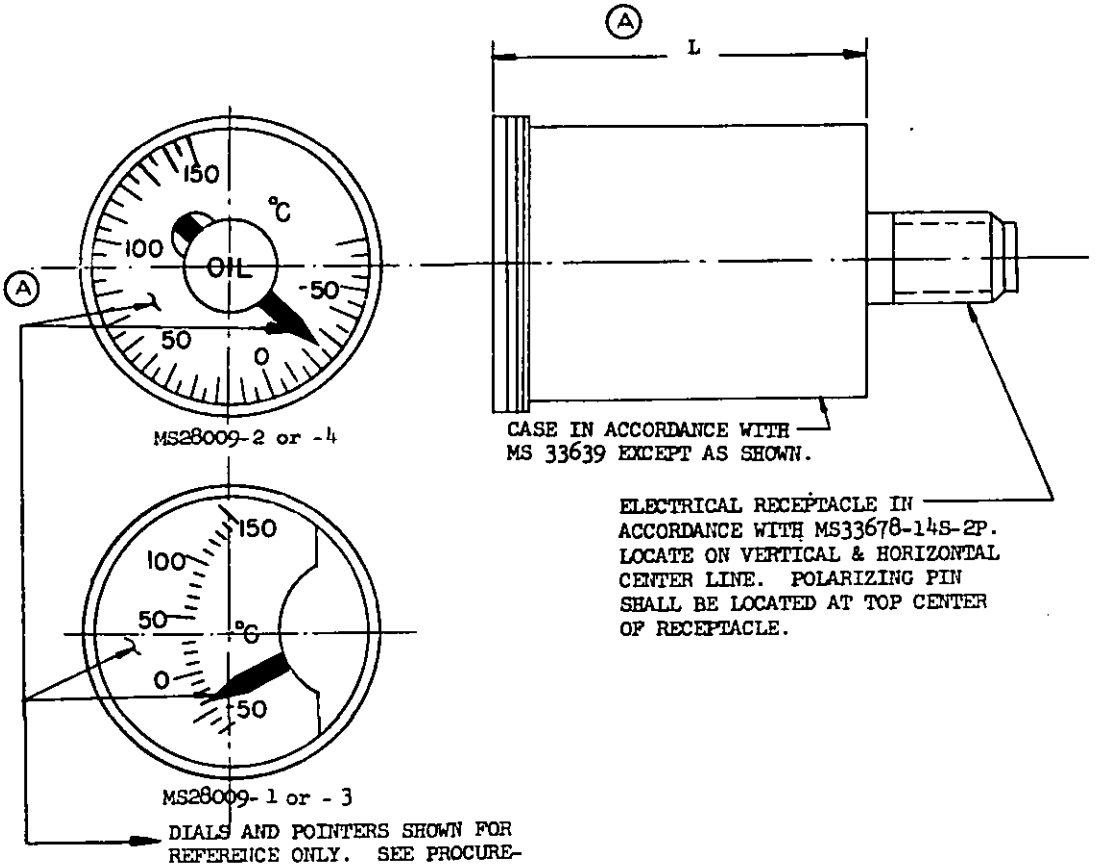

B
A

MS PART NO.	DIAL MARKINGS	APPROXIMATE SCALE LENGTH DEGREES	CASE LENGTH	PROCUREMENT SPECIFICATION
MS28009-1 MS28009-3	FLOURESCENT LUSTERLESS WHITE	100	2-3/4 ± 1/4	MIL-I-7077
MS28009-2 MS28009-4	FLOURESCENT LUSTERLESS WHITE	250	3-3/4 ± 1/4	MIL-I-6669

BREAK SHARP EDGES APPROX. .010 RADIUS.

DIMENSIONS IN INCHES.

APPROVED 5 JAN. 51 REVISED (A) 29 AUG. 52 (B) 24 June 1963

P.A. Air Force-MAA Other Cust Navy-Wep Army-MO	TITLE INDICATOR - TEMPERATURE, ELECTRICAL RESISTANCE MULTI-FUNCTION, -70 TO +150 C, 2-INCH SIZE	MILITARY STANDARD MS 28009
Procurement Specification SEE TABLE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.