FED. SUP CLASS
4720

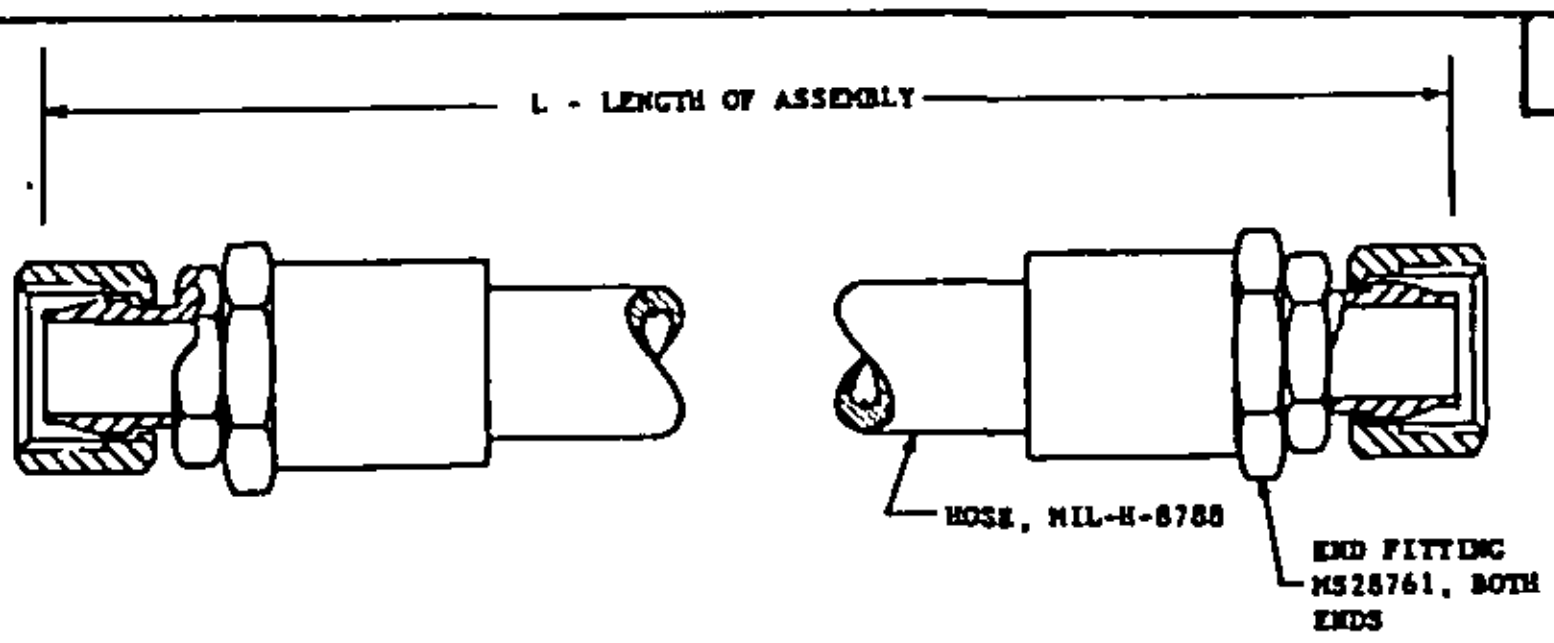

MS ASSEMBLY NO	TUBING OD REF	HOSE ID REF	END FITTING PART NO.
MS28762-4	1/4	7/32	MS28761-4
MS28762-5	5/16	9/32	MS28761-5
MS28762-6	3/8	11/32	MS28761-6
MS28762-8	1/2	7/16	MS28761-8
MS28762-10	5/8	9/16	MS28761-10
MS28762-12	3/4	11/16	MS28761-12
MS28762-16	1	7/8	MS28761-16

Ⓑ

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES IN THE FOLLOWING INCREMENTS:
UNDER 12 INCHES LONG, 1/8 INCH INCREMENTS (TOLERANCE ± 1/8)
12 TO 18 INCHES LONG, 1/4 INCH INCREMENTS (TOLERANCE ± 1/8)
OVER 18 INCHES LONG, 1/2 INCH INCREMENTS (TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4) (TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2) (TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%)

EXAMPLE OF PART NUMBER: MS28762-8-0164 - HOSE ASSEMBLY FOR 1/2 OD TUBING 16-1/2 INCHES IN LENGTH.

- 8 — SIZE
- 016 — INCHES
- 4 — FRACTIONS IN EIGHTHS OF AN INCH.

LENGTH OF ASSEMBLY SHALL BE INDICATED ON DRAWINGS AND PARTS LISTS.

REMOVABLE TAG OR BAND SHOWING MS NUMBER, DATE OF ASSEMBLY, AND MANUFACTURER'S NAME OR TRADEMARK, SHALL BE ATTACHED TO HOSE ASSEMBLY. THIS TAG SHALL BE REMOVED UPON INSTALLATION IN AIRCRAFT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

REVIEW ACTIVITIES:
USAF -85 NAVY -AS
ARMY -MI DSA -CS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 7 Sept 56 REVISED (A) 7 Nov 66 Ⓑ 20 Dec 68

P.A. AIR FORCE -82 Other Cust NAVY - AS ARMY - AV	TITLE HOSE ASSEMBLY, HYDRAULIC HIGH PRESSURE (3,000 PSI) FLARELESS TUBE	MILITARY STANDARD MS28762
Procurement Specification MIL-H-8790	SUPERSEDES MS 28751	SHEET 1 OF 1

DD FORM 1 SEP 61 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:59Z
Check the source to verify that this is the current version before use.