MILITARY SPECIFICATION SHEET

RELAYS, ELECTRICAL, HERMETICALLY SEALED SPDT, LOW LEVEL TO 0.25 AMPERE

Ⓓ INACTIVE FOR NEW DESIGN AFTER 14 December 1984

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the relays described herein shall consist of this specification and the latest issue of MIL-R-5757.


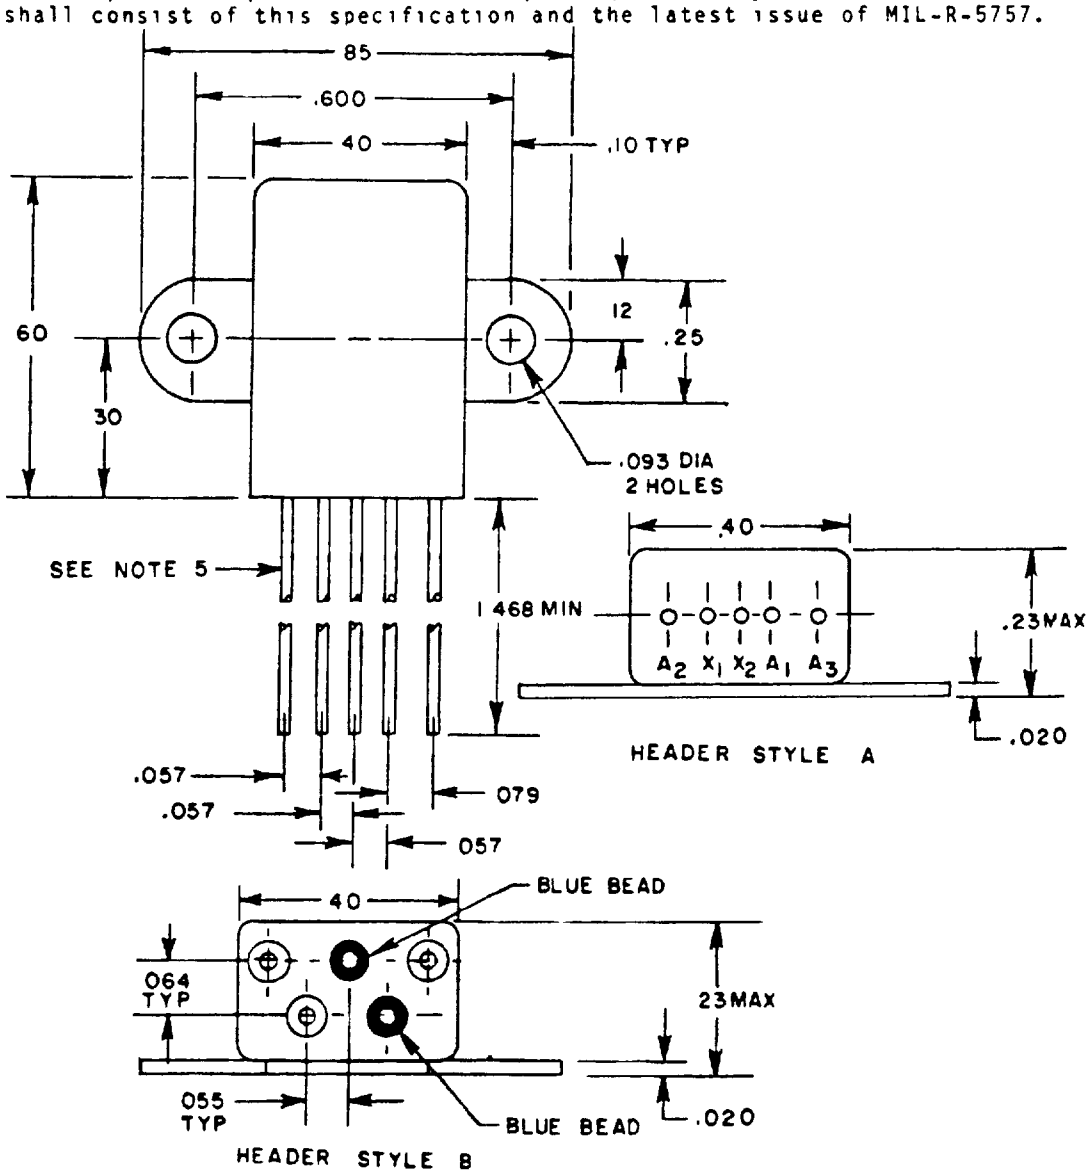


FIGURE 1. Dimensions and configuration.

Ⓓ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:43Z
Check the source to verify that this is the current version before use.

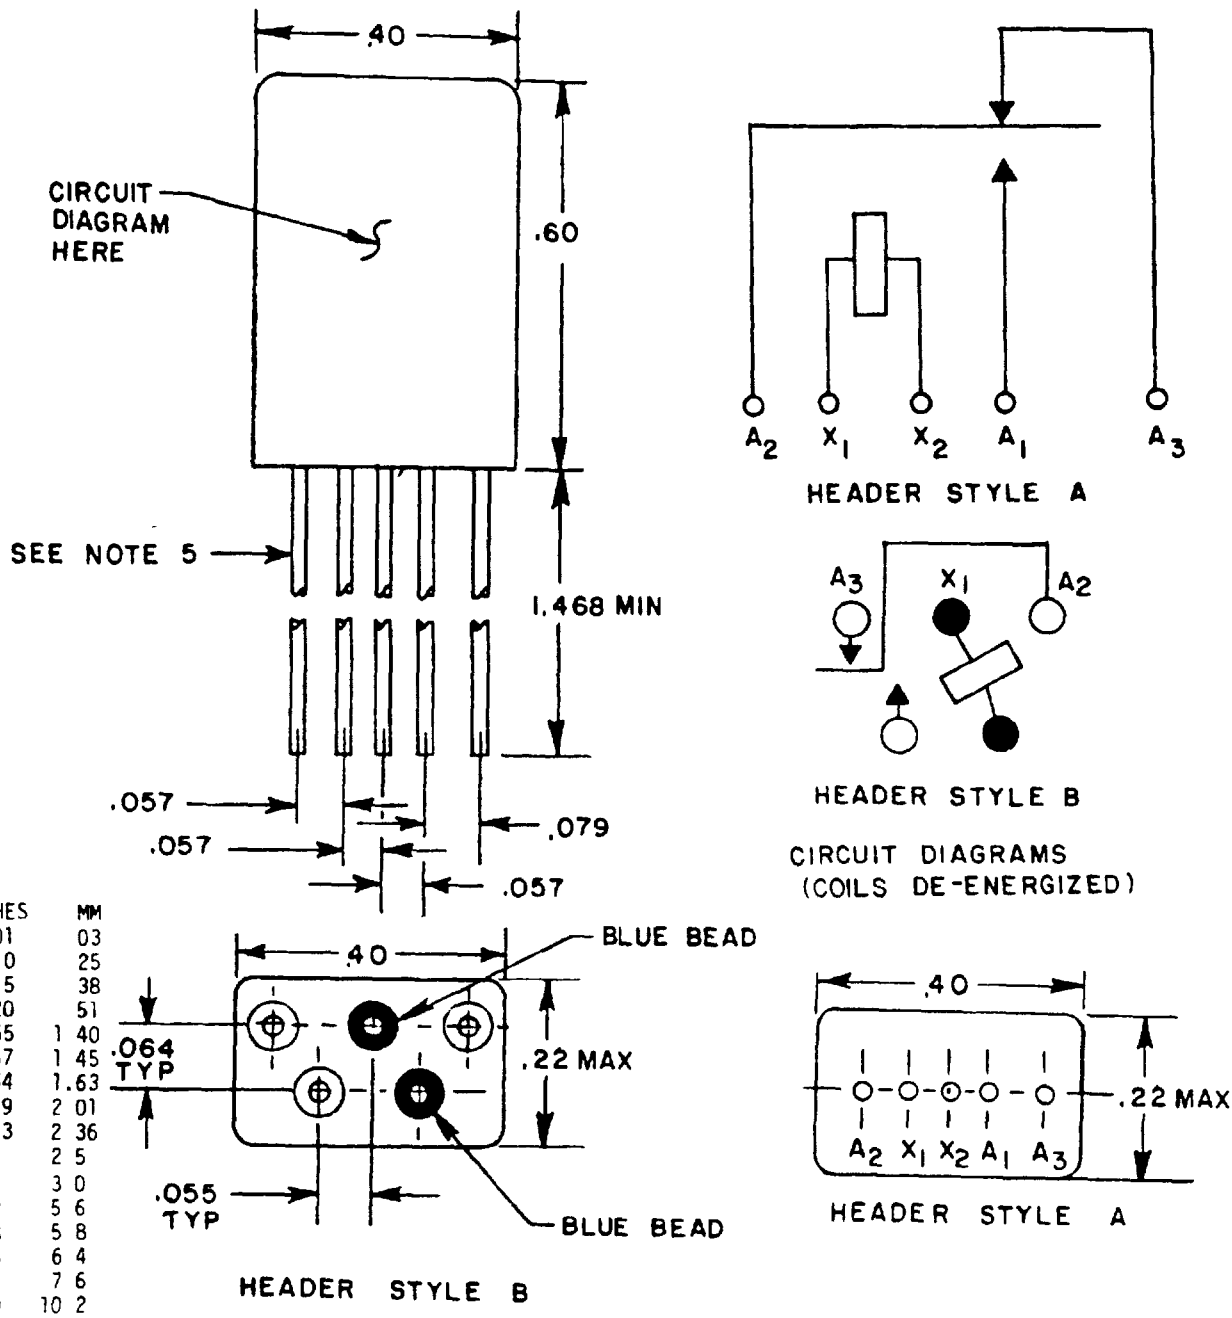

INCHES	MM
001	03
010	25
015	38
020	51
055	1 40
057	1 45
064	1.63
079	2 01
093	2 36
10	2 5
12	3 0
.22	5 6
23	5 8
25	6 4
30	7 6
40	10 2
60	15 2
.85	21 6
1 468	37 29

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.015 (.38 mm) for two place decimals and ±.010 (.25 mm) for three place decimals.
3. Metric equivalents are given for general information only.
4. Terminal numbers need not appear on the relay header provided there is affixed to the relay a suitable legible circuit diagram that identifies each terminal location specified
5. Diameter of header style A leads is .020 ±.001 (.51 ±.03 mm). Diameter of header style B leads is .025 +.002 (.64 ±.05 mm).

FIGURE 1 Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

CONTACT DATA.

Configuration. SPDT.

Arrangement. 1 form C.

Load ratings

High level

Resistive. 0.25 ampere at 28 volts (ac or dc).

Low level. 10 microamperes at 10 millivolts.

Intermediate current Not applicable.

Contact resistance 1/.

Initial 75 milliohms at 5.0 milliamperes - 6 volts maximum.

High level

During life 1.0 ohm maximum at .25 ampere - 28 volts.

After life. 1.0 ohm maximum at .25 ampere - 28 volts maximum.

Low level

During life 100 ohms maximum at 10 microamperes - 10 millivolts.

After life. 1 ohm maximum at 5 milliamperes - 6 volts maximum.

Contact bounce Included in operate and release time measurement.

Overload. Two times rated current.

COIL DATA

Duty rating Continuous.

Maximum voltage See table I.

Rated voltage See table I.

Pick-up-voltage: See table I.

Drop-out voltage. See table I.

Operate and release time 4 milliseconds maximum (including bounce) at 25°C and rated voltage.

ELECTRICAL DATA.

Insulation resistance 1,000 megohms at 25°C, 500 V dc.
100 megohms at 125°C, 500 V dc.

Dielectric withstanding voltage

Sea level 500 ±10 V rms (60 Hz) between all mutually insulated points, except 350 ±10 V rms across open contacts.

Altitude 350 ±10 V rms between terminals.

1/ Measurement shall be made 1.0 inch from header.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:43Z
Check the source to verify that this is the current version before use.

ENVIRONMENTAL DATA

Temperature range Symbol B (-65°C to 125°C)

Vibration Symbol 3 (15G, 10 to 2,000 Hz).

Shock 30G, 11 ±1 milliseconds, (test condition J, method 213, MIL-STD-202) 100 microseconds maximum chatter.

Resistance to soldering heat Applicable.

Acceleration Applicable, except at the 10G level.

Salt spray In accordance with method 101 of MIL-STD-202.

Internal moisture Applicable.

PHYSICAL:

Terminal strength 3 ±0.3 pounds pull.

Seal 2/: 1 x 10^{-8} atm cm^3/s maximum leakage rate.

Dimensions and configuration See figure 1.

Termination Wire lead.

Weight See table I.

LIFE TEST REQUIREMENTS:

Contact life:

High level: 1 million cycles at .25 ampere, 28 volts (ac or dc)

Low level 1 million cycles at 10 microamperes, 10 millivolts (ac or dc), with no misses

Coil life Not applicable

Part number M5757/103- (dash number from table I)

Ⓓ TABLE I. Dash number and characteristics. 1/

Dash number 2	Coil voltage V dc		Mounting configuration	Pick-up voltage (max V dc at 25°C)	Drop-out voltage (V dc at 25°C)	Coil resistance (Ohms ±10 at 25°C)	Weight (max ounces)
	Rated	Max					
001	12	15	No mount	7	5.5 to 0.8	500	0.15
002	12	15	Bracket mount	7	5.5 to 0.8	500	0.18
003	16	21	No mount	10	8.2 to 1.0	1,000	0.15
004	16	21	Bracket mount	10	8.2 to 1.0	1,000	0.18
005	26.5	32	No mount	14	10 to 1.5	2,000	0.15
006	26.5	32	Bracket mount	14	10 to 1.5	2,000	0.18

1/ Each relay possesses high-level and low-level capabilities. Relays tested to high-level characteristics are not recommended for subsequent use in low-level applications.

2/ Original equipment manufacturers should be aware that these dash numbers are produced in either header style, depending upon suppliers, indicated in figure one.

2/ Sealing process may be by soldering, brazing, or welding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:43Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification inspection and sample size.

Single submission	Dash no.	Group submission
12 units plus 1 open unit qualification inspection as applicable	005	12 units plus 1 open unit qualification inspection as applicable
	004	2 units qualification, group 1, also shock, vibration, acceleration, terminal strength, seal and resistance to soldering heat
	001	Qualification inspection group 1

Ⓓ Quality conformance inspection:
Periodic inspection: Group C tests not applicable.

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 99
DLA - ES

User activities
Navy - AS, OS, SH, MC

Agent
DLA - ES

Preparing activity
Navy - EC

(Project 5945-0693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T05:43Z
Check the source to verify that this is the current version before use.