INCH-POUND

MIL-C-50330C (AR)
15 May 1990

MIL-C-50330B (AR)
30 October 1979

MILITARY SPECIFICATION

CONVERTER, DC/DC : 10549021

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available-for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the de/de converter used in Power Supply PP-4812, a part of Radar Set AN/VPS-2. The de/de converter is also used in Subassembly PP6324, part of Radar Test Set AN/TPM-22. The de/de converter provides the necessary voltages for functional operation of the Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue-of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, **General Specification Governing the Manufacture and Inspection of**

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey **07806-5000** by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC **N/A** **FSC** 1285

DISTRIBUTION STATEMENT A. Approved for **public release; distribution** is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-02-21 20:21:12
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-109	-	**Quality** Assurance Terms and Definitions
MIL-STD-810	-	Environmental Test **Methods** and Engineering Guidelines
MIL-STD-2000	-	Standard Requirements for Soldering Electrical and Electronics Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10549021	De/De Converter
10549022	- Converter Assembly runs list, wire

PACKAGING DATA SHEET

PS10549021	Packaging of De/De Converter

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification **shall take precedence.** Nothing In this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10549021, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the de/de converter shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
Part identification and marking
d. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The de/de converter shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to **25** hertz	0.04 inches double amplitude
25 to 40 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling **time** shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-40-10 hertz sweep time is 2 minutes 30 seconds ± 10%.

3.3.2 shock . The dc/dc converter shall not suffer damage and shall meet requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± l0%, 11 milliseconds ± 10%, half--sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The de/de converter shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of **Hg).**

3.3.3.2 Non-operating. The de/de converter shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The dc/dc converter shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 °F and +155 °F.

Source: https://assist.dla.mil. Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.3.4.2 Non-Operating (storage). The de/de converter shall not suffer permanent damage when subjected to the constant temperature extremes of -60°F for a period of **24** hours and +160°F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating) The de/de converter shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical.

3.4.1 Continuity. **Each conductor shall be electrically** continuous **as** specified on the wire runs list of the dc/dc converter, 10549022.

3.4.2 Resistance. Resistance between terminals shall be as listed in Table I.

TABLE 1. Resistance

TERMINALS FROM	TO	RESISTANCE (IN OHMS)
El	E2 (Positive lead)	Less than 10 ohms
El	E3	**Open**
E2	E3	**Open**
J4-1	J4-2	**Short**
J4-1	J4-9	**Short**
J4-3	J4-10	**Short**
J4-3	J4-11	**Short**
J4-4	J4-5	***().65 to 3 Ohms**
J4-4	J4-1	Open
J4-14	J4-15	Short
J4-7	J4-8	Short
J4-12	J4-13	*0.65 to 3 Ohms

Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE I. Resistance (Continued)

TERMINALS FROM	TO	RESISTANCE (IN OHMS)
J4-12	J4-14	Open
J3-1	J3-2	*0.65 to 3 ohms
J3-1	J3-7	Open
J3-3	J3-4	*0.65 to 3 ohms
J3-3	J3-9	Open
J2-1	J2-2	*0.65 to 3 ohms
J2-1	J2-7	Open
J2-3	J2-4	*0.65 to 3 ohms
J2-3	J2-9	Open
J1-1	J1-2	*0.65 to 3 ohms
J1-1	J1-7	Open
J1-3	J1-4	*0.65 to 3 ohms
J1-3	J1-9	Open

*NOTE : The difference in value among any of these eight readings shall not exceed 0.5 ohms.
Open - any reading greater than 10 megohms.
Short - any reading less than .5 ohms.

3.5 Performance. The de/de converter shall produce the outputs given in Table II when loads are applied as specified in Table II and input voltage to the de/de converter is 22 to 30 volts direct current (Vdc).

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or **purchase order, the supplier is responsible for** the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil - Downloaded: 20264O-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE II. Output voltage

TERMINALS FROM(+)	TERMINALS TO(-)	RESISTIVE LOAD OR OUTPUT CURRENT	OUTPUT VOLTAGE	AC RIPPLE	WAVEFORM
J4-1,2,9	J4-3,10,11	10.0 ± 0.3A	36 to 50 Vdc	Spikes equal	N/A
J4-7,8	J4-14,15	3.50 ± 0.15A	9 to 14 Vdc	or less than	N/A
J4-7,8	J4-6	0.1A ± 10%	18 to 28 Vdc	average dc	N/A
J1-6	J1-7	1.00 ± 0.15A	19 to 29 Vdc	output	N/A
J1-8	J1-9	1.00 ± 0.15A	19 to 29 Vdc	voltage	N/A
J2-6	J2-7	1.20 ± 0.15A	26 to 38 Vdc		N/A
J2-8	J2-9	1.20 ± 0.15A	26 to 38 Vdc		N/A
J3-6	J3-7	0.75 ± 0.15A	36 to 53 Vdc		N/A
J3-8	J3-9	0.75 ± 0.15A	36 to 53 Vdc		N/A
J4-4	J4-5	2k ohms	60-90 V p-p	N/A	Square Wave
J4-12	J4-13	2k ohms	60-90 V p-p	N/A	Square Wave
J1-1	J1-2	2k ohms	71.5 ± 12.5 V p-p	N/A	Square Wave
J1-3	J1-4	2k ohms	71.5 ± 12.5 V p-p	N/A	Square Wave
J2-1	J2-2	2k ohms	71.5 ± 12.5 V p-p	N/A	Square Wave
J2-3	J2-4	2k ohms	71.5 ± 12.5 V p-p	N/A	Square Wave
J3-1	J3-2	2k ohms	71.5 ± 12.5 V p-p	N/A	Square Wave
J3-3	J3-4	2k ohms	71.5 ± 12.5 V p-p	N/A	Square Wave

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. **The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.**

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. **First article inspection (see 4.3).**
b. **Quality conformance inspection (see** 4.4)
c* Special sampling inspection (see *4.5).*

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50 deg to +90 deg F.
b.	**Relative** humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

4.3 First article inspection.

4.3.1 First article submission. The requirement for first article and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract and the applicable drawing. The sample for the first article tests shall consist of three de/de converters manufactured in the same reamer, using the same materials, equipment, processes and procedures as in regular production. All Parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.3.1.1 Government testing. When the Government is responsible for conducting first article tests, the contractor, prior to submittind the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements-of the contract and applicable drawings. The contractor shall submit a record of this inspection with the sample including certified test report (CTR) or certificate of conformance (COC) for the materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.3.1.2 Contractor testing. When the Contractor is responsible for conducting first article tests, the sample shall be inspected by the contractor for all the requirements of the contract, all of the examinations and tests specified in Table III (Functional ***Test)*** and Table IV (Special sampling) herein and to all requirements of the applicable drawings. The sample and a record of this inspection, including CTR/COC, shall be submitted for the Government approval. The Government reserves the right to witness the Contractor's inspection.

4.3.2 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed **to** represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one **manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied** to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be Inspected in accordance-with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in **4.4.2.3** shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table III shall be performed on a 100% basis.

TABLE III. Functional tests
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3.4	4.7.2
102.	Performance	3.5	4.7.3
Minor:		None	N/A

4*5 Special sampling. One de/de converter out of the first 50 Produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE IV. Special sampling

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
103.	Vibration	3.3.1	4.7.1.1
104.	Shock	3.3.2	**4.7.1.2**
105.	Altitude	3*3*3	4.7*1*3
106.	Temperature	3.3.4	4.7.1.4
107.	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPS forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the 'Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedure# specified in "Examination" and 'Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus , concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which perminopocceedeceed rejectedt performed to thenahcectimhtshl be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table V shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE V. Test equipment list

ITEM NUMBER	DESCRIPTION
1. Voltmeter	DC, 0-50 v, 1% accuracy, 20,000 ohms/volt or greater.
2. Ammeter	DC, 0-15 A, 1% accuracy.
3. Oscilloscope	Vertical passband: dc to 1 MHz. Horizontal deflection: 5 us/cm. Input sensitivity: 20 rev/cm. Input impedance: 1 megohm.

TABLE V. Test equipment list

ITEM NUMBER	DESCRIPTION
4. Resistive load, fixed	2K ± 10% ohms, 2 W
50 Resistive load, variable	o to *50* ohms, *1000 w.*
6. Resistive load, variable	o to *300* ohms. 100 w.
7. Ohmmeter	To measure less than 0.5 ohm and greater than 10 Megohms with 0.1% accuracy.
8. Power supply	DC, **22-30 V, 20 A, regulated to ± 0.5%**

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8. Procedure 1. of MIL-STD-810 as modified by 3.3.1 herein. In step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The dc/d# converter shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the de/de converter shall be tested as specified in 4.7.2 and 4.7.3. herein to determine compliance with 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. The post test functional check (Step **5 of Procedure I) need not be conducted until completion of all shock impulses.**

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The **maximum** g shall occur **at** 5.5 milliseconds ± 10%.

d. Th% shock measuring system shall have a flat frequency response within ± 10% **from 20 to 2,000 hertz.**

After the application of all the shock impulses, the de/de converter shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating) This test shall be performed as specified in Procedures II and III, Method 500.2 of MIL-STD-810 . The-operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.104.1 High (operating and non-operating) This test shall be performed as specified in Procedures I and II, Method 501.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating) . This test shall be performed as specified in Procedures I and II, Method 502.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating) This test shall be performed in accordance with Procedure III, Mehtod 507.2 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.7.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.2 Electrical.

4.7.2.1 Continuity. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

4.7.2.2 Resistance. Resistance shall me measured with an ohm-meter (Table V, item 7) for compliance with 3.4.2.

4.7.3 Performance. The selected de/de converters shall be tested as follows: Apply 24 $^{+6}_{-2}$ vdc to the unit under test using power supply (Table V, item 8), as shown in Figure 1. Use the test equipment as shown in Figure 1 for verification of the square wave outputs as listed in Table II. Use the test equipment as shown in Figure 2 for verification of the dc outputs listed in Table II. Adjust variable resistors (Table V, items 5 and 6) to set the output currents of Table II.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 as specified in paragraph 3.7.

Source: https://assist.dla.mil. Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.


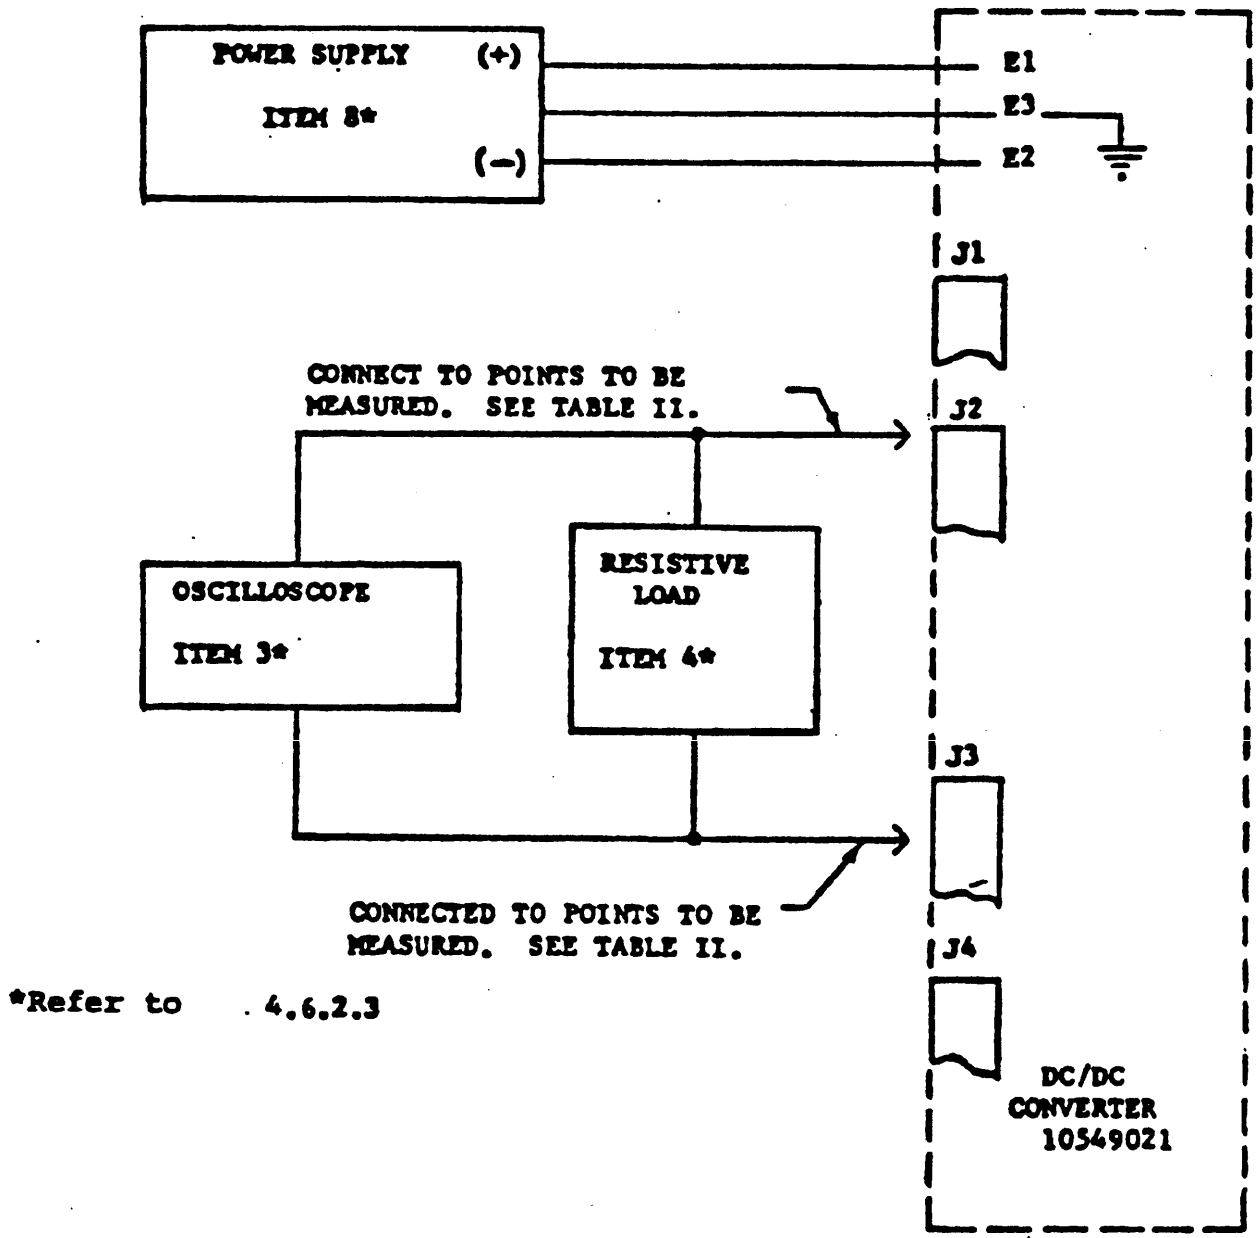


FIGURE 1. Dc/dc converter test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:21Z
Check the source to verify that this is the current version before use.

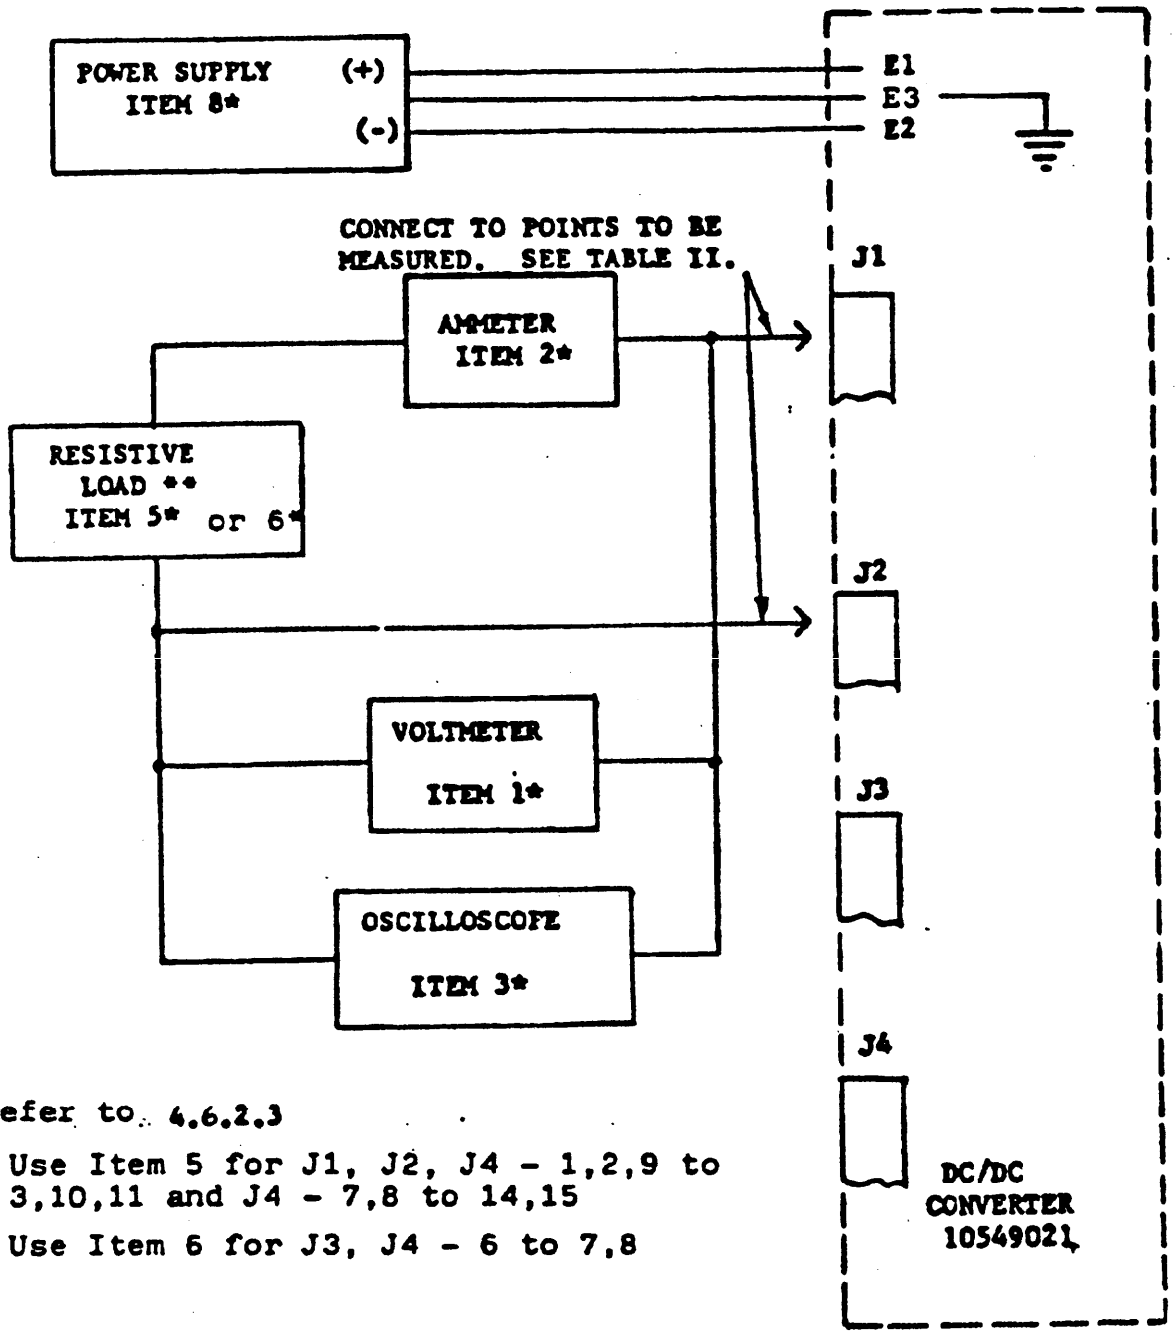

*Refer to 4.6.2.3

** Use Item 5 for J1, J2, J4 - 1,2,9 to 3,10,11 and J4 - 7,8 to 14,15

Use Item 6 for J3, J4 - 6 to 7,8

FIGURE 2. Dc/dc converter test setup.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:21Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS10549021. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The output voltages of the de/de converter are used to provide the unregulated voltages to the voltage regulators used in the 5A3 assembly, 10549013 PP4812, part of Radar Set AN/VPS-2, The de/de converter is also used in Test Set Subassembly MX8041, part of Test Set AN/TPM-22. In the test set it is used to check voltage regulator performance of Radar Power Supply PP4812, part of Radar Set AN/VPS-2.

6.2 Acquisition Requirement. procurement documents shall specify the following:

6.2.1 Procurement requirements.

Title, number and date of this specification.
b. Applicable stock number.
c. First Article Sample requirements.
d. Packaging requirements, 'if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot of shipment or product.

6.3 Submission of contractor Inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Converter
De/de Converter
Fire Control System
Power Supply Subassembly PP4812/VPS-2
Radar Set AN/VPS-2
Radar Test Set AN/TPM-22
Test Set Subassembly MX8051/TPM-2
Vads

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A697)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-50330C (AR)	15 May 1990

3. DOCUMENT TITLE

CONVERTER, DC/DC: 10549021

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US Army ARDEC Standardization & Specification Office	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S/Bldg 6 Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete* 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T20:21Z
Check the source to verify that this is the current version before use.