MIL-C-60226(MU)
AMENDMENT 3
5 February 1968
SUPERSEDING
AMENDMENT 2
2 September 1966

MILITARY SPECIFICATION

CASE, BATTERY COMMAND PERISCOPE: M165

This amendment forms a part of Military Specification MIL-C-60226(MU), dated 7 May 1965.

Paragraph 2.1: Add: "MIL-B-23362-Brazing of Aluminum and Aluminum Alloys"; Delete "A10533221" and substitute "A10547130".

Paragraph 3.3.3, 4th sentence: Delete and substitute: "The upper and lower extrusions shall be joined by butt welding or brazing which shall be ground smooth and exhibit soundness of good practices conforming to MIL-W-8604 or MIL-B-23362".

Paragraph 3.3.7: Delete 2nd sentence and substitute the following:

"The gasket shall be formed by molding, vulcanizing or butt bonding. Butt bonding the ends of the gasket shall be with adhesive conforming to MIL-A-5092, Type II."

Paragraph 3.3.8.1: Delete "A10533221" and substitute "A10547130".

Paragraph 3.3.9: Add the following sentence: "Slight distortion of sealing extrusion, localized about centerline of clasp assembly is permissible provided the case meets the requirements of 3.7.3 and 3.7.4."

Paragraph 4.6.1: Delete "Table II, Class b" and substitute "Table III, Method b."

Figures 3 and 4, Suggested Material Sources: Delete "Part No. R40-1211-CPA-1492: and substitute "Part No. R40-4313-CPA-1492."

Figures 3 and 4, Suggested Material Sources: Delete "Boltaron Series 6000-X4043 and substitute "Boltaron Series 6000-X4451."

* Delete: "Figures 1, 6, 7 and 8" and substitute attached "Figures 1, 6, 7 and 8."

* The outside margin has been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous amendment.

Custodian:

Army - MU


Preparing activity:

Army - MU


Project No. 1240-A064

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:20Z
Check the source to verify that this is the current version before use.

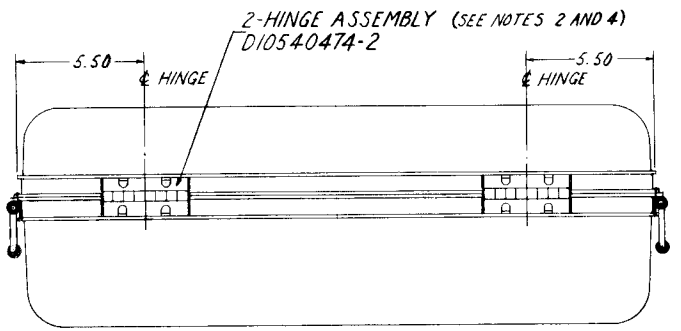


REAR VIEW

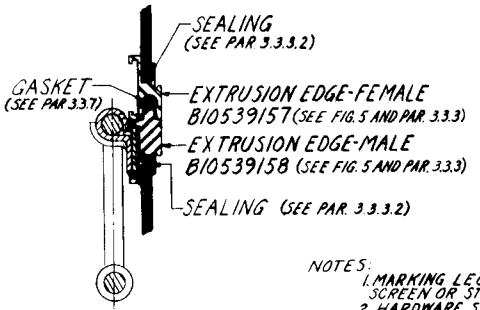


SECTION A-A

NOTES:
1. MARKING LEGEND SHALL BE APPLIED BY SILK SCREEN OR STENCIL AS SPECIFIED IN PAR. 3.5.
2. HARDWARE SHALL BE INSTALLED IN RELATIVE POSITION AND PERMANENTLY ATTACHED TO EDGE FRAME AS SHOWN ON FIGURE 2.
3. ALL PRODUCTION CASES SHALL BE TESTED FOR BEING WATER TIGHT IN ACCORDANCE WITH PAR 3.7.4.
4. PEEN OR STAKE EACH END OF HINGE PIN.
5. TOLERANCE:
DECIMALS ±.06

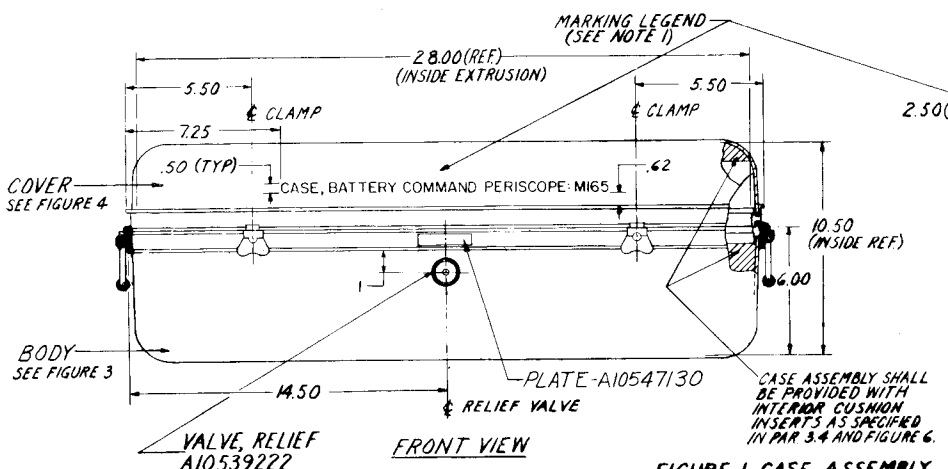

FRONT VIEW

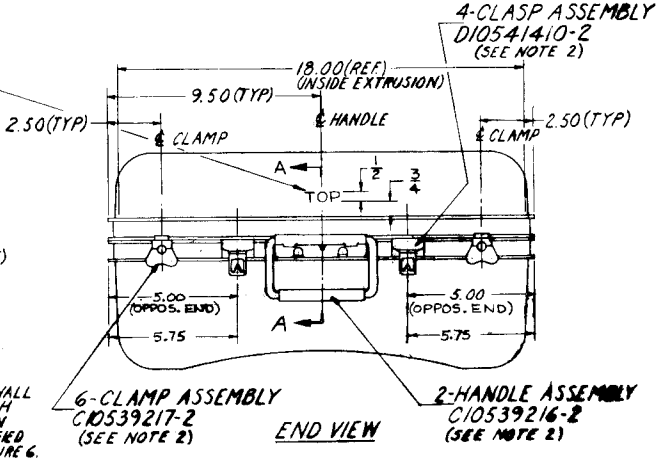

END VIEW

FIGURE 1-CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:20Z
Check the source to verify that this is the current version before use.

NOTE:
1. CUSHION INSERTS SHALL BE BONDED IN RELATIVE POSITIONS AS SHOWN WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II


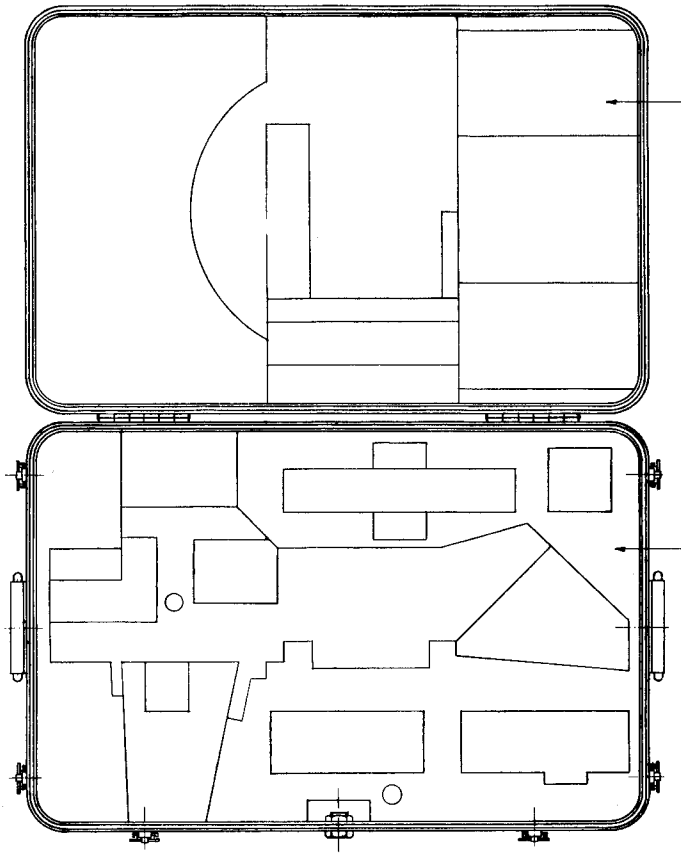


FIGURE 6-INTERIOR CUSHION ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:20Z
Check the source to verify that this is the current version before use.

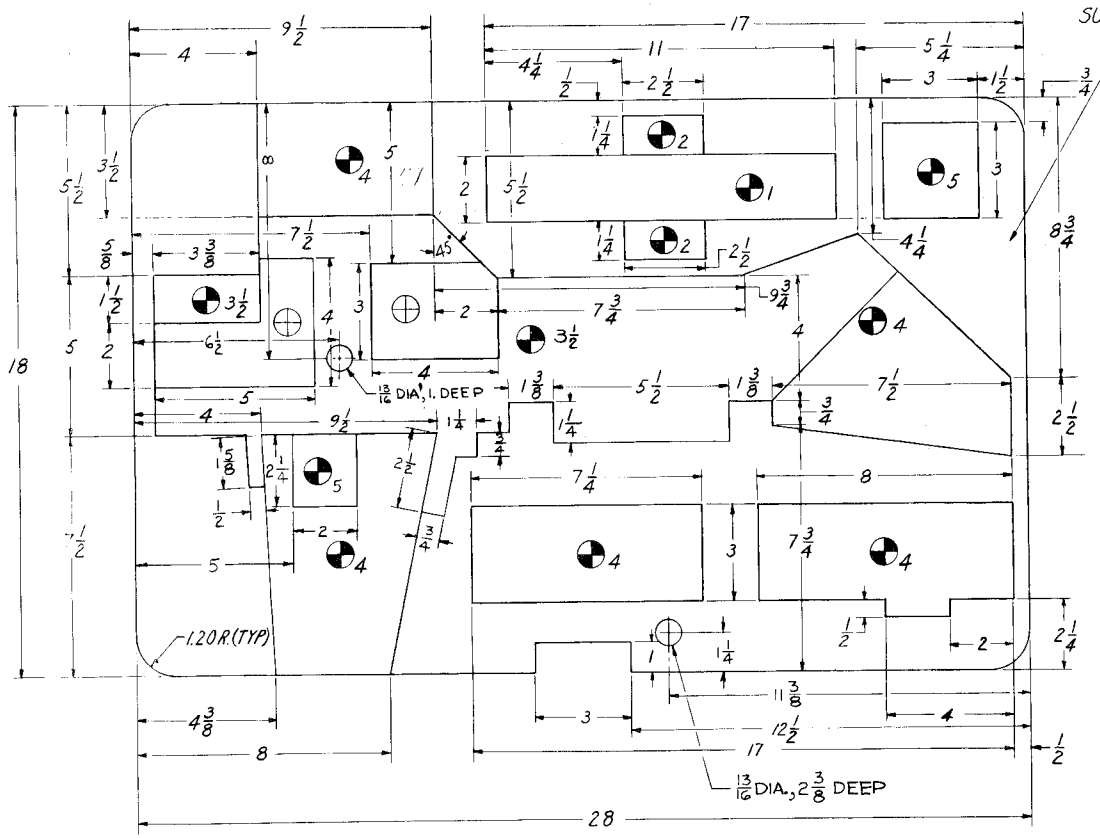

PLAN VIEW


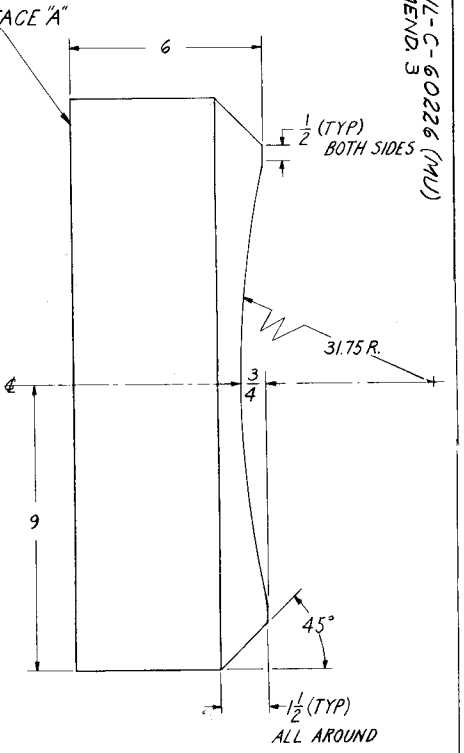


FIGURE 7 - LOWER CUSHION INSERT

NOTES:
1. DIMENSIONS MARKED WITH ⊕ ARE DEPTH DIMENSIONS TAKEN FROM SURFACE "A."
2. AREA MARKED ⊕ ENTIRELY CUT OUT.
3. CUSHION INSERT SHALL BE FABRICATED OF POLYETHYLENE FOAM - 2 LBS/CUBIC FOOT DENSITY. COLOR CHARCOAL.
4. INSERT SHALL BE FABRICATED BY FUSION BONDING WITH HEAT APPLICATION.
5. TOLERANCE: FRACTIONS ± 1/16
ANGLES ± 1°

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:20Z
Check the source to verify that this is the current version before use.

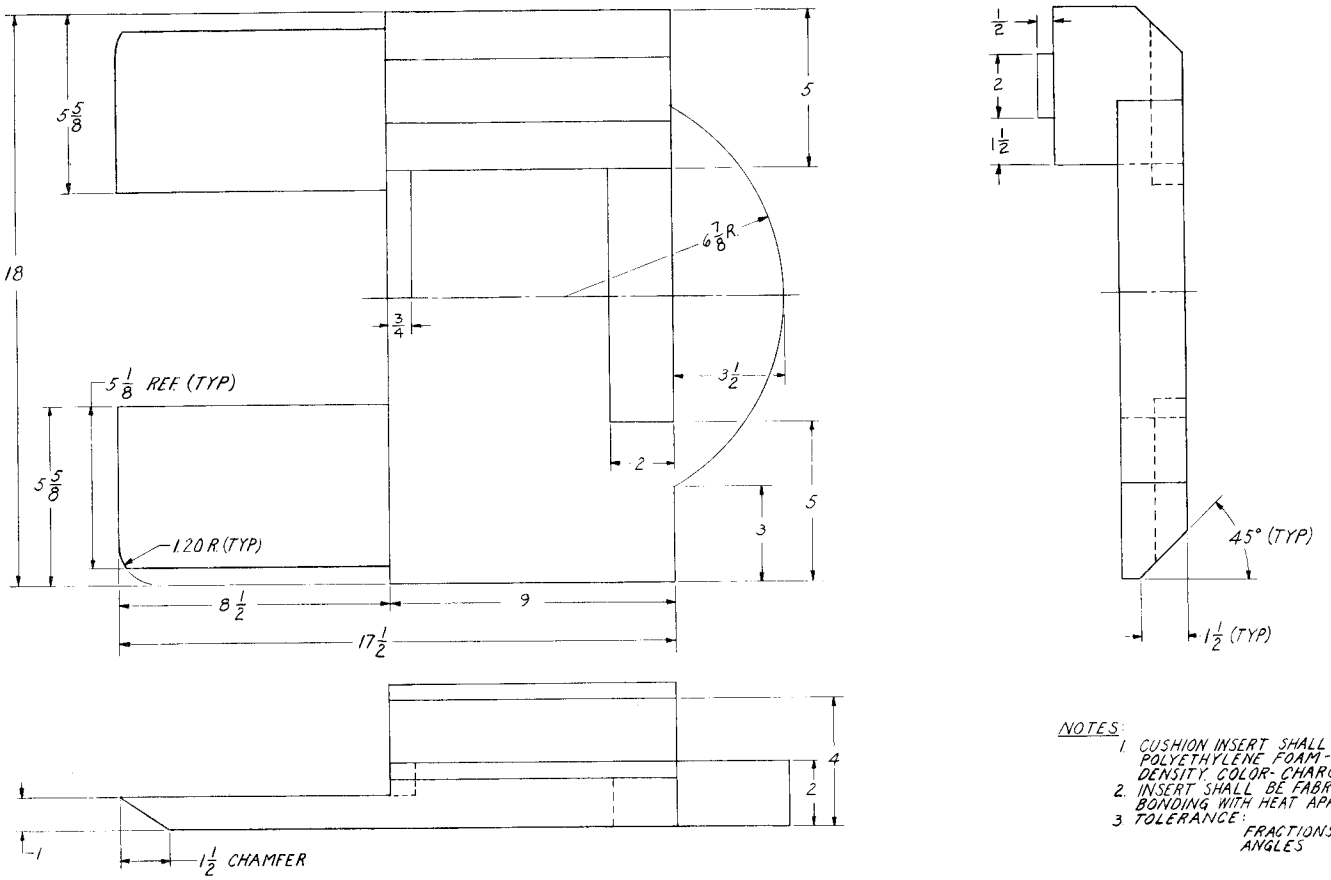

NOTES:

1. CUSHION INSERT SHALL BE FABRICATED OF POLYETHYLENE FOAM - 2 LBS/CUBIC FOOT DENSITY. COLOR - CHARCOAL.
2. INSERT SHALL BE FABRICATED BY FUSION BONDING WITH HEAT APPLICATION.
3. TOLERANCE:
   FRACTIONS ± 1/16
   ANGLES ± 1°

FIGURE 8 - CUSHION HOLD DOWN

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:20Z
Check the source to verify that this is the current version before use.