INCH-POUND

MIL-DTL-48568D
w/Amendment 1
17 December 2003
SUPERSEDING
MIL-DTL-48568D
24 May 1996

DETAIL SPECIFICATION

CATAPULT, AIRCRAFT EJECTION SEAT, CKU-7/A ASSEMBLY

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the CKU-7/A Rocket Catapult.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-S-9479	Seat System, Upward Ejection, Aircraft, General Specification for
MIL-P-46994	Pellet, Boron Potassium Nitrate

Comments, suggestions, or questions on this document should be addressed to Commander, Indian Head Division, Naval Surface Warfare Center, Technical Information Branch (Code 4230), 101 Strauss Avenue, Indian Head, Maryland 20640-5035, or emailed to pennlf@ih.navy.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil.

AMSC N/A FSC 1377

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

MIL-P-82680	Propellant, Solid, Composite
MIL-P-82683	Propellant, Solid, Composite

STANDARDS

MILITARY

MIL-STD-413	Visual Inspection Guide for Elastomeric O-rings
MIL-STD-414	Sampling Procedures for Inspection by Variables
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1168	Ammunition Lot Numbering
MIL-STD-1907	Inspection, Liquid Penetrant and Magnetic Particle, Soundness Requirements for Materials, Parts, and Weldments
DOD-STD-2101	Classification of Characteristics
MIL-STD-2102	Aircrew Escape Propulsion Systems; Vibration and Shock Tests for
MS17983	Compass, Magnetic, Pilots Standby

(Unless otherwise specified, copies of federal and military specifications and standards are available from Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

Naval Surface Warfare Center, Indian Head Division (CAGE Codes 19200 and 19203)

DL11820361	Catapult, Aircraft Ejection Seat, CKU-7/A Assembly

(Application for copies should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Attn: Data Control Branch (Code 8410), Indian Head, MD 20640-5035.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

listed in the issue of DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

E 1444 Standard Practice for Magnetic Particle Examination

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN SOCIETY FOR QUALITY CONTROL

ANSI/ASQC Z1.4 Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American Society for Quality Control, PO Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 53201-4606.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in libraries or other informational services.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.3.

3.2 Materials. All materials, parts, and assemblies shall be in accordance with DL11820361 and this specification.

3.2.1 Primary components. Only primary components from a single primary component lot shall be used in a production lot of loaded rocket catapults.

3.2.2 Propellant. The rocket motor propellant shall be in accordance with MIL-P-82680, Class I.

3.3 Age of explosive components. The following paragraphs give the requirements for controlling the age of explosive components.

3.3.1 Propellant. The propellant is defined as the rocket motor grain (sleeve and grain assembly per Drawing 11820365) and the cartridge grain (cartridge grain assembly per Drawing 10534739). For purposes of this section, loaded is defined as when the rocket catapult lot is released for lot acceptance testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

3.3.1.1 Rocket motor grain. The rocket motor grain shall be loaded within 360 days of the oldest rocket motor propellant mix.

3.3.1.2 Cartridge grain. The cartridge grain shall be loaded within 180 days of the oldest cartridge propellant mix.

3.3.2 Other explosive components. The other explosive components are the percussion primer (Drawing 11820864) and the $BKNO_3$ pellets (MIL-P-46994, Type II-A).

3.3.2.1 Percussion primers. The percussion primers shall be loaded within 24 months of manufacture and certification or within 12 months of recertification. Loaded is defined as when the cartridge case is crimped onto the cartridge head assembly.

3.3.2.2 $BKNO_3$ pellets. The $BKNO_3$ pellets shall be loaded into the cartridge head assembly within 12 months of the certification date. Loaded is defined as when the rocket catapult lot is released for lot acceptance testing.

3.4 Performance and product characteristics. The rocket catapults shall meet the following performance and product characteristics when test fired at –65, 70, and 165°F using an ejected weight of 459 pounds. The rocket angle shall be set at 40 degrees (see Drawing 11820363).

3.4.1 Ballistics. The rocket catapults shall meet the ballistic requirements specified in table I.

3.4.1.1 Other requirements. In addition to meeting the ballistic requirements, none of the following shall occur during test firing of rocket catapults:

a. No unit component, including but not limited to catapult components, O-rings, springs, or pieces of propellant shall be ejected. The only exceptions are small pieces of the cartridge grain ABS tubing that are regularly ejected after rocket motor separation.

b. No component subject to loading shall fail.

c. No excessive nozzle erosion, hot spots, or burnthrough shall occur.

d. No leakage of ballistic gas past a sealing surface, except for nozzle/retainer interface O-ring, shall occur.

3.4.2 Initiation. Initiation input for test is 1,100 psi pressure source producing a 30,000 to 50,000 psi per second positive rate of change.

3.5 Torque. The booster tube (Drawing 10551422) and head (Drawing 10551412) assembly and the launcher tube (Drawing 10551423) and mount (Drawing 10551413) assembly, when seated with a torque of 400 +50, –0 inch-pounds, shall not be loosened or deformed when subjected to a breakaway torque of 200 inch-pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.


TABLE I. Ballistic performance requirements for a 459-pound ejected weight.

Parameter	–65 ± 2°F		70 ± 2°F		165 ± 2°F	
	Min	Max	Min	Max	Min	Max
Catapult						
Initiation pressure, P_{act} (psi)	250	550	250	550	250	550
Rate of change of acceleration, ΔA (g/sec), see 6.3.5	--	300	--	300	--	300
Separation velocity[1/], CSv (ft/s), see 6.3.4	37	--	40	--	42	--
Ignition delay, CId (ms), see 6.3.2	--	30	--	30	--	30
Axial thrust, CFmax (lb_f), see 6.3.11	--	7000	--	7000	--	7300
Launch time, CLt (ms), see 6.3.3	--	210	--	200	--	200
Dynamic response index, DRI, see 6.3.10	--	18	--	18	--	22
Acceleration, A (g), (reference)[3/]	--	20	--	18	--	20
Rocket Motor						
Resultant impulse, RIr (lb_f/sec), see 6.3.9	1100	--	1100	--	1100	--
Ignition delay, RId (ms), see 6.3.6	--	25	--	25	--	25
Action time, RAt (ms)[2/], see 6.3.7	--	550	--	450	--	450
Resultant thrust, RFmax (lb_f), see 6.3.8	--	7350	--	7350	--	7600
Thrust angle (reference)[3/]	40°		40°		40°	

1/ Nominal separation velocities are: 39.0 ft/s at -65 °F and 47.0 ft/s at 165°F.
2/ Nominal rocket motor action time is: 460 ms at -65°F and 330 ms at 165°F.
3/ Record for information only.

3.6 Residual magnetism. The rocket catapult assembly, when passed in front of an MS17983 compass along the entire length of the catapult (see figure 1) shall not cause the compass indicator to deflect more than 5 degrees in either direction. The test shall be performed in an area free from local magnetic effects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

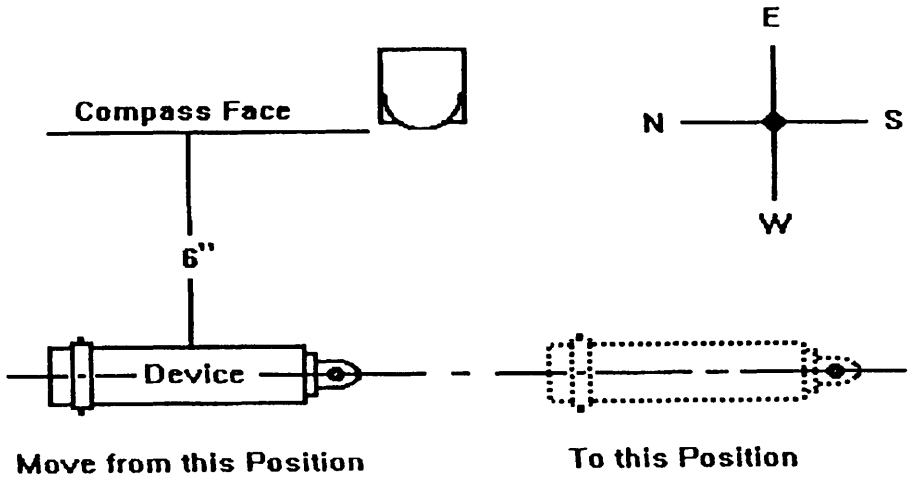

Plan View

NOTE: Device and compass shall lie in a common horizontal plane

FIGURE 1. Layout for determination of residual magnetism in device.

3.7 Nozzle O-ring integrity. The nozzle ball/retainer O-ring shall not show any leakage throughout the operational range of the swivel nozzle when pressurized to 40 psig. Application of the 40-psig internal pressure to the sealed nozzle/retainer/sleeve assembly shall cause the nozzle to rotate fully.

3.8 Release O-ring integrity. The release O-rings shall show no indications of leakage when the launcher tube/mount assembly is pressurized to 200 psig.

3.9 Nozzle/sleeve actuation force. The force required to move the sleeve an adequate distance to cause full rotation of the nozzle in a complete nozzle/retainer/sleeve assembly shall not exceed 25 lb_i.

3.10 Protective finish. Protective finish shall be in accordance with the applicable specifications and drawings and shall apply to all surfaces of the component regardless of configuration.

3.11 Radiographic. Each loaded rocket catapult shall be examined radiographically to ascertain the presence, condition, and correct placement of internal components.

3.12 Hydrostatic pressure. The components listed in table II shall withstand the internal hydrostatic pressure specified for 15 seconds minimum when tested in accordance with 4.4.6.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

TABLE II. Hydrostatic pressure requirements.

Component	Drawing	Hydrostatic pressure (psi)
Motor Tube	10551424	5,000
Launcher Tube	10551523	11,000
Booster Tube	10551422	11,000

3.13 Environmental. The rocket catapult assemblies shall withstand the environmental conditioning of 3.13.1 through 3.13.4. Rocket catapult assemblies subjected to this conditioning shall show no evidence of deterioration of propellant or disarrangement of components when examined in accordance with 4.4.6.1 and shall meet the ballistic performance requirements of 3.4 when test fired in accordance with 4.3.2.

3.13.1 High temperature. The rocket catapult shall withstand the high temperature test of 4.3.1.1.

3.13.2 Vibration. The rocket catapult shall withstand the vibration test of 4.3.1.2.

3.13.3 Temperature shock. The rocket catapult shall withstand the temperature shock test of 4.3.1.3.

3.13.4 Thirty-day storage test. The rocket catapult shall withstand the 30-day storage test of 4.3.1.4.

3.14 Identification markings. Each rocket catapult shall be marked in accordance with Drawing 11820361 with an identification label, a warning label, and an installation label.

3.14.1 Production lot designation. The production lot number shall follow MIL-STD-1168. The construction of the lot number shall be as follows:

XXX	95	D	002	-007
a	b	c	d	e

Where:

a = Manufacturer's identification code.
b = The year of manufacture of the oldest batch of cartridge propellant in the lot.
c = The month of manufacture of the oldest batch of cartridge propellant in the lot expressed as an alpha code in accordance with 4.1.3 of MIL-STD-1168.
d = Lot interfix number (controlled by Indian Head Division, Naval Surface Warfare Center, Code 5120, Indian Head, MD 20640-5000 or contracting activity).
e = Lot sequence number - lot number (manufacturer is responsible for the assignment of lot numbers.

3.15 Workmanship. The workmanship shall be that required by the applicable drawings, referenced specifications, and the best industrial practices governing the quality production of interchangeable parts for maintaining the dimensions, finishes, tolerances, and quality specified herein. All components and assemblies shall be free from burrs, contamination, corrosion, sharp edges, or foreign material which could result in malfunction of the unit or components, or be a safety hazard in handling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections.

a. First article inspection (see 4.3)
b. Conformance inspection (see 4.4)

4.2 Inspection conditions. Unless otherwise specified in the contract or purchase order (see 6.2), inspection conditions shall be as follows:

a. Temperature: Room ambient 65 to 95°F
b. Altitude: Normal ground
c. Vibration: None
d. Humidity: Room ambient to 95 percent relative, maximum

4.3 First article inspection. Unless otherwise specified in the contract or purchase order (see 6.2), a first article sample shall consist of three blocks of cured propellant, two sleeve and grain assemblies, and eighteen loaded catapult assemblies. The rocket catapult assemblies shall be adapted for pressure transducers (see 6.7) and all first article samples shall be manufactured using the same methods and procedures proposed for production. The first article samples shall be subjected to the tests of 4.4, with the exception of the test firing of 4.4.5, followed by environmental testing, radiographic examination, and static firing in the sequence specified in table III. Acceptance of the first article sample shall be based on no defects in the sample. Any production of the rocket catapult assemblies by the contractor prior to approval of the first article samples shall be at the contractor's risk. First article samples shall not be included as part of the quantity specified for delivery in the contract (see 6.2).

TABLE III. First article evaluation test program.[1/]

Test Para.	Test	Unit Number																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
4.4.6.1	Radiographic insp.	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a
4.3.1.1	High temperature	b	b	b	b	b	b												
4.3.1.2	Vibration -65°F							b	b	b									
4.3.1.2	Vibration 165°F										b	b	b						
4.3.1.4	30-day storage -65°F													b	b	b			
4.3.1.4	30-day storage 165°F																b	b	b
4.4.6.1	Radiographic insp.	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c
4.3.1.3	Temperature shock	d	d	d	d	d	d	d	d	d	d	d	d						
4.4.6.1	Radiographic inspection	e	e	e	e	e	e	e	e	e	e	e	e						
4.3.2	Ballistic test -65°F	f	f					f			f			d			d		
4.3.2	Ballistic test 70°F			f	f				f			f			d			d	
4.3.2	Ballistic test 165°F					f	f			f			f			d			d

1/ Letters denote sequence of testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.3.1 Environmental tests.

4.3.1.1 High temperature. The rocket catapult assembly shall be subjected to the high-temperature storage test in accordance with Method 501 of MIL-STD-810. The test items will be maintained at 165°F for 50 hours minimum. Operation of the rocket catapult shall be only as specified in table III.

4.3.1.2 Vibration. The rocket catapult assembly shall be subjected to random vibration for jet aircraft in accordance with MIL-STD-2102 with the exception that the duration will be for 6 hours, with 2 hours on each axis. Before vibration, units shall be temperature conditioned in accordance with table III for a minimum of 8 hours. The input vibratory acceleration must have a W_o factor of 0.1 g^2/Hz and the reduction factor must be 0 g^2/Hz-dB. If the rocket catapult must be removed from the environmental conditioning chamber or if the temperature falls outside the specified temperature limits for more than 5 minutes, the testing will be stopped and the unit reconditioned. A reconditioning time of 2 minutes for every minute outside the specified temperature envelope is required. A continuous temperature history of the unit will be kept for all conditioning and testing time. Unless otherwise noted, the rocket catapult must be mounted on a text fixture in a manner that will simulate actual seat/aircraft installation and excited through the attachment fittings.

4.3.1.3 Temperature shock. The rocket catapult assembly will be subjected to the temperature shock test in accordance with Method 503 of MIL-STD-810. The test temperature extremes will be –65°F and 165°F and the duration of exposure at each temperature shall be 8 hours. Operation of the rocket catapult shall be only as specified in table III.

4.3.1.4 Thirty-day storage. Three rocket catapults shall be placed in storage at –65°F and three at 165°F for 30 days each. Ensure that the proper temperature is maintained throughout storage. Operation of the rocket catapult shall be only as specified in table III.

4.3.2 Static firing test. Within 30 days after completion of environmental exposure the rocket catapults must be static fired at the Indian Head Division, Naval Surface Warfare Center, Indian Head, MD 20640-5000. The sample shall be temperature conditioned per table III for a minimum of 8 hours and test fired within 10 minutes after removal from the conditioning chamber to verify conformance to the requirements of 3.4. Data specified in table I shall be analyzed in accordance with MIL-STD-414, Section B, Part I, using the procedures of B-5 through B-7. Nonconformance with table I, or any requirement of 3.4.1.1, shall be cause for rejection of the first article sample.

4.3.3 Propellant aging. Three blocks of cured propellant from each batch of propellant used in the first article sample shall be submitted for aging testing to the Indian Head Division, Naval Surface Warfare Center, Indian Head, MD 20640-5000, Attn: Code 5120. High-temperature aging shall be conducted for 84 days with an atmosphere of 22 percent relative humidity and at 165 ± 5°F. At zero time and at the end of the 28-, 56-, and 84-day aging, physical properties shall conform to MIL-P-82680, Class I. The rate for stress/strain determination shall be 2.0 inches/minute. The sample shall be cast into rectangular cardboard containers approximately 1.5 inches high by 8 inches wide by 11 inches long. All samples submitted shall be bare propellant, individually wrapped in moistureproof packaging and properly identified as to propellant lot and batch number. Failure of the propellant to meet the requirements of MIL-P-82860, Class I, shall be cause for rejection of the propellant batch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.3.4 Propellant morphology. Two sleeve and grain assemblies from each batch of propellant used in the first article sample shall be submitted for morphological examination to the Indian Head Division, Naval Surface Warfare Center, Indian Head, MD 20640-5000, Attn: Code 5120. All samples shall be individually wrapped in moistureproof packaging and properly identified as to propellant lot, batch number, and grain serial number. These tests shall be used as the baseline information.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the examinations and tests of 4.4.4 through 4.4.6, conducted on samples selected as specified in 4.4.2. The contractor is responsible for assuring that all rocket catapults offered for acceptance meet all requirements of the applicable drawings and specifications. Items of inspection shall be serialized and inspection data traceable to a specific serial number.

4.4.1 Test reports. When specified in the contract or order (see 6.2), the contractor shall furnish test reports to the contracting activity. Test reports shall include the following information as described in 4.4.1.1 through 4.4.1.6:

a. Propellant description (see 3.2.2)
b. Static firing performance test results (see 4.4.5.1)
c. Summary sheet
d. Ammunition data cards
e. Propellant/assembly production records
f. Certification of age of explosive components and propellant (see 3.3)

4.4.1.1 Propellant description. The following propellant information shall be submitted with each production lot. The materials and components of each propellant batch shall be listed along with the manufacturer, lot number, and date of manufacture. The burning rates at 1000, 2000, 3000, 4000, and 5000 psi performed at –65, 70, and 165°F for each pressure (three samples at each temperature and pressure per batch) for the cartridge grain and at 1500, 2000, 2500, 3000, 4000, and 5000 psi performed at –65, 70, and 165°F for each pressure (three samples at each temperature and pressure per batch) for the rocket motor grain shall also be included. In addition, include the results of tensile strength and elongation tests at –65, 70, and 165°F with a pull rate of 2 inches/minute (five samples at each temperature per batch), heat of explosion (three samples per batch), and verification that ingredients were properly weighed and added to each batch (mix sheet).

4.4.1.2 Static firing performance tests. All computations and data required for ballistic evaluation generated during quality conformance inspection static firing per 4.4.5 (Government) and 4.4.5.1 (contractor) shall be reported, including firing traces. The following information shall also be listed:

a. Grain designation, manufacturer, lot number, and date of manufacture
b. Type of test equipment
c. Deviations from standard testing procedures
d. Additional comments (malfunctions, unusual occurrences)
e. Disassembly findings report (see 4.4.5.2)

4.4.1.3 Summary sheet. A summary of the results of the inspections required by 3.5 through 3.12 shall be submitted to the designation Government activity for each inspection lot. The summary shall include the sample size, number and nature of defects found, and the disposition (accepted or rejected).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.4.1.4 Data cards. Data cards (DD Form 1650) shall be completed for each loaded rocket catapult lot. Copies shall be provided in accordance with contract requirements and one copy shall be forwarded to: Commander, Indian Head Division, Naval Surface Warfare Center, Indian Head, MD 20640-5000, Attn: Code 5120.

4.4.1.5 Propellant/assembly production records. The contractor shall prepare and retain for the service life of the unit propellant production records including all propellant batch numbers and designations, rocket motor lot number, rocket motor serial number, cartridge lot number, and cartridge serial number. The records shall be cross referenced to the assembled rocket catapult lot number and to specific rocket catapult serial numbers.

4.4.1.6 Age certification. A certification of the age of explosive components and propellants shall be furnished by the contractor to show compliance with 3.3.

4.4.2 Sampling for quality conformance inspection.

4.4.2.1 Lot. For the purpose of identification, inspection, and shipment, a lot of loaded assemblies shall consist of 420 assemblies, maximum, inclusive of test samples. The homogeneity of inspection lots shall be maintained by having:

a. Components produced by homogeneous process
b. Units loaded with same lot of rocket motors (see 6.3.14) and the same lot of catapult cartridges

4.4.2.2 Sampling for examination. Designation of defects (critical, major, or minor) shall be in accordance with MIL-STD-2101.

a. Critical and major defects: Each rocket catapult assembly (Drawing 11820361) shall be examined for all critical and major defects (see 4.4.4.1 for accept and reject criteria.)

b. Minor defects: Unless a specific contractor-generated inspection plan has been approved by the contracting activity, sample rocket catapult assemblies (Drawing 11820361) shall be selected for examination in accordance with general inspection level II of ANSI/ASQC Z1.4, AQL 1.0 for major characteristics and AQL 2.5 for minor characteristics (see 4.4.4.2 for accept and reject criteria).

c. Components: Unless a specific contractor-generated inspection plan for all subcontracted components has been approved by the contracting activity (see 4.4.4.3), the following sampling for components shall apply. All rocket catapult components shall be examined for all critical characteristics. Sampling for other defects shall be in accordance with general inspection level II of ANSI/ASQC Z1.4, AQL 1.0 for major characteristics and AQL 2.5 for minor characteristics (see 4.4.4.3 for accept and reject criteria).

4.4.2.3 Sampling for firing test. A sample of loaded rocket catapults shall be submitted to the Indian Head Division, Naval Surface Warfare Center, Indian Head, MD 20640-5000, for static firing in accordance with 4.4.5. The sample size shall be in accordance with table IV. Samples shall be chosen by Indian Head Division, Naval Surface Warfare Center personnel or by a designated Government representative upon completion of the production lot assembly. Loaded rocket catapult samples shall not be preselected during production. Rocket catapults selected for sampling shall not be included as part of the quantity specified for

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

delivery in the contract or order. The ballistic sample size shall be divided as equally as possible among rocket motor batches and cartridge batches. From each rocket motor batch not represented in the sample rocket catapult assemblies, one sample rocket motor shall be selected for static firing by the contractor (see 4.4.5.1) so that at least one rocket motor from each rocket motor batch has been static fired.

TABLE IV. Static firing sample size and temperature conditioning plan.

Lot size	Sample size -65 to 70°F	Sample size 160 to 165°F	Total firing sample	Acceptability constant K[1/]
Up to 40	3	3	6	—
41 to 65	4	4	8	—
66 to 110	5	5	10	—
111 to 180	7	7	14	—
181 to 300	10	10	20	—
301 to 340	11	11	22	1.41
341 to 380	12	12	24	1.43
381 to 420	13	13	26	1.45

1/ The acceptability constant (K) for a lot size up to 300 loaded units shall be derived in accordance with MIL-STD-414 (see 4.4.5). K for a lot size between 301 and 420 shall be as indicated.

4.4.2.4 Sampling for nondestructive test. Each rocket catapult assembly shall be subjected to the tests specified in 4.4.6.

4.4.3 Resubmission of rejected lot. A sample of rocket catapult assemblies shall be selected in accordance with 4.4.2.3 and submitted when, with the prior approval of the contracting activity, the contractor requests that the rejected lot be test fired under different conditions or the contractor believes a rejected lot may be reworked to meet the requirements of this specification.

4.4.4 Examination.

4.4.4.1 Critical and major defects. Each rocket catapult assembly shall be examined for critical and major defects in accordance with the applicable drawings, 3.5, 3.6, 3.7, 3.8, 3.9, 3.11, 3.12, and the sampling plan of 4.4.2.2 a. Any rocket catapult assembly found to contain a critical or major defect shall be rejected.

4.4.4.2 Minor defects. Unless an alternative method is approved, the sample rocket catapult assemblies shall be examined for minor defects in accordance with the applicable drawings, 3.10, 3.14, 3.15, and the sampling plan of 4.4.2.2 b. If any rocket catapult assembly is found to contain a minor defect, the rocket catapult lot shall be rejected. The lot may be resubmitted for examination of minor defects when all of the defective units are removed from the lot or all of the defects are corrected.

4.4.4.3 Component examination. Unless an alternative method is approved, the rocket catapult components shall be examined in accordance with the applicable drawings and the sampling plan of 4.4.2.2 c. Any

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

component found to contain a critical defect shall be rejected. If any component is found to contain a major or minor defect, the component lot shall be rejected. The component lot may be resubmitted for examination of major or minor defects when all of the defective units are removed from the lot or when all of the defects are corrected. Alternative methods may be proposed and used with the approval of the contracting activity. The method shall be depicted in the contractor's quality program plan (see 6.2) and shall ensure that all fabricating and processing of any type are accomplished under the controlled conditions which are monitored and accepted by the contracting activity. Systematic control is required for all facets of work to assure all dimensions and requirements are met. This control can be accomplished through direct or indirect inspection, process monitoring, or statistical process control, or a combination of all four. Inspection for rubber O-rings shall be in accordance with MIL-STD-413.

4.4.5 Production lot acceptance firing. Rocket catapults selected in accordance with 4.4.2.3 shall be static fired at the Indian Head Division, Naval Surface Warfare Center, Indian Head, MD within 30 days after submission for acceptance of the rocket catapult lot. The sample catapults shall be divided into two equal groups with one group conditioned at $-65 \pm 2^{\circ}$F and the other group conditioned at $165 \pm 2^{\circ}$F. Each group shall be conditioned for a minimum of 8 hours. The catapults shall be fired within 10 minutes after removal from the conditioning chamber. Minimum equipment accuracies shall be as shown in table V. Data specified in table I shall be analyzed in accordance with MIL-STD-414, Section B, Part I, using the procedures of B-2 through B-4, Table B-1, and an AQL of 2.5 percent. Nonconformance with Table I or any requirement of 3.4 shall be cause for rejection of the lot.

TABLE V. Test equipment accuracies.

Measured characteristic	Equipment accuracy
Maximum thrust	± 2.0 percent
Time	± 0.001 second
Maximum acceleration	± 5.0 percent
Pressure	± 2.0 percent
Temperature	$\pm 2.0^{\circ}$F
Minimum thrust frequency response for test stand	60 Hz

4.4.5.1 Contractor batch acceptance test firings. Rocket motors selected by the contractor to meet the requirements of 4.4.2.3 shall be static fired by the contractor as rocket motor batch acceptance tests. The sample rocket motors shall be divided into two equal groups with one group conditioned at $-65 \pm 2^{\circ}$F and the other group at $165 \pm 2^{\circ}$F. Each group shall be conditioned for a minimum of 8 hours. The rocket motors shall be fired within 10 minutes after removal from the conditioning chamber. Minimum equipment accuracies shall be as shown in table V. Failure of any rocket motor to meet the requirements of 3.4 shall be cause for rejection of the specific batch of rocket motors.

4.4.5.2 Post static-firing disassembly. A post firing disassembly and inspection shall be conducted on all first article units, all lot acceptance units, and all batch acceptance test units. Detailed observation on conditions, including marginal conditions of individual components, shall be noted. All findings shall be evaluated against the requirements of 3.4.1.1. When specified in the contract or order (see 6.2), a disassembly findings report shall be submitted to the contracting activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.4.6 Nondestructive tests. Each rocket catapult assembly shall be subjected to the following tests. When specified in the contract (see 6.2), the contractor shall furnish test reports detailing the results of all nondestructive tests for each lot of rocket catapults.

4.4.6.1 Radiographic inspection. Rocket catapults shall be radiographically inspected in accordance with MIL-STD-453, radiographic quality level I. Any deficiency shall be cause for rejection of the unit. Radiographs shall be capable of detecting defects and rocket catapult components 0.03 inch in length or width. When specified in the contract (see 6.2), all radiographs taken of the rocket catapult assembly or components thereof shall be forwarded to the activity designated by the contracting activity. Otherwise, all radiographs shall be inspected on-site by a designated Government representative. Acceptance of the loaded rocket catapult lot shall be subject to approval of the radiographs by the designated Government activity.

4.4.6.2 Breakaway torque. After ascertaining that each booster tube (Drawing 10551422) and head (Drawing 10551412) assembly and the launcher tube (Drawing 10551423) and mount (Drawing 10551413) assembly has been seated with 400 + 50, – 0 inch-pounds of torque, a breakaway torque of 200 inch-pounds shall be applied. Any evidence of loosening or deformation of any component of these assemblies shall result in rejection of the part.

4.4.6.3 Residual magnetism. Each rocket catapult assembly shall be passed 6 inches in front of an MS17983 compass along the entire length of the catapult in accordance with figure 1. If the compass indicator deflects more than 5 degrees in either direction, the rocket catapult assembly shall be rejected. The test shall be performed in an area free from local magnetic effects.

4.4.6.4 Nozzle O-ring integrity. The retainer-nozzle ball O-ring shall be tested for leakage by partially assembling the catapult so that the retainer nozzle subassembly and the motor tube are assembled. The assembly shall then be pressurized to 40 psig and the nozzle swiveled through its operational range. Any loss of pressure within 15 seconds after the nozzle has been fully swiveled shall result in rejection of the catapult assembly. Application of 40 psig internal pressure to the sealed assembly must cause the nozzle to rotate from the axial position to the final canted position without application of any external force. Failure to rotate completely shall result in rejection of the assembly.

4.4.6.5 Release O-ring integrity. The release O-rings shall be tested for leakage by pressurizing the launcher tube-mount subassembly with nitrogen at 200 ± 5 psig. Any loss of pressure within 15 seconds of pressurization shall result in rejection of the catapult assembly.

4.4.6.6 Nozzle/sleeve actuation force. The retainer/nozzle/sleeve subassembly shall be tested to permit measurement of the axial force which is necessary to move the sleeve an adequate distance to cause full rotation of the nozzle. The assembly shall include all internal O-rings when tested. The force measurement shall be performed with a suitable force gage accurate to 1 pound. The measurement of an axial force exceeding 25 pounds shall result in rejection of the assembly.

4.4.6.7 Hydrostatic pressure. Each component listed shall be subjected to the respective internal hydrostatic pressure specified in table II for a minimum of 15 seconds without application of an external load. Any leakage, permanent deformation outside drawing tolerances, or mechanical failure shall result in rejection of that component. Each hydrostatically tested component shall then be subjected to the magnetic particle inspection of 4.4.6.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

4.4.6.8 Magnetic particle inspection. Each motor tube, booster tube, and launcher tube shall be 100 percent magnetic particle inspected in accordance with ASTM E 1444. Discontinuities exceeding one-half the maximum size permitted by MIL-STD-1907, Grade A, Table I, are unacceptable.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory).

6.1 Intended use. The CKU-7/A Aircraft Ejection Seat Catapult Assembly is intended to be used to propel an aircraft ejection seat and its occupant safely out and away from a jet aircraft.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1, 2.1.2, and 2.2).

c. Whether a first article sample is required (see 3.1, 4.3 and 6.4).

d. Instructions for adaption of first article samples for pressure transducers (see 4.3 and 6.7).

e. Assigned activity for first article inspection and static firing tests (see 4.3, 4.3.2, 4.4.2.3, 4.4.5, and 6.8).

f. Whether the gun fire vibration test is required (see 4.3.1.2).

g. Whether test reports are required (see 4.4.1, 4.4.5.2, and 4.4.6).

h. When radiographs are to be furnished to the Government (see 4.4.6.1).

i. Packaging requirements (see 5.1).

j. Disposition of hardware, scrap propellant, and metal parts (see 6.9).

k. Inspection conditions, if other than as specified (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

l. Whether any of the following are required and, if so the appropriate DID: test reports, ammunition data cards, certification data, or product assurance quality program plan.

m. That the safety precaution requirements of the "Contractor's Safety Manual for Ammunition, Explosives, and Related Dangerous Material," DOD 4145.26M are applicable. NOTE: When this specification is used as part of the description of work to be accomplished by a Government activity, the safety precaution requirements of "Ammunition and Explosives Ashore" OP 5 are applicable.

6.3 Definitions. (See figure 2.)

6.3.1 Mechanical failure. A mechanical failure is defined as any deformation or breakage of a part, the occurrence of which is other than a design function.

6.3.2 Catapult ignition delay time. Catapult ignition delay time (CId) is the elapsed time from the first indication of shearing of the firing pin shear pins (t_0) to the beginning of the continuous rise (t_1) on the catapult thrust-time record (see figure 2).

6.3.3 Catapult launch time. Catapult launch time (CLt) is defined as the time between the beginning of the continuous rise (t_1) on the thrust-time curve and separation (t_2).

6.3.4 Catapult separation velocity. Catapult separation velocity (CSv) is defined as the average velocity of the simulated ejected weight propelled horizontally at catapult separation measured over the interval from separation to 12 inches after separation.

6.3.5 Rate of change of acceleration. Rate of change of acceleration (ΔA) is defined as the maximum change in acceleration occurring in any 30 millisecond interval on the continuously rising portion of the acceleration time record (see figure 2).

6.3.6 Rocket motor ignition delay. Rocket motor ignition time (RId) is the elapsed time from separation (the point on the catapult thrust trace where the trace begins to drop sharply) to 10 percent of maximum thrust, as measured on the rising portion of the normal component rocket thrust trace (see figure 2).

6.3.7 Rocket motor action time. Action time (RAt) is determined from the normal thrust-time curve, and is defined as the time interval from the 10 percent of maximum thrust on the initial rise of the curve to the corresponding 10 percent of thrust on the declining portion of the curve (see figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

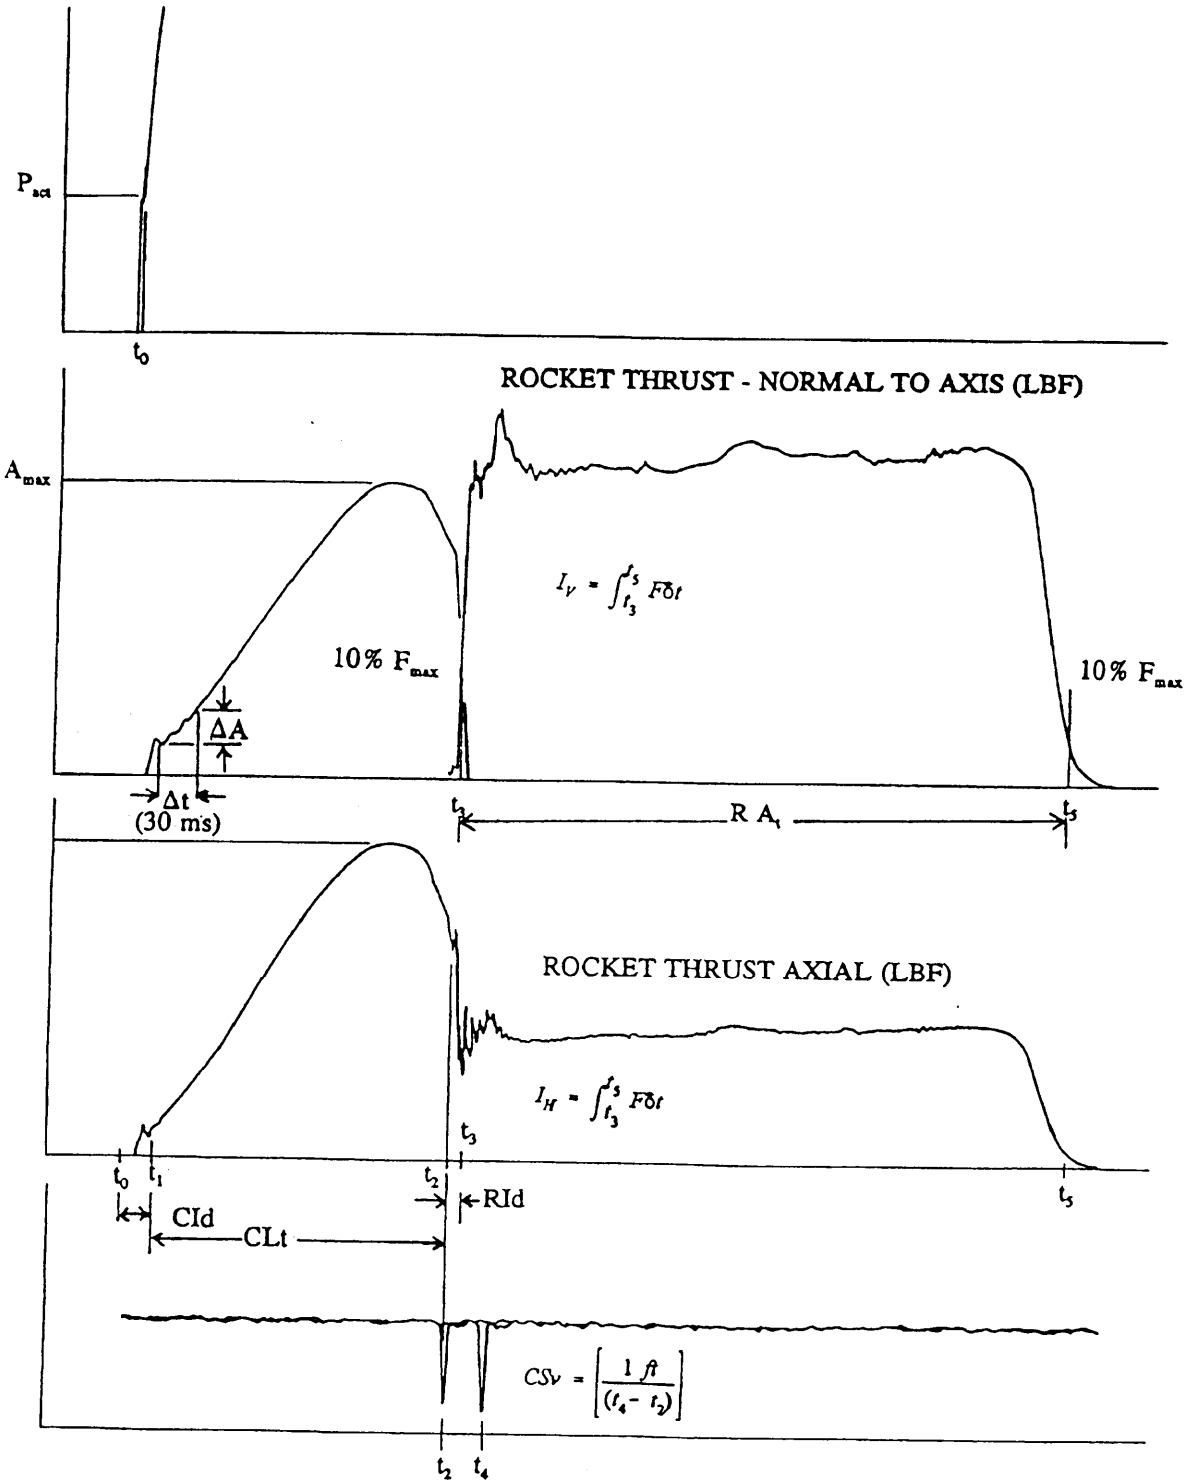


FIGURE 2. **Performance curve.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

6.3.8 Rocket motor resultant thrust. The rocket motor resultant thrust (RF_{max}) is obtained by vectorially adding the two maximum components of rocket thrust that occur at one time.

6.3.9 Rocket motor resultant impulse. The rocket motor resultant impulse (RIr) is obtained by integrating the resultant thrust (Rf_{max}) of the rocket motor over the action time.

6.3.10 Catapult dynamic response index (DRI). DRI is representative of the maximum dynamic compression of the vertebral column of the human body, as defined in MIL-S-9479.

6.3.11 Catapult axial thrust. Catapult axial thrust (CF_{max}) is the maximum thrust from the thrust-time curve that occurs during the catapult launch time.

6.3.12 Propellant batch. A propellant batch is a mix of ingredients, each ingredient composed of one homogeneous lot, that is mixed at one time in one vessel, resulting in a homogeneous mixture.

6.3.13 Rocket motor batch. A rocket motor batch is a group of rocket motors cast from one propellant batch.

6.3.14 Rocket motor lot. A rocket motor lot is a group of rocket motors composed of one or more rocket motor batches all having the same ingredient lots.

6.3.15 Rocket catapult lot. A rocket catapult lot is a group of units composed of one lot of rocket motors and one lot of catapult cartridges that are assembled at one time.

6.3.16 Primary components. Primary components are all components containing explosive ingredients. This includes the cartridge percussion primer, the cartridge, and the rocket motor.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the items should be a first article sample or a sample selected from the first production items (see 3.1), and the number of items to be tested as specified in 4.3. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 Hazard notice. The rocket catapult described herein and certain of its components are flammable or explosive and present hazards in manufacture, handling, storage, and shipment. The contractor should recognize these properties and take appropriate measures to guard and protect against fire, explosion, adverse environment, corrosive atmosphere, rough handling, and electrically induced incidents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

6.6 Explosive hazard classification. The explosive hazard classification for this rocket catapult has been designated as:

Explosive Hazard Classification - Class 1, Division 3
Storage Compatibility Group - Group C
Department of Transportation (DOT) Hazard Class - Class B
DOT Marking - Rocket Motors

6.7 Pressure transducers. Instructions for adapting the first article catapult assemblies for pressure transducers should be compatible with instruments having a response not less than 600 Hz and that are capable of detecting ignition peak pressures and unstable burning rates.

6.8 Test facility. The Indian Head Division, Naval Surface Warfare Center, Indian Head, MD is the design agent for the product covered by this specification. As such, they are equipped to perform the first article inspection and static firing tests specified herein. Except when special conditions warrant otherwise, the Indian Head Division, Naval Surface Warfare Center, Indian Head, MD should be designated as the test facility for the first article inspection and the production acceptance test firings.

6.9 Disposition of hardware, scrap propellant, and metal parts. The contract should specify that:

a. all items purchased become the property of the U.S. Government

b. no hardware, propellant, or metal parts shall be disposed of without authorization of the contracting activity

c. all items be made available to the contracting activity upon request

d. the disposition of any tested hardware, propellant, or metal parts without authorization by the contracting activity will result in the test being declared invalid, and a retest will be required.

6.10 Retention of radiographs. All radiographs of accepted lots of rocket catapults are to be retained on file by the contractor for 11 years or 1 year past the service life of the unit, whichever is longer.

6.11 Service life. The rocket catapult has a design life of 10 years and an installed service life of 10 years from the date of manufacture of the oldest batch of cartridge propellant.

6.12 Subject term (keyword) listing.

Rocket catapult
Rocket motor

6.13 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations. This amendment was authorized by ECP number 03046-5120.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.

Preparing activity:
Navy - OS
(Project 1377-0213)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:31Z
Check the source to verify that this is the current version before use.