[Inch-Pound]
A-A-3005
February 28, 1997
SUPERSEDING
AA-F-680
March 22, 1988

COMMERCIAL ITEM DESCRIPTION

FRAME, PICTURE (WOOD)

The General Services Administration has authorized the use of this commercial item description, for all Federal agencies.

1. SCOPE. This commercial item description covers requirements for wood picture frames.

2. CLASSIFICATION.

2.1 Types, styles and sizes. The picture frames covered by this commercial item description shall be of the following types, styles and, sizes, unless otherwise specified (see 7.1). These sizes represent the length and width of the glass and item to be displayed. They do not represent the display area or the overall size of the frame (see 7.2).

Type I - Wall mount
Type II - Freestanding with easel support

Style A - Black Finish (See figure 1)
Style B - Walnut Vinyl Covering (See figure 1)
Style C - Walnut Stain Finish (See figure 1)
Style D - Stain Finish (See figure 1)
Style E - Ribbed Gold (See figure 1)
Style F - Oak (See figure 1)
Style G - Custom

Sizes		Sizes	
1	5 x 7 inches	7	11 x 14 inches
2	8 x 10 inches	8	11 x 14 inches
3	8-1/2 x 11 inches	9	14 x 18 inches
4	9 x 12 inches	10	16 x 20 inches
5	10 x 12 inches	11	18 x 24 inches
6	10 x 14 inches	12	20 x 24 inches

3. SALIENT CHARACTERISTICS

3.1 Material. All materials used shall be as specified herein. Materials shall be free from defects that affect the serviceability or appearance of the finished product.

3.1.1 Wood. Except as otherwise specified herein, wood for the molding shall be any domestic (grown in the United States) species, dried to a moisture content from 5 to 9 percent. The wood shall be

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: General Services Administration, Federal Supply Service, National Furniture Center (3FNE-CO), Washington, DC 20406.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

sanded smooth and be free from defects, except that discoloration that will not affect the finished appearance will be permitted.

3.1.1.1 Style F. Wood for style F frames shall be red oak.

3.1.2 Glass. The glass shall be in accordance with ASTM C-1036, Type I, Class 1, Quality q1, q2, q4 or q5, thickness range 0.085 to 0.101 inch (single strength).

3.1.3 Paperboard.

3.1.3.1 Mat board. Boards for mats in style B and C frames shall be 0.64 ± 0.05 mm thick, with a white matte finish on one side. Boards for mats in Style D, E, F, and G frames shall be 1.27 ± 0.05 mm thick and shall be white or cream colored, unless otherwise specified in the contract or order.

3.1.3.2 Binder board.

a. Type I. Binder board that is used for the back shall be 1.27 ± 0.05 mm thick.

b. Type II. Binder board used for the back shall be 1.77 ± 0.05 mm. The board used for the easel shall be 2.03 ± 0.05 mm. The binder board and easel shall be black with a finished face.

3.1.4 Adhesive. The adhesive that is used for the finger joints shall be any adhesive that will develop an average block shear strength of not less than 19,300 kilopascals when tested as specified in 5.5.2.

3.2 Construction.

3.2.1 Frame. The frame shall have mitered butt joints at the corners. Any gap shall be less than 0.40 mm wide. The overlap at the miter shall not exceed 0.56 mm. Glass as specified in 3.1.2 shall fit within the frame. The gap between the glass and frame shall be not more than 0.38 mm. The glass, the mat (when required), and the back shall be firmly held in place by metal clips or similar holding devices. There shall be a minimum of three holding devices on each side longer than 11 inches and a minimum of two on each side 11 inches or less.

3.2.1.1 Style A. Frame joints shall be secured with two 19 mm long leg staples, clamp nails, or similarly designed metal splines driven into the sides of each corner. Staples, nails, or splines shall be flush ± 0.40 mm.

3.2.1.2 Styles B, C, D, E, F, and G. Frame joints shall be secured by two one inch long leg staples, clamp nails, or similarly designed metal splines driven into the sides of each corner. Alternatively, style D, E, F and G frame joints shall be secured with two v-nails or one corrugated staple driven into the back in each corner. The staples, nails or splines driven through the sides shall blend with the frame finish.

3.2.2 Hangers.

3.2.2.1 Sides 14 inches or less. At least two hangers shall be provided for each frame. Saw tooth hangers shall be attached to the molding back and positioned to permit the frame to be hung level, with either the long or short side on top.

3.2.2.2 Sides longer than 14 inches. For frames with sides longer than 14 inches, four hangers shall be provided, with two on one long side and two on one short side. Hangers shall not be visible from the front of the frame when it is in use. Alternately, four ring style hangers may be attached to the back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

The ring style hangers shall be positioned not less than 11 mm from the edges, to permit the frame to be hung with either the long or short side on the top. Hanger wire or cord shall be provided with ring style hangers. Wire or cord shall not show when the frame is in use.

3.2.3 Easel back. The easel back shall be provided on all Type II frames, in addition to the hangers specified in 3.2.2. The easel shall be designed to allow the frame to stand with either the long or short side on top, at the user's option.

3.2.4 Molding. The molding shall be constructed of wood specified in 3.1.1 and shall be one piece or may be finger joined together with only one line of the joint showing on the face. For Type F, each side shall be constructed of a single piece of wood with no joints. The species of wood of the mating pieces shall be the same. The finger joints shall be equal in strength to one piece of solid wood. When the frame is finished as specified in 3.3, the finger joints shall not be visible. The molding shall be shaped to receive the glass, mat (when required), display item and back. The face of the molding shall extend not less than 3/16 inch from the glass and shall overlap the edge of the glass not less than 3/16 inch and not more than 3/8 inch. See figure 1 for the cross section outline. The cross section outline is for descriptive purposes only. Other outlines are acceptable. The overall dimensions of the molding shall have a tolerance of plus or minus 1/16 inch.

3.2.4.1 Style A molding. The style A molding shall be 3/4 inch wide by 1/2 thick minimum.

3.2.4.2 Style B and C molding. The face of the style B and C molding shall be concave and have a raised bead or a half-round bead along the inside edge. The width of the molding shall not be less than 1-3/8 inches and not more than l-l/2 inches. The thickness of the molding shall not be less than 1/2 inch.

3.2.4.3 Style D molding. The face and side of the style D molding shall be approximately as shown in figure 1. The bead on the inside edge shall be embossed. The width of the molding shall be 3/4 inch. The thickness of the molding shall be 13/16 inch.

3.2.4.4 Style E molding. Style E molding shall be approximately as shown in figure 1. The width of the molding shall be 3/4 inch. The thickness of the molding shall be 13/16 inch.

3.2.4.5 Style F molding. Style F molding shall be approximately as shown in figure 1. The width of the molding shall be 3/4 inch. The thickness of the molding shall be 3/4 inch.

3.2.4.6 Style G molding. Style G molding shall be a manufacturer's standard commercial molding profile provided it meets the requirements of paragraph 3.2.4.

3.2.5 Mats. Mats shall be furnished with styles B, C, and D frames. When specified, mats shall be furnished with Style E, F, and G frames. The mat sizes shall correspond in height and width *to those of* the glass. The display area (cutouts) shall be centered and shall be the sizes specified in table I. Mats for style D, E, F, and G frames shall be bevel cut. When sizes other than those listed in Table I are required, the display area (cutouts) shall be as specified (see 7.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

TABLE I, Display area (cut-out) and corresponding frame sizes		
	Frame size (inches)	Display area (inches)
1	(5 x 7)	3 x 5
2	(8 x 10)	5 x 7
3	(8-1/2 x 11)	5 x 7
4	(9 x 12)	7 x 9
5	(10 x 12)	7 x 9
6	(10 x 14)	8 x 10
7	(11 x 14)	8 x 10
8	(11 x 14)	10 x 12
9	(14 x 18)	9 x 12
10	(16 x 20)	12 x 16
11	(18 x 24)	14 x 20
12	(20 x 24)	16 x 20

3.3 Finishing. The style A, C, D, E, F and G moldings shall be sealed and coated with at least two coats of enamel or lacquer. The finish shall produce a smooth uniform surface without blisters, wrinkles, pits, runs, tackiness or orange peel.

3.3.1 Color.

3.3.1.1 Style A. The color of the finish shall be black.

3.3.1.2 Style B. The exposed surfaces of the style B molding, except for the inside bead which will be exposed when the frame is in use, shall have a simulated grain-walnut vinyl film coating permanently adhered thereto. The color of the inside bead shall be gold laminated paper with a polyester coating.

3.3.1.3 Style C. The color of the finish shall be walnut. The color of the inside bead shall be gold. The bead material shall be hot stamped gold foil.

3.3.1.4 Style D. The color of the finish shall be gold, walnut, oak, mahogany, or black, as specified (see 7.1). The embossed bead shall be gold.

3.3.1.5 Style E. The color of the frame shall be gold.

3.3.1.6 Style F. The frame color shall be the natural red oak color with a clear finish. The color of all oak used in a single frame shall reasonably match in color.

3.3.1.7 Style G. The frame color shall be as specified in the contract or order.

3.4 Identification marking. Each frame shall be marked in a plain, permanent and inconspicuous manner with the contractor's name or trademark, contract number, or order number, item stock number, and year of manufacture. This data shall be applied in such a manner as to resist feathering and smearing.

3.5 Workmanship. The workmanship shall be of a quality to produce a serviceable frame of good appearance. The molding shall be accurately shaped. The miter joints shall be strong and true. The finishing brads, nails, or staples shall be completely inserted and the hangers and holding devices securely attached. The edges of the mat cutouts shall be straight and smooth. The occurrence of defects that affect the appearance or serviceability of the frames shall not exceed the acceptable quality level (AQL) specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

4. REGULATORY REQUIREMENTS. The offerer/contractor is encouraged to use recovered materials in accordance with public law 94-580, as amended, to the maximum extent practicable.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producers own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements specified herein. Unless otherwise specified (see 6.1), the supplier may utilize his own or any other inspection facilities acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and made available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in this commercial item description where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

5.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with provisions set forth in ANSI/ASQC Z1.4, except where otherwise specified herein.

5.3.1 End item inspection. The frames shall be examined for the defects listed in table II. The lot size shall be expressed in units of frames for the purpose of determining the sample size in accordance with ANSI/ASQC Z1.4. The sample unit for this examination shall be one completely assembled frame of each style and size on contract. The inspection level and Acceptable Quality Level (AQL) shall be as specified in 5.3.

NOTE: Only one of the defects in brackets shall be scored for each unit of product examined.

TABLE II, Classification of end item defects

Examine	Defect	Classification	
		Major	Minor
Finish	Indication of decay under coating	X	
	Wrong color		X
	Peeling, blistering, flaky or other poor adhesion	X	
	Tacky (not dry to touch)]		
	Orange peel, runs, wrinkles, sags or cracks }		X
	Scratches, abrasions, chips or nicks]		
	Area of no paint coating or vinyl covering	X	
	Area of thin paint coating		X
	Vinyl film not color specified		X
	Vinyl film wrinkled or dirty	X	
Molding	Finger joints loose	X	
	Finger joint visible		X
	Outside edge not rounded		X
	Not designed as specified	X	
	More than one finger joint per frame side.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Wood	Not species specified		X
	Warped, chipped or splintered	X	
	Any characteristic defect, except discoloration not affecting finished appearance		X
	Any non-permissible defect filled with filler	X	
Glass	Cracked or broken	X	
	Pronounced ream		
	Stones or skim		X
	Heavy scratch or chipped		
	Lines, specks, etc., that perceptibly interfere with vision through glass	X	
	Edges not straight and even		X
Mat and Back	Ragged, uneven or crushed edge		X
	Hole, tear or split	X	
	Creased, wrinkled, or dirty		X
Construction And Workmanship	Loose or uneven joint		
	Frame out of square more than 1/16 inch	X	
	Glass loose in frame(assembly)		X
	Brad, staple, or nail not completely driven down		X
	Brad, hanger, or clip missing	X	
	Hangers not positioned to permit hanging with either side upright		X
Identification	Missing, illegible, incomplete or not permanent type marking		X

5.3.1.1 Dimensional examination. Inspection will be made for compliance with the dimensions specified herein. Any dimension not within the tolerance specified will be classified as a defect.

5.3.1.2 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking comply with the section 6 requirements. The inspection level shall be level II, with an AQL of 6.5 percent defective.

5.4 Inspection levels and AQL's. The acceptable quality level expressed in percent defective and inspection levels shall be as follows in table III:

TABLE III

Examination	Inspection level	AQL's
Table II major	I	4.0
Table II minor	I	10.0
4.2.1.2	S-2	4.0

5.5 Tests.

5.5.1 Testing of holding devices. The test shall be conducted with the correct number of picture

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

holding devices attached properly to the frame. Each holding device on the frame shall be cycled five times. One cycle shall consist of the operation necessary for the insertion of items in the frame and the removal of items from the frame. At the completion of the five cycles all holding devices on the frame shall be operational. Failure to pass the test shall be cause for rejection of the lot represented by the frame under test. The inspection level shall be level S-2, with an AQL of 4.0 percent defective, shall be used for selection of the number of frames to be tested from any lot.

5.5.2 Test for adhesive. This test does not need to be performed if the contractor certifies that no finger jointing will be supplied. The test requirements are in table IV. There is a high degree of variation in the test results. Because of that variability, the following precautions should be followed. Whenever a specimen fails at a load less than 19,300 kilopascals. and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 19,300 kilopascals or higher, and the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 19,300 kilopascals.

TABLE IV - Test for adhesives

Component	Characteristic	Requirement reference	Test method	Sample unit
Adhesive	Block shear test	3.2.4	ASTM D905	1/2 pint

6. PACKAGING. Preservations, packing, and marking shall be as specified in the contract or order.

6.1 Marking. In addition to marking specified in the contract or order, each shipping container shall be marked with arrows to indicate the position of the container so that the frames are upright. Both sides of each unit container and shipping container shall be stenciled or labeled with the following:

GLASS - FRAGILE, HANDLE WITH CARE

7. NOTES.

7.1 Purchasers should select the preferred options permitted herein and include the information in procurement documents,

(a) Number, title, and date of this commercial item description.
(b) Type, style, and size of frame required (2.1).
(c) Color of finish on Style D or G (3.3.1.4)
(d) If mat is required on Styles E, F or G (3.2.5)
(e) Size of display area (cutouts) when not listed in 1.2.1 (3.2.5).
(f) Color of mat, if other than white or cream (3.1.3.1)
(g) Packaging, packing and marking required (6).

7.2 Frame size. The frame sizes specified in 2.1 represent the length and width of the glass and the mat or item to be displayed. The molding overlaps the glass by approximately 1/4 inch. Therefore, the display area is 1/2 inch less in both length and width than the specified size. The style A, D, E, and F moldings are at least 3/4 inch wide so the overall outside size of the style A and D frames is approximately 1 inch more in length and width than the specified size. The molding on the style B and C frames is at least 1-3/8 inches wide and has an overall outside dimension approximately 2-1/4 larger than the display size. The sizes and display areas for the style B, C, and D mats are shown in Table I.

7.3 Enamel finish samples. Sample panels of the specified enamel finish can be obtained from the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

Business Service Center, Federal Supply Service, General Services Administration, Washington, DC 20406, or from the Business Service Center in the nearest GSA Regional Office.

7.4 Federal specifications, standards, and commercial item descriptions may be obtained from the General Services Administration as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402. Single copies of this specification, and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration.

7.5 ASTM standards are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

7.6 ANSI/ASQC Z1.4 is available from the American Society For Quality Control, 611 East Wisconsin Avenue, Milwaukee, WI 53202.)"

MILITARY INTERESTS:


NONE: DOD has .no registered interest in revisions and amendment to this Commercial Item Description until further notice.

PREPARING ACTIVITY:


GSA - FSS/FCNE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.


Style A

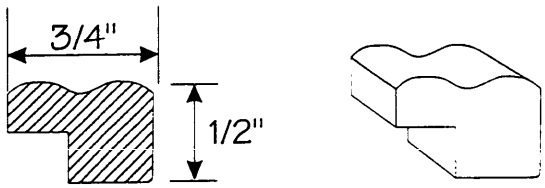


Style B

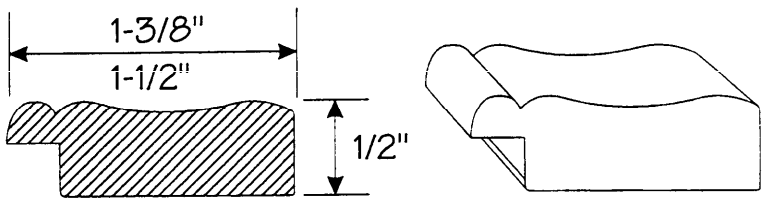


Style C

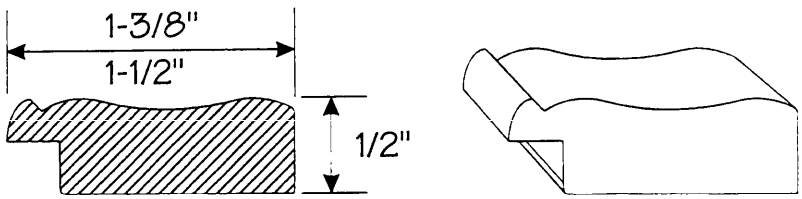

Style D

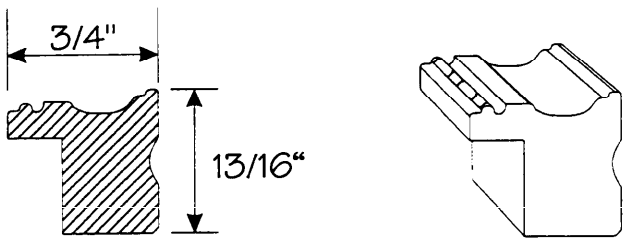

Style E

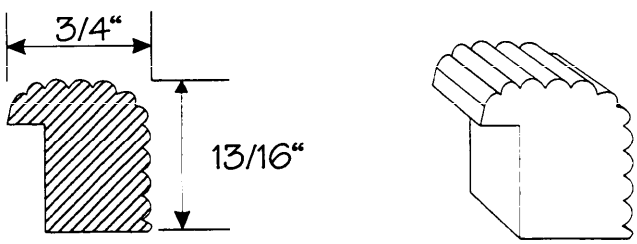

Style F

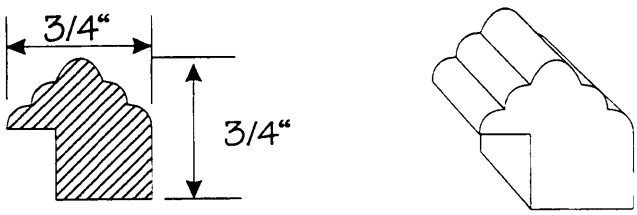


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:28Z
Check the source to verify that this is the current version before use.