INCH-POUND

A-A-55283
August 31, 1995

COMMERCIAL ITEM DESCRIPTION

SHIRT, WOMAN'S, TUCK-IN

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. **Scope**. This commercial item description covers the requirements for a short and long sleeve dress shirt worn by female personnel of the Department of the US Army.

2. **Classification**. The shirts shall be in the following classes:

Class 1	Short sleeve
Class 2	Long sleeve

3. SALIENT CHARACTERISTICS

3.1 Salient characteristics. The shirt design is a tuck-in made from polyester/cotton broadcloth. It shall have two piece princess style straight front seams and a one piece back. The shirt shall have a convertible collar with collar stays attached to the undercollar. The shirt shall have a seven (7) button front closure, positioned with one horizontal buttonhole at top of right front and six (6) vertical buttonholes spaced in accordance with buttonhole marker. One extra button shall be placed at the bottom left front 3 (± 1/8) inches from the bottom of shirt. Both classes of the shirt shall have two button down shoulder epaulets. The bottom hem and front facings shall be finished with an overedge stitch. The class 2 shirt shall have narrow continuous sleeve openings, sleeve pleats positioned as shown on sample pattern, and cuffs with two horizontal buttons for adjustment. The seams shall be safety stitched with 10 to 12 stitches per inch. Bottom hem and front facing shall be overedged. The collar shall be topstitched 1/4 to 3/8 inch from the edge.

Beneficial comments recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSE, 2800 South 20th Street, Philadelphia, PA 19145-5099.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. *Approved for public release; distribution is unlimited.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.1.1 Shoulder Epaulets. The tapered shoulder epaulets shall be 1 7/8 (± 1/8) inches wide at the armhole seam and 1-5/8 (± 1/8) inches wide at the pointed end and shall be topstitched 1/4 to 3/8 inch from the edge. Each shoulder epaulet shall have a buttonhole centered not more than 1/8 inch off center tolerance and 3/8 to 1/2 inch from point of epaulet. Each shoulder epaulet shall be positioned so that it loop is 1 (± 5/8) inch in front of the shoulder seam at the armhole and 1/4 (± 1/8) inch in back of shoulder seam at neck.

3.1.2 Sleeves

3.1.2.1 Class 1. The edge of the sleeve shall be turned in according to the notches as shown on sample pattern with raw edge turned in 1/4 inch and blindstitched. The hem shall finish 1 (± 1/8) inch wide.

3.1.2.2 Class 2. The sleeves shall have a narrow continuous sleeve opening, measuring 3 (± 1/8) inches along outside fold, using a continuous strip of basic material. The binding shall finish 3/8 to 1/2 inch wide. The sleeves shall have pleats positioned above the cuffs, as shown on sample pattern, facing towards the back of sleeve opening. The base of the sleeve-facing opening shall be reinforced with a 3/8 to 1/2 inch bartack. The cuffs shall finish 2-3/8 (± 1/16) inches wide and shall be edge stitched 1/4 (± 1/16) inch from edge. A horizontal buttonhole shall be placed in the center of each cuff, with the inside cut end of buttonhole 3/8 (± 1/16) inch from front edges.

3.1.3 Collar. The collar points shall finish 2-5/8 (± 1/8) inches in length. Each point shall have one unslotted or slotted stay. The collar ends shall be centered at equal distance from the center of the shirt front and the opening between points shall measure 3/8 to 1/2 inch when the collar is buttoned.

3.1.4 Seam appearance rating. The shirts shall be evaluated for cloth and seam appearance after five wash and dry cycles when tested in accordance with AATCC Test Method 143 [(3)IVA(iii)2)]. The cloth shall have a seam appearance rating of 3.5 minimum. Seam ratings shall be as specified below:

Seam Area	Minimum Average Rating of three observers
Collar	3.8
Epaulets	3.8
Right Front seams	2.8
Left Front seams	2.8
Armhole seam	2.8
Underarm seam	2.8
Side seams	2.8
Sleeve hems (Class 1 only)	2.8
Cuffs (Class 2 only)	3.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

3.2 Basic material. The basic material for the shirt shall be a blend of 65 (± 5) percent polyester and the remaining percentage cotton. The weave for the cloth shall be plain weave and of an end-and-end construction with alternate dyed and white warp yarns and an all white filling. The cloth shall be given a durable press treatment. The finished cloth shall match Army Green 415 when viewed under filtered tungsten lamps that approximate artificial daylight, and that have a correlated color temperature of 7500 (± 200) Kelvin (K), with illumination of 100 (± 20) foot candles. It shall be a good match to the standard sample under incandescent lamplight at 2300 (± 200) K.

3.2.1 The cloth shall have a minimum weight of 3.8 oz./sq. yd. and a maximum weight of 4.3 oz./sq. yd. when tested in accordance with ASTM D-3776, Option C; a minimum yarn count of 100 for the warp direction and 62 for the filling direction when tested in accordance with ASTM D-3775; a minimum breaking strength of 95 lbs. for the warp direction and 55 lbs. for the filling direction when tested in accordance with ASTM D-5034, and a minimum tearing strength of 4.5 for the warp direction and 3.0 for the filling direction when tested in accordance with ASTM D-1424.

3.2.2 The starch and protein content, including chloroform-soluble and water-soluble material, (prior to the application of the durable press treatment) shall not exceed 2.0 percent when tested in accordance with Nonferrous Materials, ASTM 629, section 9.

3.2.3 The cloth shall have dimensional stability of not more than 2.0 percent in either the warp or filling direction after five launderings when tested in accordance with AATCC 135-1992, [(3)IVA(iii)]. The specimen size for dimensional stability shall be 22 by 22 with 18 inch markings in both warp and filling directions.

3.2.4 The finished cloth shall be equal to standard or grade 4 on the AATCC Chromatic Transference Scale when subject to Wet and Dry Crocking in accordance with AATCC 8 and equal to standard or Grade 4 on the AATCC Chromatic Transference Scale and Step 4 on the Gray Scale for Colorfastness to laundering (after 3 wash & dry cycles) in accordance with AATCC 61, Test 3A. The finished cloth shall be equal to standard or Step 4 on the Gray Scale when subjected to Colorfastness to perspiration in accordance with AATCC 15 (cloth shall be subjected to both alkaline and acid solution) and, Colorfastness to light in accordance with AATCC 16, Option A 1/.

1/ Use the following to determine the length of exposure: When a color change equal to Step 4 on the Gray Scale is evident in either sample being evaluated or the standard sample, exposure shall be continued for an additional number of hours equal to the number of hours at which the color change was apparent. Specimens which do not show a color change until 80 AFU's shall be returned to the machine for a total exposure period not to exceed 140 hours.

3.3 Fusible interlining. The fusible cloth for the shoulder epaulets, cuffs, collar, and collarstand shall be a woven or nonwoven, thermally bonded by heat-activated fibers, powders or coated with

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:45Z
Check the source to verify that this is the currentversion before use.

an adhesive. The color shall be white.

3.3.1 The nonwoven fabric shall be either flat or print-bonded with a minimum weight of 1.6 oz./sq. yd. when tested in accordance with ASTM D-3776, Option C and a minimum breaking strength of 2 lbs. for the machine (warp) direction and 2 lbs. for the crosswise (filling) direction when tested in accordance with ASTM D-5034. The woven fusible fabric shall have a minimum weight of 1.8 oz./sq. yd. when tested in accordance with ASTM D-3776, Option C, and minimum yarn count of 44 for the warp direction and a minimum of 40 for the filling direction when tested in accordance with ASTM D-3775; and a minimum breaking strength of 10 pounds per square inch for both the warp and filling direction when tested in accordance with ASTM D-5034.

3.3.2 The fusible interlining, after fusing to the basic cloth, shall meet an initial warp or machine direction bond strength of 32 ounces minimum per inch and 24 ounces minimum per inch after three laundering cycles in accordance with AATCC 135-1992 [(3)IVA(iii)], the bond strength shall be in accordance with AATCC 136-89 and the sample width shall be 3 inches. For optimum results, the fusing material manufacturer's recommendations for fusing dwell time, pressure and temperature, based upon fusing equipment used and basic material being fused, shall be utilized.

3.4 Thread. The thread for all sewing operations shall be White AH, C.A. 66050, conforming to A-A-50199, Ticket No. 70, 2-ply for the needle and Ticket No. 100, 2-ply for the looper.

3.5 Buttons. The buttons shall be flat, plastic, pearlescent-polyester composition, with 4 sewing holes, recessed center and 19 line. The color shall be White BA, C.A. 62031, with a glossy finish.

3.6 Buttonholes. The buttonholes shall be straight-cut, purl or whip type and the finished inside cut length shall be 1/2 to 9/16 inch long. The stitching shall be securely caught in the fabric and the ends shall be securely tacked. When purl type buttonholes are used, the purling shall be on the outside of the shirt.

3.7 Collar stays. The stays shall be made from polyethylene terephthalate with a thickness of 0.010 to 0.014 (± 0.001) inch. The color shall be natural (clear or opaque). The stays shall have any commercially accepted design. Slotted stays shall measure 1/2 (± 1/32) inch wide and unslotted stays shall measure 3/8 (± 1/32) inch wide. Both types shall be 2-3/4 to 2-7/8 inches long.

3.8 Labels. Each shirt shall have a white nonwoven commercial size label, and a combination identification/instruction label. The printing shall be black and shall consist of suitable non-toxic dye(s) or pigment(s) in a medium which yields a permanent impression. It shall not show offsetting, smearing, bleeding or discoloration. The printing shall be tested for colorfastness to crocking (wet and dry) in accordance with AATCC TM8. The shirt's label shall not smear and be clearly legible when evaluated after the end item tests for fabric and seam appearance after 5 laundering cycles.

3.8.1 The size label shall include the size and contract number. The lettering for the size label

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

shall be a minimum of 1/8 (± 1/16) inches high and shall be located at the center back of the collar and neck joining seam. The lettering for the combination identification/instruction label shall be 3/32 (± 1/32) inch and shall be located on the outside right front bottom (as worn) and shall contain the item name, shade number, contractor's name, contract number, fiber content and the following laundering instructions:

LAUNDERING INSTRUCTIONS

1. Wash with moderately hot water (115° F) using soap or mild detergent.
   a. For machine washing. Use wash and wear cycle.
   b. For hand washing. Do not wring or twist.
2. DO NOT STARCH OR BLEACH
3. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang.
4. To drip dry, remove from water before last spin cycle. Shape and hang.
5. Touch-up is recommended. Iron at a moderate or synthetic material heat setting.

DO NOT REMOVE THIS LABEL.

NOTE: Use the size label information below as an example:

37/31
(12R)
SP0100-XX-X-XXXX

NOTE: The first line of the label is the body measurement/sleeve length, the second is the size, and the third line is the contract number.

3.9 Label/tag. Each item shall be individually bar-coded with a paper tag for personal clothing items. The paper tag shall be standard bleached sulfate having a basis weight of 100 pounds. The paper used for the tags shall have a smooth finish to accept thermal transfer and direct printing. The tags shall have a hole and shall be attached to each item by a fastener, clearly legible and readable by a scanner. The bar coding element shall be a 13 digit national stock number (NSN). The bar code type shall be a medium to high code density and shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.10 Sizes and finished measurements. The shirt's finished measurements, expressed in inches shall be as indicated in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

TABLE I. Finished measurements, Label information and Schedule of sizes.

Size	1/2 Bust 1/	Sweep 2/	Back Length 3/	Collar 4/	Sleeve Length 5/			Short Sleeve Length 6/	Bust Size
					Short	Regular	Long		
4	18-1/2	38-1/2	27-1/2	14-1/4	29-1/2	31	32-1/2	3-3/4	32-1/2
6	19	39-1/2	27-5/8	14-1/2	29-1/2	31	32-1/2	3-3/4	33-1/2
8	19-1/2	40-1/2	27-3/4	14-3/4	29-1/2	31	32-1/2	3-3/4	34-1/2
10	20-1/4	42	27-7/8	15	29-1/2	31	32-1/2	3-3/4	36
12	21	43-1/2	28	15-1/4	29-1/2	31	32-1/2	3-3/4	37-1/2
14	21-3/4	45	28-1/8	15-1/2	29-1/2	31	32-1/2	3-3/4	39
16	22-3/4	47	28-1/4	15-3/4	29-1/2	31	32-1/2	3-3/4	41
18	23-3/4	49	28-3/4	16	29-1/2	31	32-1/2	3-3/4	43
20	24-3/4	51	28-1/2	16-1/4	29-1/2	31	32-1/2	3-3/4	45
Toler.	± 1/2	± 5/8	± 1/2	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4	N/A

1/ **1/2 Bust:** Measure across front from armhole seam to armhole seam with shirt buttoned and laid flat.

2/ **Sweep:** Measure across front at bottom of side seams with shirt buttoned and laid flat.

3/ **Back length:** Measure center back from undercollar seam to bottom of shirt.

4/ **Collar:** Measure along center of collarstand, from center of button to front cut end of buttonhole with collar in a flat position.

5/ **Sleeve length:** Measure from center back at collarstand seam, diagonally across back along sleeve, to the center bottom edge of cuff.

6/ **Short sleeve length:** Measure from underarm seam, where the shirt and sleeve join, along seam to bottom of sleeve.

3.11 Patterns. The Government shall furnish a complete set of patterns which provides for a 3/8 inch seam allowance. The government patterns may be used to create the contractor's working patterns, however the design of the patterns shall not be altered in anyway. Commercial patterns may be used in lieu of government furnished patterns. Minor modifications are permitted to accommodate automation; however the design and measurements of the government-furnished pattern must be maintained for both working, and commercial patterns.

4. Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description; conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Market acceptance criteria. The item offered or a generically similar model must have been sold to the commercial market or to the Government, and the contractor shall certify and provide supporting documentation as to its serviceability and the long term (five years) availability of all necessary maintenance and logistics support parts and materials.

5.3 Warranty. The item offered shall include the standard warranty given to the commercial market beginning with the date of delivery of the individual items.

5.4 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order.

5.5 Visual examination. Each shirt shall be examined for the defects listed in section 5.5.1 in accordance with ANSI/ASQC-Z1.4.

5.5.1 Defects. Any hole, cut, or tear; color not as specified; any shaded part or shade variation; any spot or stain (outside) or woven-in waste, permanent fold, pleat, or crease; raw edges, open seams, thread ends not removed, or loose tension resulting in loose seams; seams twisted, distorted, irregular or open, puckered, or pleated; seam allowance not as specified; any broken or missing stitches, loose or tight stitch tension; any buttonholes omitted, not securely caught, or not as specified; any buttons missing, broken, or malformed; any collar, and front closure not uniform in size or shape, uneven, or not stitched properly; any sleeves and cuffs with irregular stitching; twisted, or not uniform in length; any bartack missing, insecure, misplaced, not specified type, or not for the purpose intended; any shoulder epaulets that are twisted, poorly shaped, or misplaced; any fusible interlining that is omitted, twisted, puckered, pleated, has bleed through, applied in the incorrect location, or the wrong color; any material defects, distorted parts or poor workmanship; any component part omitted; label missing, incorrect, misplaced or illegible; finished measurement of item not as specified; bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded, packaged item; bar code causes damage to the item; any items not packaged in accordance with the contract or purchase order.

6. **PACKAGING.** The preservation, packing, and marking shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

7. **NOTES**

7.1 Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

7.2 Source of non-Government documents

ANSI/ASQC Z1.4 - Sampling Procedures and Table for Inspection by Attributes

(Application for copies should be addressed to the American National Standards Institute, 11 W. 42 nd Street, New York, NY 10036-8002.)

AATCC Test Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215.)

ASTM Test Methods

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

MILITARY INTERESTS:
Custodian:


Army - GL

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

PREPARING ACTIVITY:
DLA - CT

Project No. 8410-0859


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

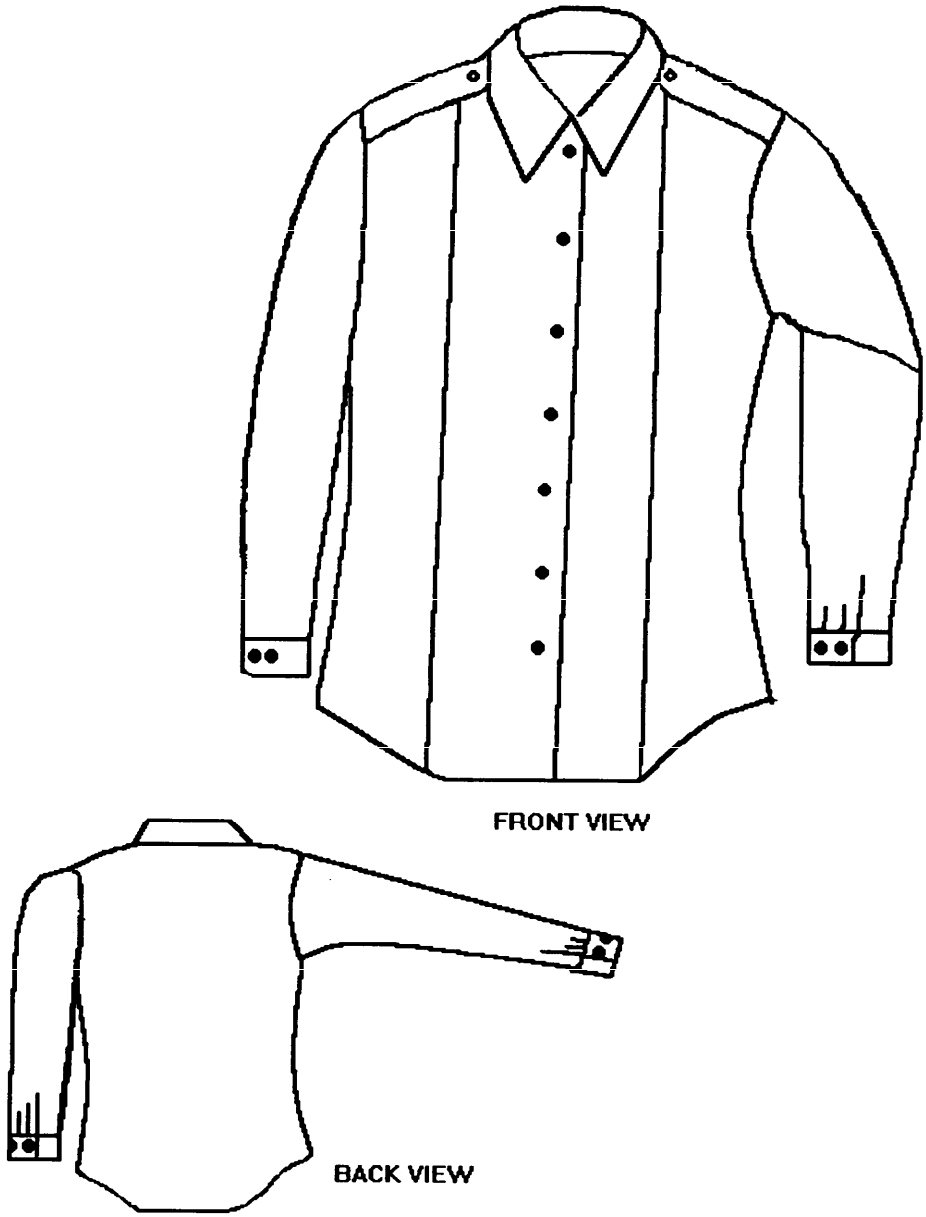

SHIRT, WOMEN' S, TUCK-IN, LONG SLEEVE TYPE I

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.

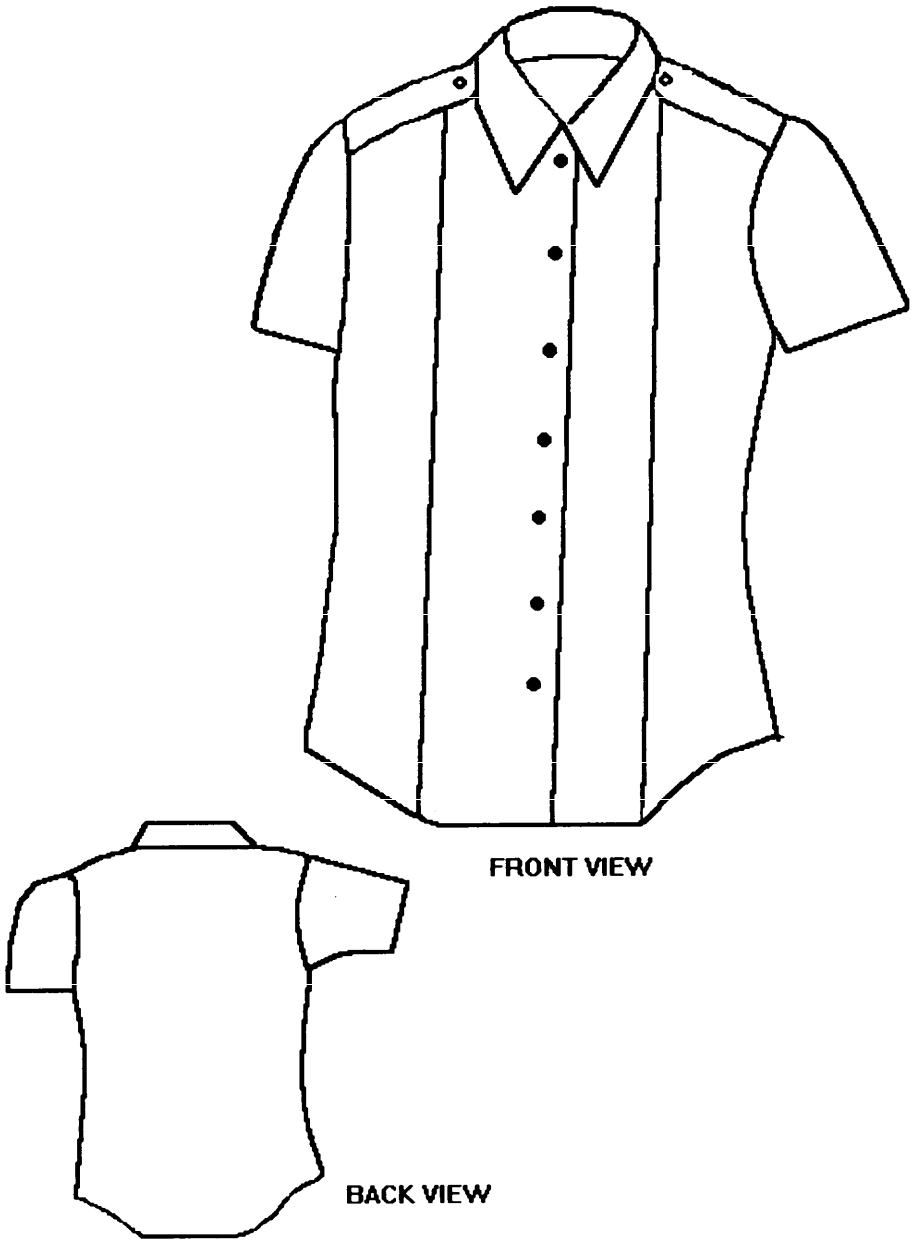

SHIRT, WOMEN' S, TUCK-IN, SHORT SLEEVE

TYPE II

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:45Z
Check the source to verify that this is the current version before use.