INCH-POUND
A-A-59305A
1 August 2019
SUPERSEDING
A-A-59305
15 April 1999

COMMERCIAL ITEM DESCRIPTION

TERMINAL, STUD
THREADED DOUBLE TURRET

The General Services Administration has authorized the use of this commercial item description (CID), for all federal agencies.

1. SCOPE. This commercial item description covers a double turret, threaded terminal stud for use on terminal boards.

2. CLASSIFCATION

2.1 Classification. The terminals shall be classified by the dash numbers listed in table I (see 7.3(b)).

3. SALIENT CHARACTERISTICS

3.1 General. The terminal stud shall be a double turret threaded type.

3.2 Material. The material shall be half-hard temper brass conforming to one of the following alloys:

a. C36000 in accordance with ASTM B16/B16M, "Free-Cutting Brass Rod, Bar and Shapes for Use in Screw Machines".

b. C34200 or C35300 in accordance with ASTM B121/B121M, "Leaded Brass Plate, Sheet, Strip, and Rolled Bar".

c. C31400 in accordance with ASTM B140/B140M, "Copper-Zinc-Lead (Red Brass or Hardware Bronze) Rod, Bar, and Shapes".

3.3 Interface. Dimensional requirements are contained in table I and figure 1. Dimensions are in inches, unless otherwise specified and should be interpreted in accordance with ASME Standard Y14.5M.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: STDZNMGT@dla.mil or DLA Aviation-VEB, 8000 Jefferson Davis Highway, Richmond VA 23297-5610.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensional requirements.

Dash Number	Thickness of Mounting Board	L ±.005	Style
-05	1/16	1/8	1
-06			2
-07	5/32	3/16	1
-08			2
-09	7/32	1/4	1
-10			2
-11	9/32	3/8	2

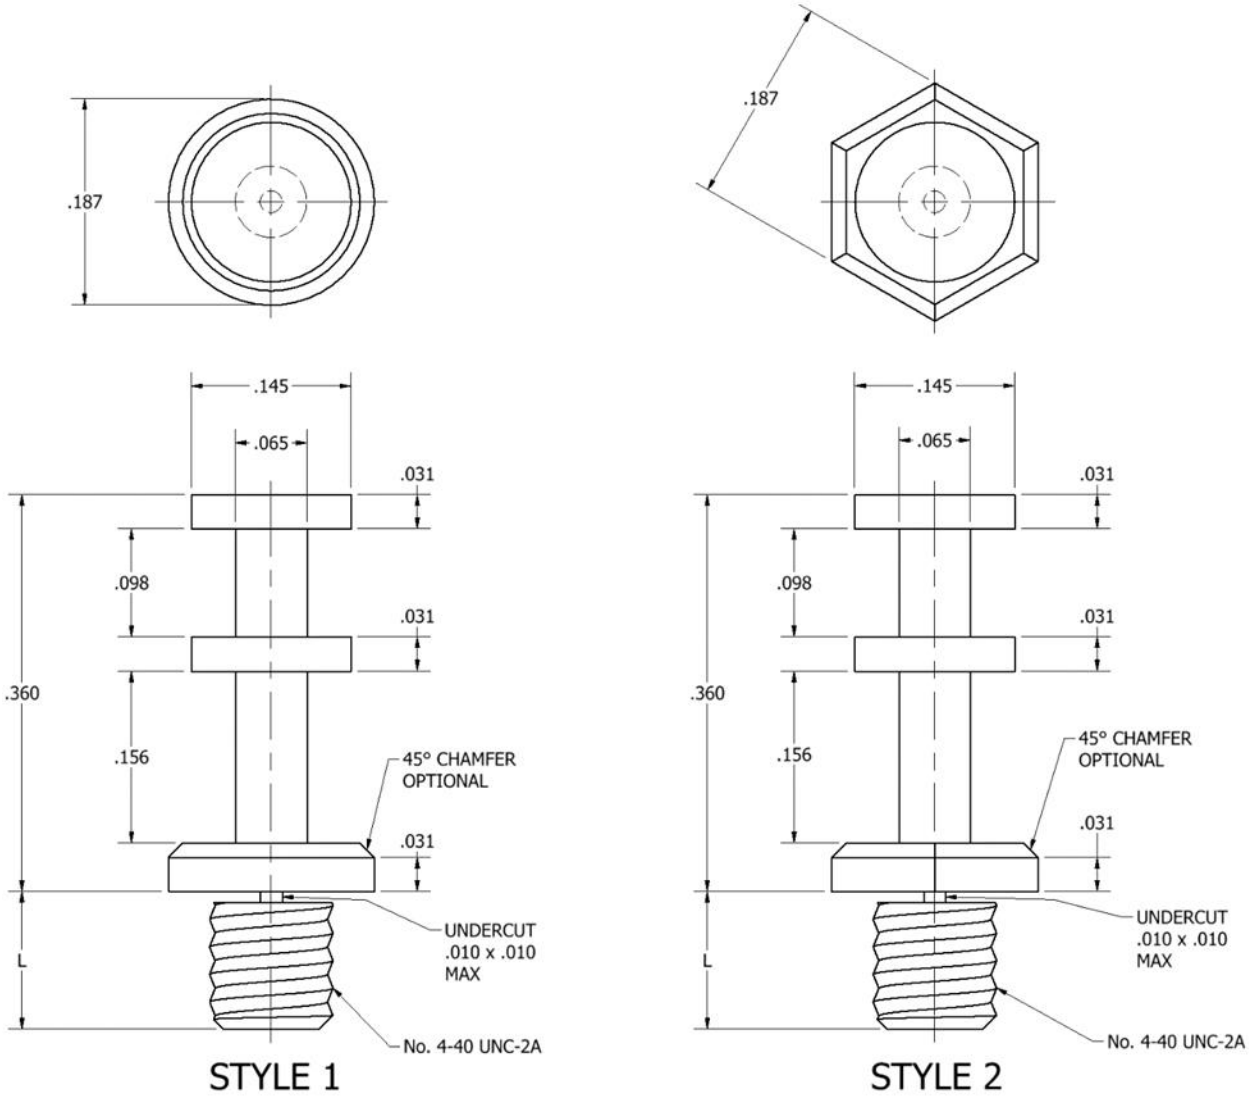


FIGURE 1. Threaded double turret stud terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

3.3.1 Threads. The stud shall be threaded in accordance with ASME Standard B1.1, unified inch screw thread UNC-2A no. 4-40.

3.4 Workmanship. All surfaces shall be smooth and free of burrs and sharp edges.

3.5 Finish. The finish shall consist of a tin plate, Type I, (0.0003 min.) per ASTM Standard B545 or Type II (0.0001 min) per ASTM Standard B339 or equivalent.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror or contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.


5.2 Market acceptability. Similar items must have been sold in the commercial market or to the Government. The offeror or contractor shall certify and provide supporting documentation as to the serviceability and the long-term (5 years) availability of all necessary maintenance and logistics support parts and materials.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3(c)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

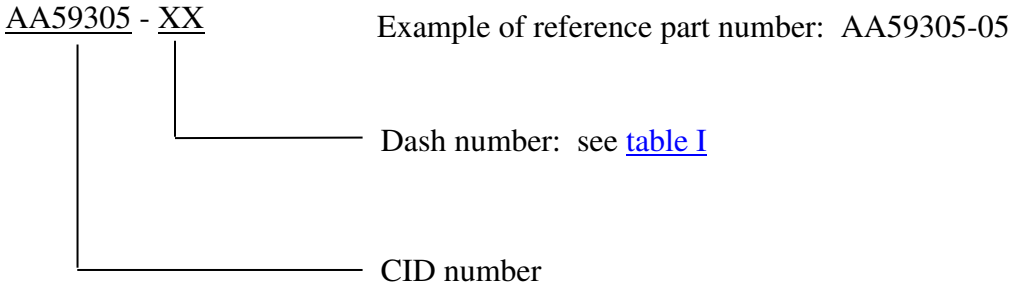

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

7.2 Sources of documents.

7.2.1 FAR. Electronic copies of FAR documents may be obtained from https://www.acquisition.gov/far/.

7.2.2 ASTM standards. Electronic copies of ASTM standards may be obtained from https://www.astm.org/.

7.2.3 ASME standards. Electronic copies of ASME standards may be obtained from https://asme.org/.

7.3 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN
b. Dash number (see 2.1)
c. Packaging (see 6.1)

7.4 National Stock Numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

5940000824971
5940007010287
5940009031332
5940009055016
5940010041974
5940011484596

7.5 Subject term (key word) listing.

brass
tin
turret

7.6 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

APPENDIX A

3D Model (Style 1) for reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

APPENDIX A

3D Model (Style 2) for reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - AS
DLA - GS

Preparing Activity:
DLA – GS4

(Project 5940-2019-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:09Z
Check the source to verify that this is the current version before use.