MIL-P-45859B(ME)
21 July 1978
SUPERSEDING
MIL-P-45859A(ME)
5 May 1971

MILITARY SPECIFICATION

POP-VALVE-TEST

BENCH ASSEMBLY

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a pneumatic pop-valve-test bench assembly for testing air-compressor components at pressures up to 6,000 pounds per square inch gage (psig).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

FSC 4940

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-698	- Steel, Sheet and Strip, Low Carbon.
QQ-S-741	- Steel, Carbon: Structural Shapes; Plates; and Bars.
QQ-S-781	- Strapping, Steel, and Seals.
RR-C-901	- Cylinders, Compressed Gas: With Valve or Plug and Cap; ICC 3AA.
GGG-V-410	- Vise, Bench, Clamp Base, Sheet Metal Worker S, Bench and Pipe, Jewelers S, Machinist S and Multiposition.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-P-40	- Packaging and Packing of Hand Tools.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-R-2765	- Rubber, Sheet, Strip, Extruded, and Molded Shapes, Synthetic, Oil Resistant.
MIL-T-16420	- Tube, 70-30 and 90-10 Copper-Nickel Alloy, Seamless and Welded.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS39224	- Cylinder, Compressed Gas: DOT Specification 3AA.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:00Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directecd by the contracting officer.)

2.2 Other Duplications. The followiing documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H28 - Screw-Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D2473 - Polycarbonate Plastic Molding, Extrusion, and Casting Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

3. REQUIREMENTS

3.1 Description. The test bench assembly shall. consist of a bench, vise, water tank, pressure amplifier, gas cylinder, safety shield, gages, test blocks with adapters, and hose.

3.2 First article. The contractor shall furnish one or more test benches for examination and testing within the time frame specified, to prove that his production methods and choice of design detail will produce test benches that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.7).

3.3.1 Sheet steel. Sheet steel shall conform to QQ-S-698, Composition F's 1015 - FS 1020, condition and temper optional.

3.3.2 Structural steel. Structural steel shall conform to QQ-S-741.

3.3.3 Rubber sheet. Rubber sheet shall conform to MIL-R-2765.

3.4 Bench. The bench shall consist of a top, legs, back and end stops, shelf, stringer, and drawers. The nominal dimensions of the bench, excluding the back and end stops, shall be 34 inches high 34 inches wide, and 72 inches long. The bench shall withstand a uniformly distributed load of 1,800 pounds without any visual deflection, permanent deformation, or breakage.

3.4.1 Top. The top shall be made of sheet steel, shall have rounded corners, and shall have edges formed into a channel to provided reinforcement and rigidity. The top shall serve as a base for the vise and manifold and shall be bolted to the legs. The top shall be reinforced by a 1/2-inch by 12-inch by 12-inch steel plate on the underside of the top for the vise mounting. The top shall be covered with a rubber sheet having a minimum thickness of 1/8 inch.

3.4.2 Legs. The legs shall be made of steel, and shall have steel crossmembers welded between them for attaching the top and shelf. Holes shall be punched in the back legs for bolting the stringer. The legs shall be provided with flared feet which shall not extend beyond the edge of the top. One or more holes, each 7/16 inch diameter, shall be drilled or punched in the feet for attaching to the floor.

3.4.3 Stringer. The stringer shall be made of channel-type steel and shall be bolted to the back legs.

3.4.4 Stops. The back and end stops shall be steel. The back stop shall extend 3 inches above the top. The end stops shall be tapered from 3 inches at the back to 1-1/2 inches at the front, The front corners shall be rounded.

3.4.5 Shelf. A steel shelf, 3/16 inch thick, 14 inches wide and 72 inches long shall be attached to the front legs and crossmembers. The front edge of the shelf shall be provided with a l-inch flange for attaching to the legs and to provide additional rigidity. The shelf shall be equipped with a cylinder stop 9 inches long and located 58

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

inches from the right end of the shelf. Two cylinder guides, not less than 4 inches long shall be welded to the shelf. The guides shall be located 9 inches apart, midway between the cylinder stop and the right end of the shelf. The cylinder stop and guides shall be fabricated of 1-1/2- by 1-1/2- by 3/16-inch angle.

3.4.6 Instrument turret. An instrument turret, fabricated of steel not less than 0.0598 inch in nominal thickness shall be provided and mounted against the backstop of the bench. The turret shall contain the pneumatic amplifier, receiver, gages, valves, and associated piping. The rear panel of the turret shall be removable to provide access to the components.

3.4.7 Drawers. Two metal drawers, each 20 inches wide, 20 inches long, and 5 inches high (inside dimensions), shall be attached to the underside of the top. Drawers shall operate on nylon glides or roller bearings. Each drawer shall be equipped with an automatic stop, a sliding tray, and a padlock attachment or a built-in, tumbler-type lock. Each drawer shall withstand a uniformly distributed load of 1.00 pounds without visual deflection, permanent deformation, or breakage.

3.5 Vise. A machinist-type vise conforming to GGG-V-410, Type VI, Class 2, jaw width 4-1/2 inches, shall be mounted on the front of the bench 12 inches from the manifold end of the bench.

3.6 Water tank. A water tank, 12 inches wide, 12 inches deep, and 24 inches long shall be provided and mounted on the left end of the bench; with the top of the tank flush with the top of the bench. The tank shall be fabricated of hot dip galvanized steel not less than 0.0598 inch in nominal thickness and shall be equipped with a drain and drain valve.

3.7 Safety shield. A safety shield shall be furnished. The shield shall be made of polycarbonate resin conforming to ASTM D2473, Type I, Grade 1, Class A; and shall be cylindrical. in shape and of sufficient diameter to slide over the vise. The shield shall be mounted on a suitable stand that will permit the shield to be lowered over the vise or raised and swung out of the way when not in use.

3.8 Pneumatic system. The pneumatic system shall be arranged as shown in Figure 1.

3.8.1 Pneumatic amplifier. The pneumatic amplifier shall consist of a differential-area piston, high pressure check valves, and a three-way cycling valve. The amplifier piston shall have a differential-area ratio of not less than 3.5 to 1, and when operated through the three-way cycling valve, shall increase the source pressure 3.5 times. High

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

pressure check valves shall control the flow of gases through the amplifier. The amplifier shall operate on teflon seals and shall require no lubrication. The amplifier shall include a 5-cubic-inch capacity receiver to permit precharging of the system before beginning high pressure tests.

3.8.2 Gas regulator. The gas regulator shall be hand operated and shall maintain any selected pressure within the operating range without readjustment. The regulator shall be capable of receiving pressure at 2,265 psig and maintaining any selected pressure between 0 and 1,200 psig with a pressure rise of not more than 1 percent of the initial set pressure in a period of 5 minutes. The regulator shall be equipped with two gages to indicate the source pressure and the regulated pressure. The source pressure gage shall have a scale range of 0-3,000 psi, graduated in 100 psi increments and numbered in 500 psi increments. The regulated pressure gage shall have a scale range of 0-1,500 psi, graduated in 50 psi increments and numbered in 250 psi increments.

3.8.3 Filter. A 10 micron filter with a replaceable element shall be installed in the system, between the gas cylinder and the source pressure gage.

3.8.4 Gas cylinder. A gas cylinder conforming to RR-C-901, Type IV, Class 2, MS39224-7 shall be furnished and mounted on the shelf.

3.8.5 Gas supply line. The gas supply line shall be fabricated of tubing conforming to MIL-T-16420, Composition 70-30, Type I, Class 3300, 1/4 inch OD. The ends of the tubing shall be fitted with nipples No. 583 and hex nuts No. 584 in accordance with Handbook H28. An adapter shall be furnished to connect the supply at the filter. The supply line shall be clamped to the underside of the work bench top.

3.8.6 Valves. Three micrometering valves shall be installed in the system. Two shall control the high and low pressure gas into the gage manifold and one shall vent the system. The valves shall be equipped with replaceable nylon seats.

3.8.7 Test gages. Four test gages of 0-30 psi, 0-600 psi, 0-3,000 psi, and 0-10,000 psi pressure ranges shall be furnished and mounted in the turret. The gages shall be mounted on a common manifold and individually protected by a gage cutout. When the pressure exceeds the value of one gage, it shall be automatically cut out of the system, and readings indicated on the next higher gage. The gages shall be not less than 4-1/2 inches in diameter and shall be equipped with a blow-out disc to relieve case pressure in the event of tube failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

3.8.7.1 Gage accuracy. Gages shall be accurate to within 1-1/2 percent of the maximum scale reading; except that the mid-range accuracy, between 30 and 70 percent of the maximum scale reading, shall be within 1/2 of 1 percent. These requirements shall not apply below 5 percent of the maximum scale reading.

3.8.8 Hose. A hose shall be provided and connected to the pressure port of the gage manifold. The hose shall be 1/4 inch nominal outside diameter and shall have a minimum inside bend radius of 3-1/4 inches. The hose shall be rated at 6,000 psig minimum working pressure, proof-tested to 12,000 psig with a minimum burst pressure of 24,000 psig, The hose shall be of sufficient length to reach the vise and water tank, and shall terminate with a high pressure quick-disconnect socket with a protective dust plug. The dust plug shall be attached to the socket with a captive chain.

3.8.9 Test blocks. Test blocks shall be furnished to accommodate valves of the following National Pipe Thread (NPT) sizes: 1/4-inch, 3/8-inch, 1/2-inch, 3/4-inch, 1-inch, 1-1/4-inch, 1-1/2-inch, 2-inch, 2-1/2-inch, and 3-inch, Each block shall be equipped with a high pressure quick-disconnect nipple with a captive dust plug.

3.9 Identification marking. The test bench shall be identified in accordance with MIL-STD-130. The marking shall be applied to the test bench on plates conforming to MIL-P-514, Type I, Style 3, Composition C, of Type I, Grade A, Class 1 material. Plates shall be attached by screws, bolts, or rivets in a location where the plate will be both legible and visible.

3.10 Instruction plates. Each test bench shall be equipped with instruction plates including brief operating instructions, warnings, cautions, and important procedures to be followed in assembling and operating the test bench. Instruction plates shall conform to MIL-P-514, Type 111, Composition C, of Type I, Grade A, Class 1 material. Plates shall be attached by screws, bolts, or rivets in a location where the plate will be both legible and visible.

3.11 Treatment and painting. The portions of the test bench normally painted, shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:00Z
Check the source to verify that this is the current version before use.

3.12 Workmanship.

3.12.1 Metal fabrication. Metal used in fabrication shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Corners shall be square and true. Flame cutting, using tips suitable for the thickness of the steel may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated steel shall be allowed to cool slowly. External surfaces shall be free of burrs, sharp edges and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.12.2 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, and other foreign matter other than mill scale that can be removed by chipping and wire brushing. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parent materials, weld filler metals, and fabrication techniques shall be as required to enable the test bench to conform to the examination and test requirements specified in Section 4. Parts to be joined by fillet welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch, unless appropriate bridging techniques are used. The welding process used in fabrication of the test bench shall be at the option of the contractor.

3.12.3 Bolted connections. Boltholes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where necessary. Matching thread areas securing bolts conforming to SAE J429 or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement.

3.12.4 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member, and shall be in accordance with SAE J492.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The. inspection requirements specified herein are classified as follows:

(a) First article test bench inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First article test bench inspection.

4.3.1 Examination. The first-produced test bench shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection,

4.3.2 Tests. The first-produced test bench shall be tested as specified in 4.5.2.1 through 4.5.2.3. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each test bench shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each test bench shall be tested as specified in 4.5.2.2 and 4.5.2.3. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The test bench shall be examined for the following defects:

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:00Z
Check the source to verify that this is the current version before use.

Critical

1. Safety shield not as specified.

Major

101. Assembly not complete or incorrect.
102. Parts or components do not function.
103. Material not as specified.
104. Identification and instruction plates missing or illegible.
105. Instructional material, repair parts or maintenance tools missing.
106. Treatment and painting not as specified.
107. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Static load. Place a uniformly distributed load of 1,800 pounds on the top of the bench and 100 pounds in each of the two drawers for 10 minutes. Any permanent deformation, cracking, or breaking shall constitute failure of this test.

4.5.2.2 Low pressure pneumatic test. Adjust the regulator to a pressure of 10 psig and hold for 5 minutes. Then readjust the regulator to a pressure of 600 psig and hold for 5 minutes. Finally adjust the regulator to a pressure of 1,200 psig and hold for 5 minutes. Leakage at the cylinder connection, filter, or regulator; or failure of the regulator to maintain the set pressure within 1 percent for 5 minutes shall constitute failure of this test.

4.5.2.3 High pressure pneumatic test. Operate the three-way cycling valve and percharge the amplifier receiver to 6,000 psig. Attach the small test block to the test connection and plug the test block. slowly bleed the receiver pressure through the gage manifold to the test block, observing the operation of the gage cutouts. Failure of the amplifier to increase the source pressure to 6,000 psi, malfunction of the gage cutouts, leakage or inability of any component to withstand the applied pressure shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection.

4.6.1.1 Examination. Examine the preproduction pack for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

108.	Materials, methods, or containers not as specified. Each incorrect material, method, or container shall be considered one defect.
109.	Disassembly not as specified.
1100	Water tank drain valve not in open position.
111 l	Gas cylinder not secured in place as specified.
112.	Safety shield, when removed, not preserved as specified.
113.	Repair parts not preserved as specified.
114 l	Maintenance tools not preserved as specified.
115.	Consolidation not as specified.
116.	Contents not blocked, braced, and anchored as specified.
117.	Strapping not as specified.
118.	Marking missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing and marking comply with the packaging requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.4). The preproduction pack may be prepared utilizing either the preproduction model or a production bench assembly. When the preproduction model is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government to facilitate comparison between the preproduction model and production bench assemblies.

5.2 Presentation. Preservation shall be Level A or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:00Z
Check the source to verify that this is the current version before use.

5.2.1 Level A.

5.2.1.1 Disassembly. Disassembly shall be the minimum necessary to safeguard parts vulnerable to damage and to the removal of protruding parts that would otherwise increase cubage. Removed bolts, nuts, and washers shall be placed in one of the mating parts and secured to prevent loss or preserved together in accordance with MIL-P-116, Method IC-1 or IC-3 and placed in the drawer. The water tank drain valve shall be placed in the open position.

5.2.1.2 Test blocks and adapters. The test blocks and adapters shall be individually preserved in accordance with MIL-P-116, Method IC-1 or IC-3.

5.2.1.3 Cylinder. The gas cylinder shall be secured in place, in a manner to prevent movement or damage.

5.2.1.4 Safety shield. The safety shield, when removed, shall be preserved in a close-fitting box conforming to PPP-B-636, W5c, style optional. The contents shall be cushioned and blocked within the box to prevent movement and damage.

5.2.1.5 Instructional material. Instructional material for each bench assembly shall be preserved together in accordance with MIL-P-116, Method IC-1 or IC-3.

5.2.1.6 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve the repair parts.

5.2.1.7 Maintenance tools. Maintenance tools shall be preserved in accordance with the Level A requirements of PPP-P-40.

5.2.1.8 Consolidation. Small loose components and parts shall be placed in the drawers and cushioned and blocked in a manner to prevent movement and damage. The drawers shall be closed and secured to prevent opening during shipment. Loose components and parts that will not fit within the drawers and require the protection afforded by a fiberboard box shall be preserved in a close-fitting box conforming to PPP-B-636, Type CF, Class Weather Resistant, Variety SW, grade as applicable to the weight of contents, style optional. The contents shall be cushioned and secured to prevent movement and damage. The box shall be secured to the bench in a protected location or to the base of the box specified in 5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

5.2.2 Commercial. Each complete bench assembly shall be preserved in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be Level A, Level B or Commercial as specified (see 6.2).

5.3.1 Level A. Each complete bench assembly shall be packed in a close-fitting box conforming to PPP-B-601, Overseas Type, Style A or B. The contents shall be blocked, braced, and anchored within the box in a reamer to prevent movement and damage in accordance with MIL-STD-1186. Strapping shall conform to QQ-S-781, Class 1, Type I or IV size as applicable. Unless otherwise specified (see 6.2) strapping shall be Finish B. When specified (see 6.2) strapping shall be Finish A.

5.3.2 Level B. Each complete bench assembly shall be packed as specified in 5.3.1 for Level A except boxes shall be domestic type and strapping shall be Finish A.

5.3.3 Commercial. Each complete bench assembly shall be packed in accordance with MIL-STD-1188.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The bench assembly is intended for use in testing valves, hoses, gages, and other compressor components.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first-produced test bench (see 3.2).
(c) The frame required for submission of the preproduction pack (see 5.1).
(d) Degree of preservation and degree of packing required (see 5.2 and 5,3).
(e) When Finish A strapping is required (see 5.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

6.3 First article test bench. Any changes or deviations of production test benches from the approved first-produced test bench during production will be subject to the approval of the contracting officer. Approval of the first-produced test bench will not relieve the contractor of his obligation to furnish test benches conforming to this specification.

6.4 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack and mark the bench assemblies in accordance with this specification.

6.5 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each test bench.

6.6 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions regarding shipment of test benches.

6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 4940-A405

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

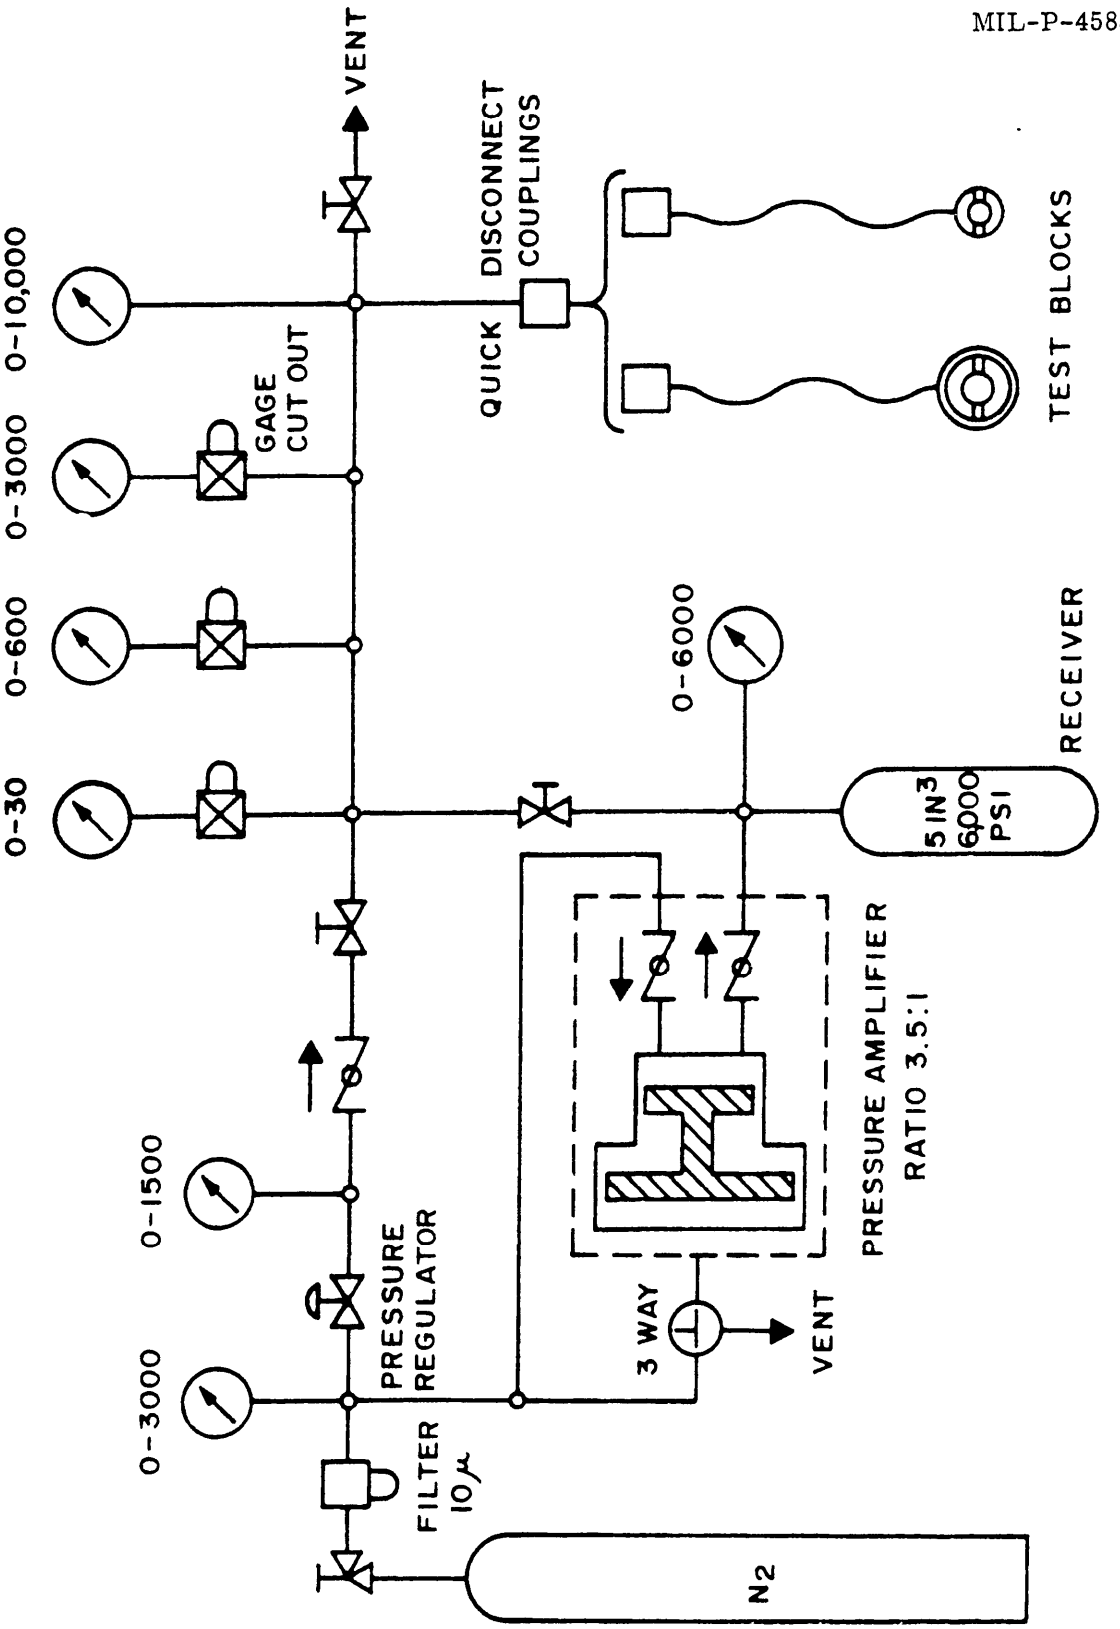


FIGURE 1
PNEUMATIC SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

MIL-P-45859B(ME) Pop-Valve-Test Bench Assembly

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:00Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research
and Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:00Z
Check the source to verify that this is the current version before use.