MIL-G-45811C(ME)
14 August 1984
SUPERSEDING
MIL-G-45811B(ME)
15 January 1974

MILITARY SPECIFICATION

GAGE, AIR, LOW PRESSURE,

PNEUMATIC FLOATING EQUIPMENT

This specification is approved for use by the Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a direct-reading gage calibrated to read air pressures up to 10 pounds per square inch (psi).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5420

Source: https://assist.dla.mil -- Downloaded: 202640-22T03:56Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-A-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys.
MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B 456	- Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium.
ASTM D 2000	- Rubber Products in Automotive Applications.
ASTM D 3951	- Standard Practice for Commercial Packaging
ASTM E 380	- Metric practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The gage shall be as shown in figure 1 and as specified herein. It shall consist of a tubular body containing a graduated indicator bar actuated by air pressure applied through a chuck-type air inlet.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor, shall be compatible with the intended use, and shall be subject to all provisions of this specification.

3.3.1 Material deterioration and control. The gage shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize or prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as a corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available, upon request, to the contracting officer or designated representative.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:56Z
Check the source to verify that this is the current version before use.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the gage may be newly fabricated from recovered materials to the maximum extent practicable, provided the gage produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the gage.

3.3.3 Coating and anodizing. Brass and bronze shall be nickel-chromium coated in accordance with ASTM B 456, service condition SC 3, finish optional. Aluminum shall be anodized to a thickness of 0.0007 inch in accordance with MIL-A-8625, type II, class 1.

3.4 Characteristics. The gage shall withstand a pressure of 20 psi applied through the air inlet without cracking, rupture, permanent deformation or other damage and without affecting subsequent accuracy. The gage shall weigh not more than one-half pound. All functioning surfaces of the gage shall be smooth and free from tool marks and extraneous materials. Exterior surfaces shall be free of any sharp edges or projections, and required edges shall be broken with a radious or chamfer, as applicable.

3.5 Body. The body shall be brass, bronze, or aluminum at the contractor's option and shall incorporate a guide for the indicator bar.

3.6 Indicator bar. The indicator bar shall be aluminum or nylon at the contractor's option, and shall be square in cross section. The bar shall be graduated from 1 psi to 10 psi in increments of 1/2 psi. Pound increments shall be numbered as shown on figure 1. The other two sides should be marked in the International system of units (SI) in accordance with ASTM E 380. The SI metric marking shall be in units of kilopascal (kPa). The SI marking shall be in red for ease of identification and shall be graduated in 5 kPa increments with numeric marking every 10 kPa reading from 10 to 70 kPa minimum range. Numerals shall be not less than 1/8 inch high. Graduations and numerals shall be on all four sides and shall be clear cut and well defined, providing contrast between the markings and the bar. The pressure readings shall be taken directly from the indicator bar at the plane of emergence from the body. When applicable, the aluminum indicator bar shall include a spring to return the bar to the zero-pressure position when air pressure is removed from the air inlet. The spring shall be corrosion-resistant metal or metal treated to resist corrosion. The use of the return spring is optional with the nylon bar, when applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:56Z
Check the source to verify that this is the currentversion before use.

3.7 Air inlet. The air inlet shall be the chuck-type as shown on figure 1. The metal portion of the chuck shall be the same material as the body. The chuck shall include a cured polychloroprene synthetic rubber chuck foot bonded to the metal. The rubber shall conform to ASTM D 2000, grade 2BC510A14B14C12. The air inlet shall have a screen or other filtering device to prevent foreign particles from entering and damaging the gage.

3.8 Internal mechanism. All parts of the internal mechanism shall be of corrosion-resisting material, and shall be electrolytically compatible with other materials.

3.9 Drop resistance. When subjected to the test specified in 4.5.2.2, the gage shall show no evidence of rupture, cracking or permanent deformation.

3.10 Accuracy. The gage shall be accurate within 1/2 psi at all pressures from 1 psi to 10 psi throughout a temperature range of 10° F to 125° F.

3.11 Identification marking. Each gage shall be identified in accordance with MIL-STD-130 and the marking shall be located as shown on figure 1.

3.12 Workmanship. The gage shall be free of any defects which could impair the operation and accuracy of the gage. The body of the gage shall be smooth and free from sharp edges. The metal portion of the chuck shall be free of sharp edges or protrusions; and the rubber chuck foot shall be smooth and free from mold marks or other defects that could adversely affect performance of the gage. The indicator bar shall not bind in the body.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined and tested in accordance with referenced specification and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article gage shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first article gage and material representative of that used in the rubber chuck foot shall be tested as specified in 4.5.2 through 4.5.2.5. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling.

4.4.1.1 For examination. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.1.2 For tests. Sampling for tests shall be in accordance with MIL-STD-105, inspection level S-2.

4.4.2 Examination. Samples selected in accordance with 4.4.1.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

4.4.3 Tests. Samples selected in accordance with 4.4.1.2 shall be tested as specified in 4.5.2 through 4.5.2.4, except that the accuracy test (4.5.2.4) shall be conducted only at 70° F. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The gages shall be examined as specified herein for the following defects:

101. Components not as specified.
102. Dimensions not as specified.
103. Material not as specified.
104. Materials are not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment.
105. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:56Z
Check the source to verify that this is the current version before use.

106. Contractor does not have documentation available for identification of material, material finishes or treatments.
107. Used, rebuilt, or remanufactured components, pieces, or parts incorporated in the gage.
108. Finish not as specified.
109. Weight not as specified.
110. Graduations and numerals on indicator bar not as specified, missing, or not clear cut and well defined.
111. Identification marking not as specified.
112. Workmanship not as specified.

4.5.2 Tests. The gage shall be subjected to the following tests for overpressure, drop resistance , and endurance in the sequence listed. After completion of each test the gage shall be subjected to the accuracy test specified in 4.5.2.4.

4.5.2.1 Overpressure test. The gage shall be subjected to a pressure (air or nitrogen) of 20 psi applied through the air inlet. Nonconformance to 3.4 and to 3.10 shall constitute failure of this test.

4.5.2.2 Drop resistance test. The gage shall be dropped on its side four times and on each end two times from a height of 4 feet into a hard concrete surface. Nonconformance to 3.9 and to 3.10 shall constitute failure of this test.

4.5.2.3 Endurance test. The gage shall be actuated by the application of air pressure of 5 to 10 psi, and the indicator bar closed after each application of air, for not less than 300 gaging operations or cycles. The gaging operations or cycles shall be conducted at a rate of 20 to 40 per minute. Any damage to the gage, inability to operate or nonconformance to 3.10 shall constitute failure of this test.

4.5.2.4 Accuracy test. The gage shall be subjected to pressure (dry air or dry nitrogen) ranging from 0 to 10 psi. The gage shall be calibrated against a mercury manometer (corrected to standard conditions) connected to the same pressure source. Calibration readings shall be taken from 0 to 10 psi and from 10 psi to 0. Pressure readings shall be recorded at each 1-psi interval. Calibration readings shall be taken at gage temperatures of 70° F, 10° F, and 125° F. The gage shall be conditioned at the test temperature for not less than 1 hour prior to taking readings. Readings of the gage not matching the readings of the mercury manometer within 1/2 psi shall constitute failure of this test.

4.5.2.5 Rubber chuck foot. Nonconformance of the rubber chuck foot to the requirements of 3.7 shall constitute rejection of the air inlet assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:56Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects.

113.	Preservation not as specified for level A.
114.	Quantities consolidated together not as specified for level A.
115.	Consolidation boxes not closed and sealed as specified for level A.
116.	Preservation and packing not in accordance with the referenced document as specified for commercial.
117.	Gross weight exceeds 200 pounds for level A.
118.	Strapping not as specified for level A.
119.	Marking missing, illegible, incorrect, or incomplete for level A, B, or commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each gage shall be preserved in accordance with MIL-P-116, method IC-1, or IC-2 if the gage is furnished in the manufacturer's container.

5.1.1.1 Consolidation. Gages preserved as specified in 5.1.1 shall be consolidated together, in quantities of 20, in a close fitting box conforming to PPP-B-636, W6c. The box shall be closed and secured in accordance with method V of the appendix to the box specification.

5.1.2 Commercial. Gages shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, level B, or commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Gages, preserved as specified in 5.1, shall be packed together in a close-fitting box conforming to PPP-B-601, overseas type, style optional, in quantities not to exceed 200 pounds. Box closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall conform to QQ-S-781, class I, type I or IV, size as applicable. Unless otherwise specified, strapping shall be finish B (see 6.2). When specified (see 6.2), strapping shall be finish A.

5.2.2 Level B. Gages, preserved as specified in 5.1, shall be packed together in a close-fitting box conforming to PPP-B-636, V3c, style optional. The gross weight or size of the box shall not exceed the limitations of the box specification. The box shall be closed and secured in accordance with the appendix to the box specification.

5.2.3 Commercial. Gages shall be packed in accordance with ASTM D 3951.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection (level A or B) shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall be in accordance with ASTM D 3951.

6. NOTES

6.1 Intended use. The gage is intended for use in measuring air pressure in low pressure (1 to 10 psi) pneumatic equipment such as ponton bridge floats, bridge erection rollers, reconnaissance boats, and assault boats.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article is required for inspection and approval and the number of units required (see 3.2).

c. Degree of preservation and degree of packing required (see 5.1 and 5.2).

d. When other than finish B strapping is required (see 5.2.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

Custodian:
Army - ME

User activity:
Army - AT

Preparing activity:
Army - ME

Project 5420-A335

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

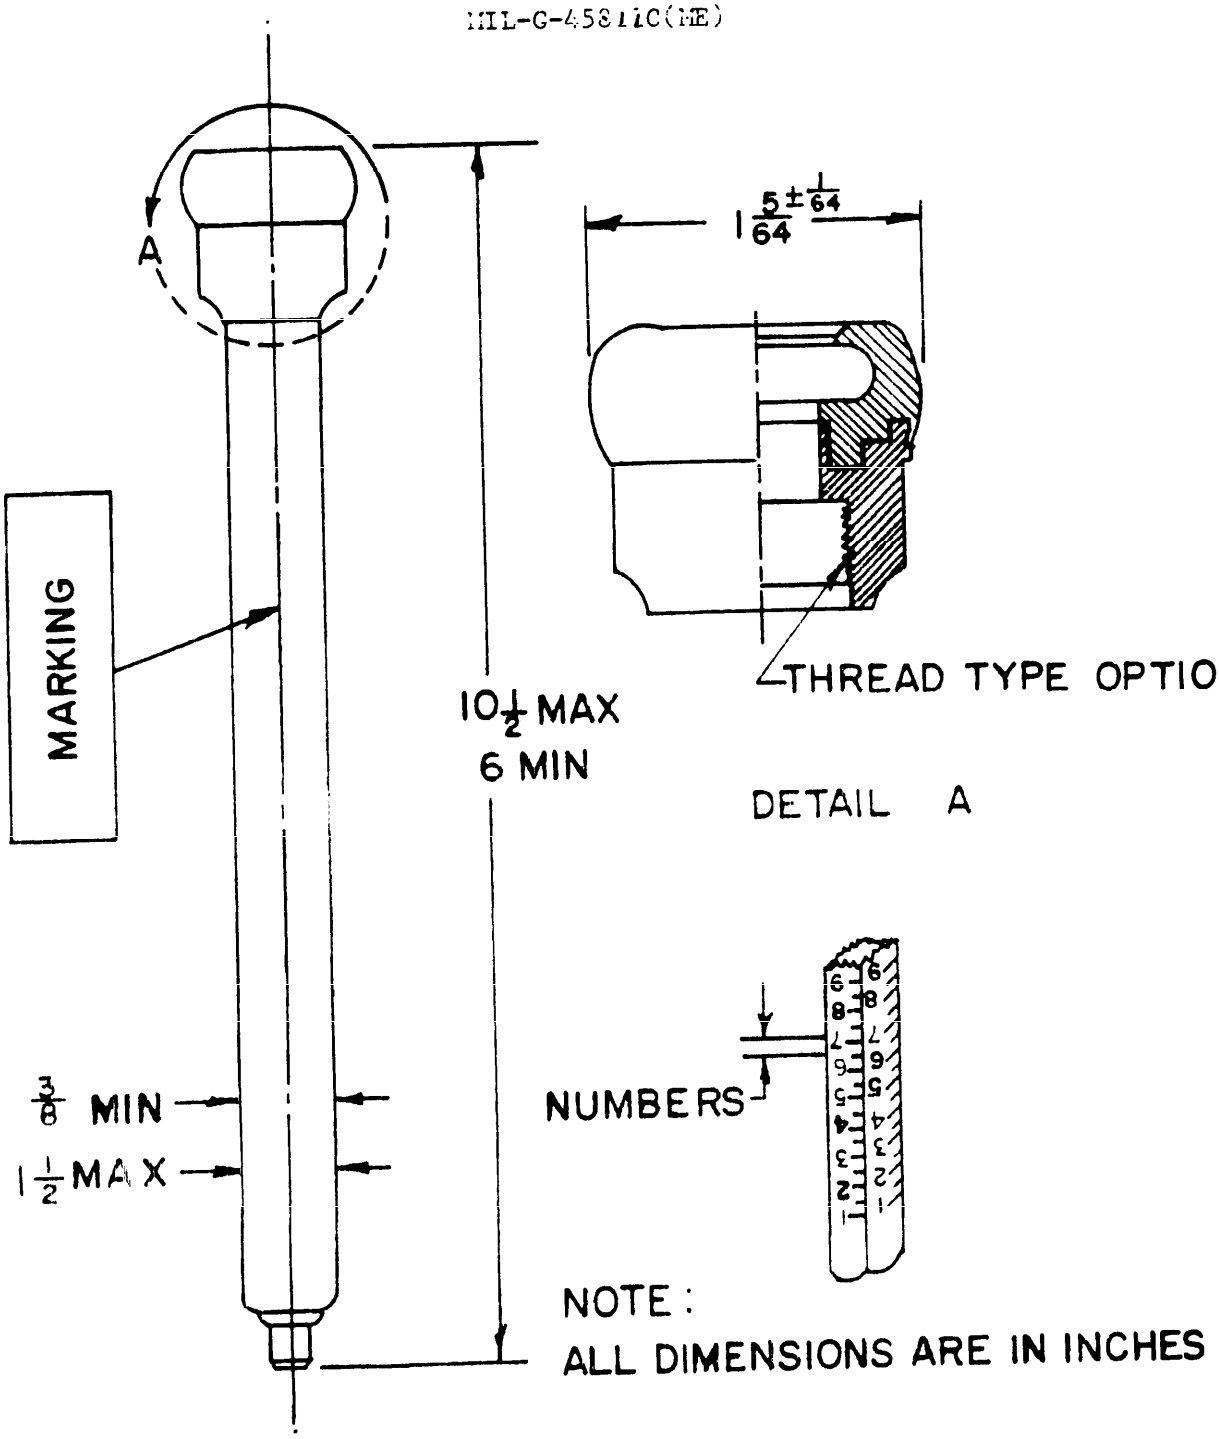


FIGURE 1. Low pressure gage.

X-2463B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-G-45811C(ME)	Gage, Air, Low Pressure, Pneumatic Floating Equipment

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5606

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Belvoir R&D Center
STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 202640-22T03:56Z
Check the source to verify that this is the current version before use.