MIL-M-45874(PA)
9 June 1975
SUPERSEDING
See Section 6

MILITARY SPECIFICATION

MOVEMENT ASSEMBLIES, TA and TB, for M75 AK SURFACE-TO-SURFACE PLUG

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of timing movement assemblies entitled Movement Assembly, TA and Movement Assembly, TB which is used on the Nike Hercules warhead section.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1168	- Lot Numbering of Ammunition.
MIL-STD-1169	- Packaging, Packing and Marking of Inert Ammunition Components.

DRAWINGS

ORDNANCE CORPS

8804174 - Plate Assembly.
8804175 - Plate Assembly.
8804179 - Movement Assembly, TB.
8804180 - Movement Assembly, TA.
8804214 - Gear Number 1 and Pinion Number 1 Assembly.
8804215 - Gear Number 2 and Pinion Number 2 Assembly.
8804216 - Escape Wheel Assembly.
8804217 - Center Gear and Arbor Assembly.
8804221 - Arbor.
8804223 - Barrel.
8804225 - Pallet Assembly.
8804252 - Cam Assembly TA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

8804253 - Cam Assembly TB.
EL-8828969 - Equipment Lists.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The TA and TB movements shall comply with all requirements specified on the drawing (dwg) 8804179 and 8804180, with all requirements specified herein, an with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Serialization. The contractor shall assign serial numbers as required by drawings. The contractor may select any number which complies with the drawing requirement. These numbers shall not be duplicated. The type movement (TA and TB) shall be readily identified by its serial number.

3.5 Initial regulation. Movement shall be regulated to an advisory beat rate of 220 plus or minus (±) 0.5 beats per second, when tested as specified in 4.4.1.

Note: One cycle or the advance of one tooth on Escape wheel equals two beats.

3.6 Mainspring torque. Using Arbor 8804221 and Barrel 8804223 (or equivalent fixture) mainspring must deliver a torque of 18 inch ounce maximum when unwound 90° from fully wound position to 12 inch ounce minimum at 450° unwound position as specified in 4.4.2.

3.7 Torque escapement starting and operating. The maximum torque, measured at the output shaft, required to start the escapement shall not exceed 8 inch ounces. The maximum torque, measured at the output shaft, required to sustain operation shall not exceed 4 inch ounces. These shall be tested as specified in 4.4.3.

3.8 Gear train proof load. With pallet restrained from oscillating, apply torque to the output shaft in the timing direction, starting at 35 inch ounces. The load shall be increased until failure takes place within the movement assembly. This shall be tested as specified in 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

3.9 Environmental testing. The movement assemblies shall comply with MIL-STD-810, visual inspection and failure criteria, section 3. The movement assemblies shall also comply with 3.7 and 3.8 before and after each environmental test. Testing shall be as specified in 4.4.5. Tests shall be conducted in the order specified.

3.9.1 Vibration. The movement assemblies shall be capable of operating after subjection to vibrations in any direction with frequencies varying from 5 to 500 Hertz (Hz) when tested as specified in 4.4.5.1.

3.9.2 Shock. The movement assemblies shall be capable of withstanding impact shocks of 60 g's without evidence of machanical damage when tested as specified in 4.4.5.3.

3.9.3 Acceleration. The movement assemblies shall be capable of withstanding a constant acceleration of 50 g's for at least 10 seconds minimum without evidence of mechanical damage when tested as specified in 4.4.5.3.

3.10 Dimensions and tolerances. Dimensions and tolerances which affect external profile, functioning, safety, or which affect assembly with components external to the movement are mandatory. Inspection requirements for these dimensions and tolerances are included under section 4 of this purchase description. All other requirements of drawings and specifications, including basic design and geometry of each component part are mandatory, (see 6.4).

3.10.1 Dimensions and tolerances. Dimensions and tolerances which deviate from drawings shall be recorded on the basis of applicability to each movement lot submitted for acceptance and this record shall be forwarded to the responsible Industrial Engineering Division (APSA who will forward it to PA) for evaluation and record purposes.

3.11 Workmanship.

3.11.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.11.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.11.3 Burrs. Parts shall be free from burrs.

3.11.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.11.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent. Before assembly, all parts shall be vapor degreased with Trichlorethylene or approved equivalent. Parts are not to be dipped into solution, but suspended above so that vapor condensation can form and run off of parts. Parts and assemblies shall be stored in dust proof containers when not in an operation phase, and assembly and testing shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

take place in an atmoshpere free from large dust particles, metal filings, or other contaminants.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 5 complete assemblies (see dwg 8804179 and 8804180) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I
First article inspection and tests

Inspection or Test	Dest	Non Dest
1. Classification of characteristics (see 4.3.2.1.)		X
2. Initial regulation (see 3.5)		X
3. Mainspring torque (see 3.6)		X
4. Torque-escapement starting and operating (see 3.7)		X
5. Gear train proof load (see 3.8)	X	
6. Vibration (see 3.9.1)	X	
7. Shock (see 3.9.2)	X	
8. Acceleration (see 3.9.3)	X	

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table II and Table III), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

Table II
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	140-141	124	256-259	177	541-549	230
73	72	142	125	260-262	178	550-559	231
74	73	143-144	126	263-265	179	560-569	232
75	74	145	127	266-268	180	570-579	233
76	75	146-147	128	269-271	181	580-590	234
77	76	148-149	129	272-275	182	591-601	235
78	77	150	130	276-278	183	602-613	236
79	78	151-152	131	279-282	184	614-625	237
80	79	153-154	132	283-285	185	626-637	238
81-82	80	155-156	133	286-289	186	638-649	239
83	81	157	134	290-293	187	650-662	240
84	82	158-159	135	294-296	188	663-676	241
85	83	160-161	136	297-300	189	677-690	242
86	84	162-163	137	301-304	190	691-704	243
87	85	164-165	138	305-308	191	705-719	244
88-89	86	166-167	139	309-312	192	720-735	245
90	87	168	140	313-316	193	736-751	246
91	88	169-170	141	317-320	194	752-768	247
92	89	171-172	142	321-324	195	769-785	248
93	90	173-174	143	325-329	196	786-804	249
94-95	91	175-176	144	330-333	197	805-823	250
96	92	177-178	145	334-338	198	824-842	251
97	93	179-180	146	339-342	199	843-863	252
98	94	181-182	147	343-347	200	864-884	253
99-100	95	183-184	148	348-352	201	885-907	254
101	96	185-187	149	353-356	202	908-930	255
102	97	188-189	150	357-361	203	931-955	256
103	98	190-191	151	362-366	204	956-981	257
104-105	99	192-193	152	367-372	205	982-1008	258
106	100	194-195	153	373-377	206	1009-1036	259
107	101	196-197	154	378-382	207	1037-1066	260
108-109	102	198-200	155	383-388	208	1067-1098	261
110	103	201-202	156	389-393	209	1099-1131	262
111	104	203-204	157	394-399	210	1132-1166	263
112-113	105	205-207	158	400-405	211	1167-1204	264
114	106	208-209	159	406-411	212	1205-1243	265
115	107	210-212	160	412-417	213	1244-1285	266
116-117	108	213-214	161	418-424	214	1286-1330	267
118	109	215-217	162	425-430	215	1331-1378	268
119	110	218-219	163	431-437	216	1379-1429	269
120-121	111	220-222	164	438-443	217	1430-1483	270
122	112	223-224	165	444-450	218	1484-1542	271
123-124	113	225-227	166	451-457	219	1543-1605	272
125	114	228-230	167	458-465	220	1606-1673	273
126-127	115	231-232	168	466-472	221	1674-1747	274
128	116	233-235	169	473-480	222	1748-1827	275
129-130	117	236-238	170	481-488	223	1828-1914	276
131	118	239-241	171	489-496	224	1915-2010	277
132-133	119	242-243	172	497-504	225	2011-2115	278
134	120	244-246	173	505-513	226	2116-2232	279
135-136	121	247-249	174	514-521	227	2233-2361	280
137	122	250-252	175	522-530	228	over 2361	298
138-139	123	253-255	176	531-540	229		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

Table III
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Plate assemblies (see dwgs 8804174 and 8804175, covering details of dwg 8804179 and 8804180).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Head of pillar extending beyond surface of plate	Visual
	102. Pillar loose or improperly assembled	Visual/Manual
	103. Regulator screw not free to turn	Visual/Manual
	104. Regulator screw longitudinally or radially loose	Visual/Manual
	105. Any operation missing or incomplete	Visual/Manual
	106. Evidence of poor workmanship (see 3.11)	Visual
	107. Objective evidence relative to material missing or improper (see 3.1)	Visual
Minor:	None defined.	

4.3.2.1.2 Gear no. 1 and pinion no. 1 assembly and gear no. 2 and pinion no. 2 assembly (see dwgs 8804214,8804215 covering details of dwgs 8804179 and 8804180).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

Major:

101.	Outside diameter of gear teeth not concentric to center line of pinion	Gage
102.	Gear not perpendicular to center line of pinion	Gage
103.	Burrs on gear teeth	Visual/Manual
104.	Tooth missing or damaged	Visual
105.	Evidence of poor workmanship (see 3.11)	Visual
106.	Objective evidence relative to material missing or improper (see 3.1)	Visual

4.3.2.1.3 Escape wheel assembly (see dwg 8804216 covering a detail of dwgs 8804179 and 8804180).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Outside diameter of escape wheel not concentric to center line of pinion	Gage
102.	Escape wheel not perpendicular to pinion center line	Gage
103.	Finish on teeth ends of escape wheel (16 microinch)	Gage/Visual Aid.
104.	Burrs on teeth	Visual
105.	Escape wheel not securely staked	Visual/Manual
106.	Tooth missing or damaged	Visual
107.	Evidence of poor workmanship (see 3.11)	Visual
108.	Objective evidence relative to material missing or improper (see 3.1)	Visual

Minor: None defined.

4.3.2.1.4 Cam assembly TA and cam assembly TB (see dwg 8804252 and 8804253, covering details of dwgs 8804179 and 8804180).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

Major:

101.	0.150-80 NS2 thread	Gage
102.	Distance from center to end of pin, max (0.250)	Gage
103.	Excessive staking compound	Visual
104.	Hardware loose or missing	Visual/Manual
105.	Evidence of poor workmanship (see 3.11)	Visual
106.	Objective evidence relative to material missing or improper (see 3.1)	Visual

Minor: None defined.

4.3.2.1.5 Center gear and arbor assembly (see dwg 8804217, covering details of dwgs 8804179 and 8804180).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Outside diameter of gear teeth not concentric to center line of arbor	Gage
102.	Gear not perpendicular to center line of arbor	Gage
103.	Burrs on teeth	Visual
104.	Gear not securely staked	Visual/Manual
105.	Tooth missing or damaged	Visual
106.	Evidence of poor workmanship (see 3.11)	Visual
107.	Objective evidence relative to material missing or improper (see 3.1)	Visual

Minor: None defined.

4.3.2.1.6 Pallet assembly (see dwg 8804225).

Categories	Characteristics	Method of Inspection

Critical: None defined.

Major:

101.	Flat on staff not parallel to vertical center line	Gage
102.	Hairspring bent	Gage
103.	Pallet bent or damaged	Visual
104.	Pallet not securely staked	Visual/Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

105. Evidence of poor workmanship (see 3.11).....Visual
106. Objective evidence relative to material missing or improper (see 3.1).....Visual

Minor: None defined.

4.3.2.1.7 TB and TA movement assemblies (see dwg 8804179 and 8804180).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Length from top of lug to bottom of plate (0.743)	Gage
	102. Outside dimension of plates, max (1.251)	Gage
	103. Any component or operation missing	Visual
	104. Evidence of poor workmanship (see 3.11)	Visual
	105. Hardware loose or missing	Visual/Manual
	106. Marking incorrect misleading or unidentifiable	Visual
	107. Objective evidence relative to material missing or improper (see 3.1)	Visual
Minor:		
	201. Serialization missing or improper (see 3.4)	Visual

4.3.2.1.8 Preparation for delivery (see 5).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Preservation, packing and packaging not in accordance with MIL-STD-1169	Visual
	102. Marking not in accordance with MIL-STD-1169	Visual
Minor:		
	201. Evidence of poor workmanship (see 3.11)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

	Test	Test Classification
a.	Initial regulation	Major
b.	Mainspring torque	Critical
c.	Torque-escapement starting and operating	Critical
d.	Gear train proof load	Critical

Of these tests, (d) is considered destructive and samples so tested shall not be returned to the lot. Destructive samples are over and above the deliverable quantity of items required by the contract.

4.3.3.1 Initial regulation, mainspring torque, torque-escapement-starting and operating. Each movement assembly shall be tested in accordance with 4.4.1, 4.4.2 and 4.4.3. If any item fails to comply with 3.5, 3.6 and 3.7, the item shall be rejected and removed from the lot.

4.3.3.2 Gear train proof load. One sample movement assembly shall be selected at random from each 25 units produced. The sample shall be tested in accordance with 4.4.4. If any item fails to comply with 3.8, the lot shall be rejected.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8828969). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

4.4.1 Initial regulation. Place fully wound movement on Gibbs Timing Table D-104 with frequency standard M348 (or substantially equal) and regulate as specified in 3.5.

4.4.2 Main spring torque. At ambient temperature, place fully wound main spring in fixture and test to conform with 3.6. (Test with "Waters" Torque Meter or with equivalent tester.)

4.4.3 Torque-escapement-starting and operating. Mount timing movement with click spring disengaged in fixture. Apply a gradually increasing torque load to output shaft in timing direction. The maximum torque required to self start the escapement shall not exceed 8 inch ounces. Repeat this procedure five times and record the results. The maximum torque required to maintain escapement operation shall not exceed 4 ounce inches. Repeat this procedure five times and record the results.

4.4.4 Gear train proof load. Mount the movement with click desengaged in a fixture which simulates the timer mounting. Restrain the pallet from oscillating. Apply 35 inch ounces torque to the output shaft in the timing direction. If no slippage, distortion or fracture occurs, the movement is acceptable. (Increase the torque until failure and record, for information purposes on sampling basis only.)

4.4.5 Environmental testing (see 3.9).

4.4.5.1 Vibration. The movement assemblies shall be installed in a fixture that simulates the actual mounting position. The assembly shall be vibrated through a frequency range of 5 to 500 Hertz (Hz) in 5 minutes cycles for a period of 10 minutes minimum in each of the three mutually perpendicular axes at an applied constant acceleration of 10 g in the 55 to 500 Hz range (see Figure 1). Upon completion of this test, the movement assemblies shall be tested as specified in 4.4.3 and 4.4.4.

4.4.5.2 Shock. The movement assemblies shall be installed in a fixture that closely simulates mounting position. The assembly shall be subjected to three impact shocks of 60 g in each direction along each of its three perpendicular axes with a minimum duration of 10 $\pm$ 1 milliseconds (see Figure 1). Upon completion of this test, the movement assemblies shall be tested as specified in 4.4.3 and 4.4.4.

4.4.5.3 Acceleration. The movement assembly shall be installed in a test fixture and subjected to a constant acceleration of 50 g for at least 10 seconds applied in both directions of the line of motion of the carrying vehicle and of 20 g for at least 10 seconds in both directions of the other two major axes (see Figure 1). Upon completion of this test, the movement assemblies shall be tested as specified in 4.4.3 and 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The movement assembly shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169.

5.1.2 Level C. The movement assembly shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169.

5.2 Packing.

5.2.1 Levels A and C. The movement assembly shall be packed in accordance with the applicable instructions contained in MIL-STD-1169.

5.3 Marking. Marking shall be in accordance with MIL-STD-1169.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-T.

6.4 Dimensions and tolerances. Dimensions and tolerances specified, represent a design objective for the manufacture of timers. It is recognized that many combinations of dimensions and tolerances will result in an acceptable timer. Therefore, compliance with specified dimensions and tolerances other than those specified in 3.10 is not mandatory.

6.5 Supersession data. This specification supersedes the requirements of Purchase Description -PA-PD-1748 (Rev. 1) dated 12 October 1962.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. NUOR-A047

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

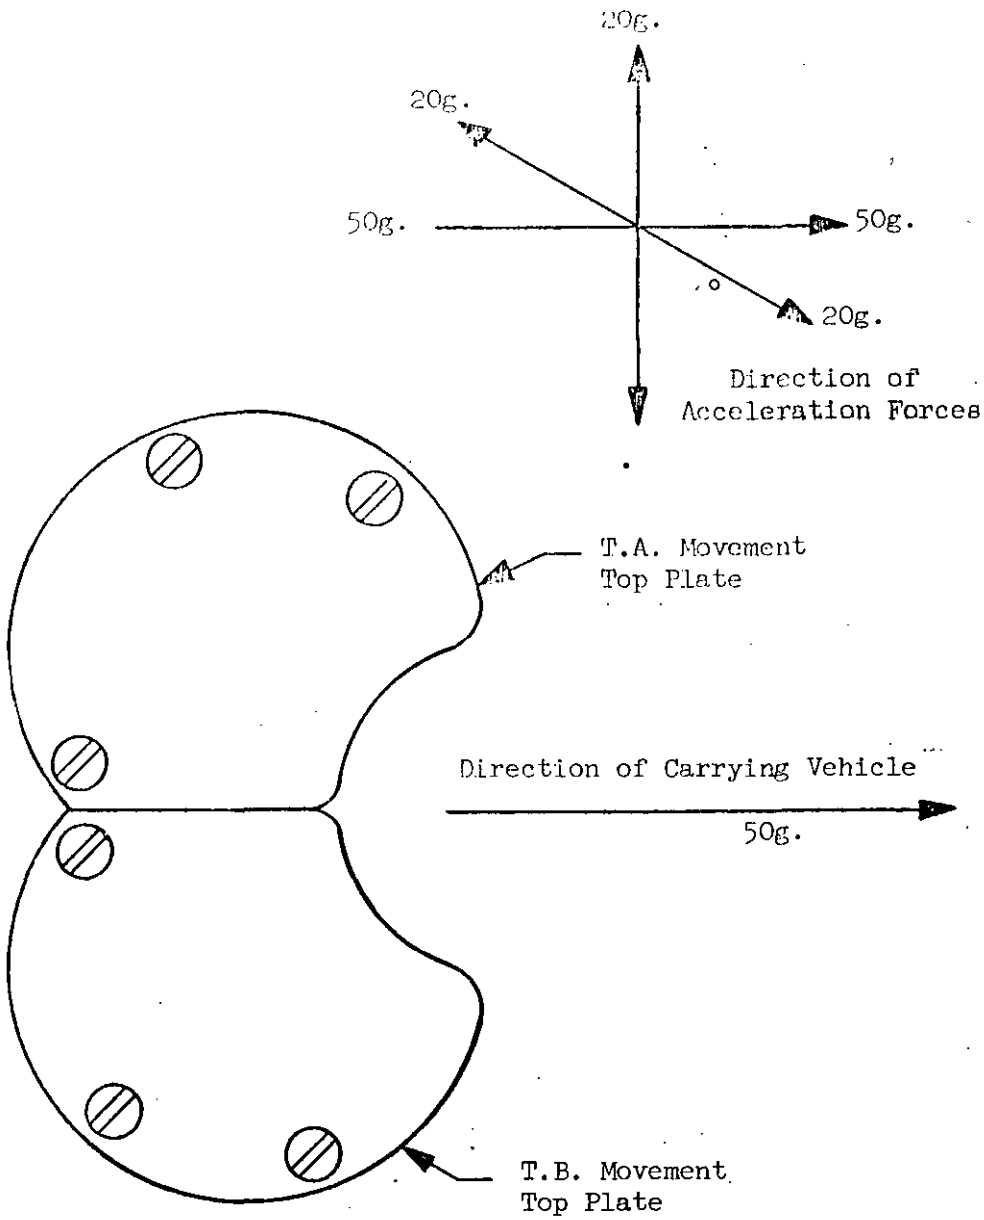


Figure 1. Movement (Clock) Assemblies

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

FOLD


POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-N-Q
Dover, New Jersey 07801

FOLD



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:03Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil - Downloaded: 2026-10-22T04:037
Check the source to verify that this is the current version before use.

668