INCH-POUND

MIL-T0-45809F(AL)
10 June 1994
SUPERSEDING
MIL-T-45809E(AL)
26 November 1985

M I L I T A R Y S P E C I F I C A T I O N

TABLE, WELDING

This specification is approved for use within the US Army Armament Research, Development and Engineering Center, Department of the Army and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 scope. This specification covers one type of welding table, with the capability of storing fire bricks and welding rods.

2. APPLICABLE DOCUMENTS

2.1 Government documetns.

* 2.1.1 Specifications ,standards, and handbooks. The following specifications, standards, and handbooks form a part of thisdocument to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department Defense Index of Specifications and Standards (DoDISS), and supplement thereto, cited in the solictation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes , mod, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	- Boxes, Shipping, Fiberboard
MMM-A-250	- Adhesive, Water-reseistant (For Closure Of Fiberboard Boxes)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research, Development and Engineering Center, ATIN: SMCAR-EST-P, Rock Island, IL 61299-7300 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3436

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116 - Preservation, Methods of
MIL-B-16008 - Brick, Insulating, High Temperature, Fire Clay.
MIL-B-16305 - Brick, Refractory, Insulating.

STANDARDS

FEDERAL

FED-STD-H28 - **Screw-Thread Standards for Federal Services.**
FED-STD-101 - **Test Procedures for Packaging Materials.**

MILITARY

MIL-STD-129 - **Marking for Shipment and Storage**
MIL-STD-130 - **Identification Marking of US Military Property.**
MIL-STD-889 - **Dissimilar Metals.**
MIL-STD-1186 - **Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods.**
MIL-STD-1190 - **Minimum Guidelines for Level C Preservation, Packing** and Marking

(Copies of specifications and standards required by contractors in connection with specific acquistion functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified the issues of the documents which are DoD adopted are those listed in the issues of the DoDISS cited in the solicitation. unless otherwise specified the issues of documents not listed in the DoDISS are the issue of the document cited in the solicitation (see 6.2).

AMERCIAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A569 - Steel, Sheet and Strip, Carbon (0.15 Maximum Percent) , Hut-Rolled, Commmercial Quality.
ASTM A575 - steel Bars, Carbon, Merchant Quality, M-Grades
ASTM D3951 - Standard Practice for Commercial Packaging.
ASTM E380 - Standard for Metric Practice.

(Application for copies should be addressed to the Amercian Society for Testing and Materials, 1916 Race Street, Philadelphia. PA 19103.)

(Nongovenment standards and other publications are normally available from the organizations which prepare or which distribution the documents. These documents also may be available in or through libraries or other informational services.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3 and 6.2.1).

3.2 Design. The table shall conform to Figures 1 through 5 and the requirements of this specification. All dimensions shall be maintained within the tolerances specified herein. The welding plate shall be free from any projection interference on the working surface. Parts subject to wear, breakage, or distortion shall he accessible for adjustment, repair, and replacement without modification, distortion, or damage to the table or any table part or component

3.2.1 Measurement system. The US Customary System of Units (US) or the International System of Units (SI) may be used in the design and construction of the welding table. In this specification, all measurements, dimensions, sizes, and capacities are given in the US system. These measurements may be converted to the SI system by using the conversion factors and methods specified in ASTM E380.

3.2.2 Threads. Threads shall conform to FED-STD-H28 and the applicable Detailed Standard section referenced therein.

3.3 Material. Materials not specifically designated herein or in the contract shall be of a quality commensurate with commercial pratice within the producing industry, shall be suitable for the intended purpose in the design of the end item, and shall meet all requirements specified herein. Materials shall be free from defects which would adversely affect the performance or maintainablility of the individual components or the overall assembly. It shall not be permissible to use reclaimed parts as is, or rebuilt from' scrap or other used equipment. When dissimilar metals are used in contact with each other, suitable protection against galvanic corrosion shall be applied in accordance with MIL-STD-889.

3.4 Construction. The welding table shall be furnished as a complete unit capable of performing the functions specified herein. All of the bolts, nuts, washers and other fasteners required to assemble the table shall be furnished with each table.

3.4.1 Welding, brazing, and soldering Welding, brazing, and soldering shall be of a quality which shall sustain all requirements of the welded, brazed, or soldered parts. These operations shall not be employed as repair measures for defective parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

3.4.2 Fastening devices. Screws, pins, bolts, and similar parts shall be installed with means for adjustment and for preventing loss of tightness l The methods for adjustment and for preventing loss of tightness shall be in accordance with accepted engineering standards and practice. All such parts when subject to removal or adjustment shall not be swaged, peened, staked, or otherwise deformed. All kited connections shall be secured with either lock nuts or lock washers. The length of the fasteners shall be the minimum required.

3.4.3 Interchangeabililty. All parts shall be manufactured to definite standards, clearances, and tolerances in under that any such parts of a particular type or model may be replaced, interchanged and adjusted without modification of the replacement parts or any other parts of the unit. When practical, all parts shall be permanently and legibly marked in accordance with MIL-STD-130.

3.4.4 Surfaces. Surfaces of castings forgings, molded parts, stampings and welded parts shall be clean and free of sand, dirt, fins, sprues, scale, flux, and other extraneous materials, as consistent with accepted industry standards. External surfaces shall be smooth and edges shall be rounded or beveled.

3.4.5 Tolerances. Unless otherise specified herein, the tolerance on all dimensions shall be ± 1/4 inch except for hole sizes which shall be ± 1/32 inch.

3.5 Vibration. The complete welding table, loaded with fire brick or equivalent weight (48 pounds) and welding reds or equivalent weight (60 pounds) in their respective racks, and rigidly fastened through its mounting holes onto a vibrating machine shall withstand vibrations with an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency of 600 cycles per minute (cpm) for a period of one hour in the direction of the vertical axis. The table shall show no permanent deformation, cracks in welds, or distortion of any component

3.6 Detail of components. The table shall consist of the principal component parts specified in 3.6.1 through 3.6.5.

3.6.1 Legs. The table shall incorporate four legs fabricated of 1/8 inch by 2 inch by 2 inch angle iron conforming to ASTM A568. Each leg shall be provided with an integral bottom plate located within the leg angle and furnished with a 13/32 inch hole for mounting the table to the floor (see Figure 3). Two 11/32 inch holes shall be provided in each leg, me hole near the leg top for bolting to the table top and the other hole in the lower section for bolting to the leg brace (see Figure 3). One pair of legs shall be welded to the welding rod rack assembly (a 3.6.2), and one pair of legs shall be welded to the fire brick rack assembly (see 3.6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

3.6.1.1 Leg brace. Two leg braces shall be provided with each table. The leg braces shall be fabricated of 1/8 by 1-1/2 inch steel conforming to ASTM A575 . Each leg brace shall include two 11/32 inch holes, one hole for each leg (see Figure 3).

3.6.2 Welding rod rack. The welding rod rack shall be fabricated (see Figure 4) of Manufacturers' Standard Gage No. 16 (0.06 inch) steel conforming to ASTM A575. The rack shall provide six separate storage compartment for welding rods. Each compartment shall be of welded construction and shall be capable of withstanding without damage, an individual load of not less than ten pounds of welding rods with a total load of 60 pounds for the rack.

3.6.3 Fire brick rack. The fire brick rack shall be fabricated (see **Figure 5) of steel conforming to ASTM A569 or A575. The rack shall provide six separate storage compartments for fire bricks. Each compartment shall be of welded construction and shall be capable of withstanding, without damage, an individual load of not less than one fire brick (approximately eight pounds) with a total load of 48 pounds for the rack.**

3.6.4 Fire brick. Six fire bricks, 2-1/2 by 4-1/2 by 9 inches, conformly to MIL-B-16008 or class B of MIL-B-16305 shall be provided with each welding table.

3.6.5 Table top The table top shall be fabricatedf of 3/16 by 23-1/4 by 36-5/8 inch steel plate or sheet conforming to ASTM A575. The top shall be supported by 1-1/4 by 1-1/4 angle iron conforming to ASTM A569. The angle frame shall be welded to the underside of the top plate or sheet for alignment with the front and side edges of the top. Four 11/32 inch holes shall be provied in the angle frame for bolting the top to the leg assemblies (see Figure 1).

3.7 Assembly instructions. The manufacturer shall furnish two copies of assembly instructions with each table. The instructions shall describe in a clear and accurate manner the procedure to follow in the assembly and disassembly of the table. When practicable, all components shall be legibly marked by stenciling or other means on the back surface with the manufacturer's part number for identification during assembly. The instuctions shall be sealed in a waterproof envelope and securely fastened to a component of the table.

3.8 Painting Unless otherwise specified (see 6.2.1), painting and finishing shall be in acoordance with the best commercial practice in the industry. Before painting, all surfaces shall be clean and be free of all foreign matter detrimental to painting At least one coat of prime (or a phosphate or chromate base) and one coat of enamel, or equivalent (i.e., epoxy enamel), shall be applied.

3.9 Product identification. The welding table shall be marked for product identification in accordance with MIL-STD-130 and, unless otherwise specified (see 6.2.1), shall include the National Stock Number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. Standards of workmanship shall assure that the welding table shall have the stability. strength, durability, safety, and efficient operating characteristics found in the best commercial units and as specified in Section 3.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall be applied to a preproduction model or initial production item (see 3.1). Unless otherwise specified (see 6.2.1), first article inspection shall consist of the examination in 4.5 and all tests under 4.6. Failure of the first article to pass the examination or any of the tests shall be cause for rejection.

* 4.4 Quality conformance inspection. Quality conformance inspection shall be applied to production units being offered for acceptance under the contract. The inspection shall consist of (a), (b) and (c) below. Unless otherwise specified (see 6.2.1), each Table shall be subjected to the examinations and test in 4.5 through 4.7. Failure of any Table to pass these inspections or tests shall be cause for rejection.

(a) Product examination (see 4.5).
1/(b) Packaging validation test (see 4.6.2).
(c) Packaging inspection (see 4.7).

Source: https://assist.dla.mil -- Downloaded: 202640-22T03:56Z
Check the source to verify that this is the current version before use.

* **4.4.1 Sampling. Sampling for quality conformance inspection shall be performed as listed with all samples selected randomly.**

Inspection or Test	Lot or Batch Size	Sample Size
Product examination (see 4.5)	1 - 90	13
Packaging validation test (see 4.6.2)	2/	-
Packaging inspection (see 4.7)	1 - 90	5

The lots shall not exceed the maximum sizes indicated above. If lot size is less than or equal to sample size, 100% inspection is required. Each lot shall be accepted with no defects and rejected if one or more defects are found.

* 4.5 Product examination . Visually and dimensionally examine each welding table to determine conformance with the requirements of 3.2 through 3.4.5 and 3.6 through 3.10. visual examination shall include verification of completeness of manufacture and assembly. conformance to specified standards adequacy of markings proper cleaning, and freedon from the identified defects. Dimensional examination includes measuring dimensions as specified Failure of the contractor to provide objective evidence that the welding table and its component have passed the examinations prescribed for them by the contractor's inspection system shall be cause far rejection. In addition, failure of the contractor to provide objective evidence that all parts are manufactured to definite standards, clearances, and tolerances so that no replacement part will degrade the form, fit, or function of the end item (see 3.4.3), shall be cause for rejection.

NOTES:

1/ Perform the packaging validation test(s) on one unit only when a First Article Test has not been conducted.

2/ Perform the packaging validation test(s) on one Unit from the first production lot only when a First Article Test is not specified

4.6 Test.

4.6.1 Vibration test. Load the complete welding table with fire brick or equivalent weight (48 pounds) welding rods or equivalent weight (60 pounds) in their respective racks. The welding table, with these loads, shall be rigidly fastened through the mounting holes in the bottom of the legs to a vibrating machine and subjected to vibrations with an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency of 600 cpm for a period of me hour in the direction of the vertical axis. The table shall show no permanent defamation, Cracks in welds, or distortion of any component .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

* 4.6.2 Packaging validation tests. After the Quality Assurance inspection and tests have been sucessfully completes, one Table, packaged in accordance with the requirements of Section 5 Packaging, shall be selected at random and subjected to the following rough handling tests specified in FED-STD-101. A dummy load shall not be used. All tests are to be conducted under ambient conditions. After the test has been completed, the container shall be inspected. Defects in accordance with those described below shall be cause for rejection. The unit shall then be unpacked and again subjected to the Quality Assurance inspection and tests to reaffirm that the Table meets the requirements. After all requirements have been met, the unit shall be inspected and repackaged (see 4.7) before submission for government acceptance. After testing, any damage to the packaging shall be replaced prior to acceptance of the lot.

* 4.6.2.1 Mechanical handling test. Test shall be conducted using Method 5011.1 Paragraph 6,2 (Lifting and transportation by forklift truck) of FED-STD-1Q1. Criteria for passing/failing of the test is stated in Paragraph 7.1.5 of Method 5011.1.

4.7 Packaging inspection. Packaging inspection shall be conducted before and after packaging to determine compliance with the requirements of Section 5.

5. PACKAGING

* 5.1 Preservation. Preservation sahll be level A, C or commercial as specified (see 6.2).

* 5.1.1. Level A.

* 5.1.1.1. First article. When first article packaging inspection is specified, the supplier shall furnish one complete unit for examination. The first article may be either a preproduction unit or an initial production unit which conforms to the requirements stated herein. In either casef the approved first article and the production units shall be identical and in accordance with the terms of the contract, Approval of the first article shall not relieve the supplier of the responsibility to furnish equipment and packaging in accordance with the stated requirements.

* 5.1.1.2. Disassembly. When practical, items shall be disassembled to afford protection of components, attachments, and accessories against damage, pilferage and to reduce cubage. Disassmbled parts shall be clearly and legibly marked as to identity and proper location on the assembled item and matchmarked when necessary to facilitate reasembly. Removed parts and mating parts on the item shall be matchmarked by stenciling on the part or by the use Of tags. Tags shall be waterproof and ink used shall be waterproof. Tags shall be firmly secured to each individual part. All fasteners removed during disassembly shall be installed in one of the mating parts. A part shall not be dissassembled unless it can be readily assembled in the field without special skills or tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

* 5.1.1.3. General requirements. Through cleaning and drying of all bare surfaces is essential before the application of a preservative. Cleaning, drying and application of preservatives shall progress in an uninterrupted series of operations. When periods of interruption ae necessary, temporary protraction shall be provided to partially processed items, as required, to insure against contamination The materials used in cleaning, drying and preseration shall not be injurious to the shelving, worktable and accessories.

*** 5.1.1.4. Cleaning and drying. Component parts, disassembled parts, attachments, accessories, assembly hardware and small miscellaneous parts** shall be cleaned, dried, preserved, packaged and packed like the basic unit and as specified herein. Cleaning shall be in accordance with method c-1 of MIL-P-116 except that no ClaSS 1 ozone depleting substances such as 101.1 trichoroethane, chlorofluorocarbons halons or carbon tetrachlorocarbon shall be used. Drying shall be accomplished by any applicable means stated in MIL-P-116 .

* 5.1.1.5. Preservation. Immediately after cleaning and drying, surfaces that are subject to corrosion or deterioration shall be treated with a petroleum (P-type) preservative. Preservation shall be in accordance with any applicable method of MIL-P-116 except that preservatives P-6 is not authorized for use. Excessive use of preservative compounds shall be avoided. Petroleum (P-type) preservative compounds shall nut be applied to non-metallicitems, corrosion resistant metal, or metal that is treated or painted to resist corrosion.

* 5.1.1.6. Technical data . Technical data furnished shall be placed in a waterproof, greaseproof bag, sealed and and attached to the table or placed in the box containing the table.

* 5.1.1.8. Fire bricks. The fire bricks shall be packed in their own separate container. The number of bricks in each container shall be commensurate with industry standards. The container shall conform to PPP-B-636 and be sized to minimize the movement of the bricks. These containers shall then be placed in the shipping container with the table.

* 5.1.2. Level c. Worktables and shelving shall be preserved in accordance with MIL-STD-1190.

*** 5.1.2.1. Commercial. Commercial packaging shall be in accordance with the requirements as specified in ASTM-D-3951.**

* 5.2. Packing. Packing shall be Level A, B, C, or Commercial as specified (see 6.2.1).

* 5.2.1. Level A. Before being packaged in the shipping container Cushioning shall be applied to prevent marring, puncturing, damage or any abrasive action to the finished surfaces or protruding parts, All cushioning

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

material shall be secured by taping or tying to prevent any possibility of shifting or becoming detached during transit and storage. Cushioning material shall beat least 3/4 inch thick, fabricated in the form of pads or blankets, and made of fiberboard Disassembled parts, accessories and attachments, shall be consolidated, cushioned to prevent damage and packed in fiberboard boxes conforming to PPP-B-636 class WWVR. Federal Specification identified as MMM-A-250 in Federal Specification PPP-B-6326 is nut authorized for use in the packaging process l The boxes shall be sized to fit the parts being packed. Size and weight limitations of the container specifications shall apply.

* 5.2.2. Shipping container The unit and its associated items shall be packed in a shipping container conforming to PPP-B-601 or PPP-E-621, Overseas type. Selection shall be governed by the size and weight limitations of the container specification. The shipping container shall be provided with forklight capabilities. Each shipping container shall contain only one unit and all associated items.

* 5.2.3: Level B. Unless otherwise specified, Level B requirements will be the same as Level A, except the shipping container shall be of the domestic type.

* 5.2.4. Level c. Worktables and selving shall be packed in accordance with the requirements of MIL-STD-1190.

* 5.2.5. Commercial. Commercial packing shall be in accordance with the requirements as specified ASTM-D-3951.

* 5.3. Marking. Marking shall be in accordance with MIL-STD-129. Special markings shall be as required by contract or purchase order.

* 5.4. Contents . For the intermediat and shipping containers the arrangement of contents , cushioning, anchoring, blocking and bracing shall be in accordance with MIL-STD-1186 except “delete MIL-P-19644' in paragraph 5.3.3.

* 5.5. Rough handling The shipping container and all contents shall be capable of withstand the shipping and handling conditions expected from fork lift handing and truck transport. The container, its contents and the packaging shall not be damaged, fuctionally or physically, or items displaced by the appropriate rough handling test(s) specified eleswhere in the contract.

5.6. Workmanship. The quality of work shall be such that when proper procedure is followed, materials and equipment being processed will be provided the maximum protection against corrosion and deteroration consistent with the shipment hazards known or anticipate, and suitable for long term storage .

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The welding table covered by this specification is intended to be used in mobile shop vans as working surface upon which to weld.

6.2 Ordering data.

* 6.2.1 Acquistion requirements. Acquistion doucments should specify the following:

(a) Title, number, and date of this specification.
(b) First article when rquired (see 3.1).
(c) Painting and finishing if different (see 3.8).
(d) Product identification if different (see 3.9).
(e) First article inspection if different (see 4.3).
(f) Quality conformanceinspection if different (see 4.4).
(9) Sampling if different (see 4.4.1).
(b) Level of preservation, packing, and marking if different (see 5.2, 5.3, and 5.4).

6.3 Contract data requirements. Required technical data such as operator's manuals, parts lists, and other instructions for operation and maintenance, as identified on a numbered DD Form 1664, should be specified on a DD Form 1423 incorporated in the contract.

6.4 Subject term (Key work) listing.

Fire brick
Table
welding

6.5 Changes from previous issue. The margins of this specification are marked with an asterick to indicate where changes (additions, modifications, corrections, deletions) for the previous issue were made. This was done as a convenience only and the Government assures no liability whatsoever for any inaccuracies in these notations. Ridders and retractors are cautioned to evalute the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - AL

Preparing activity:
Army - AL

Project NO. 3436-A050

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

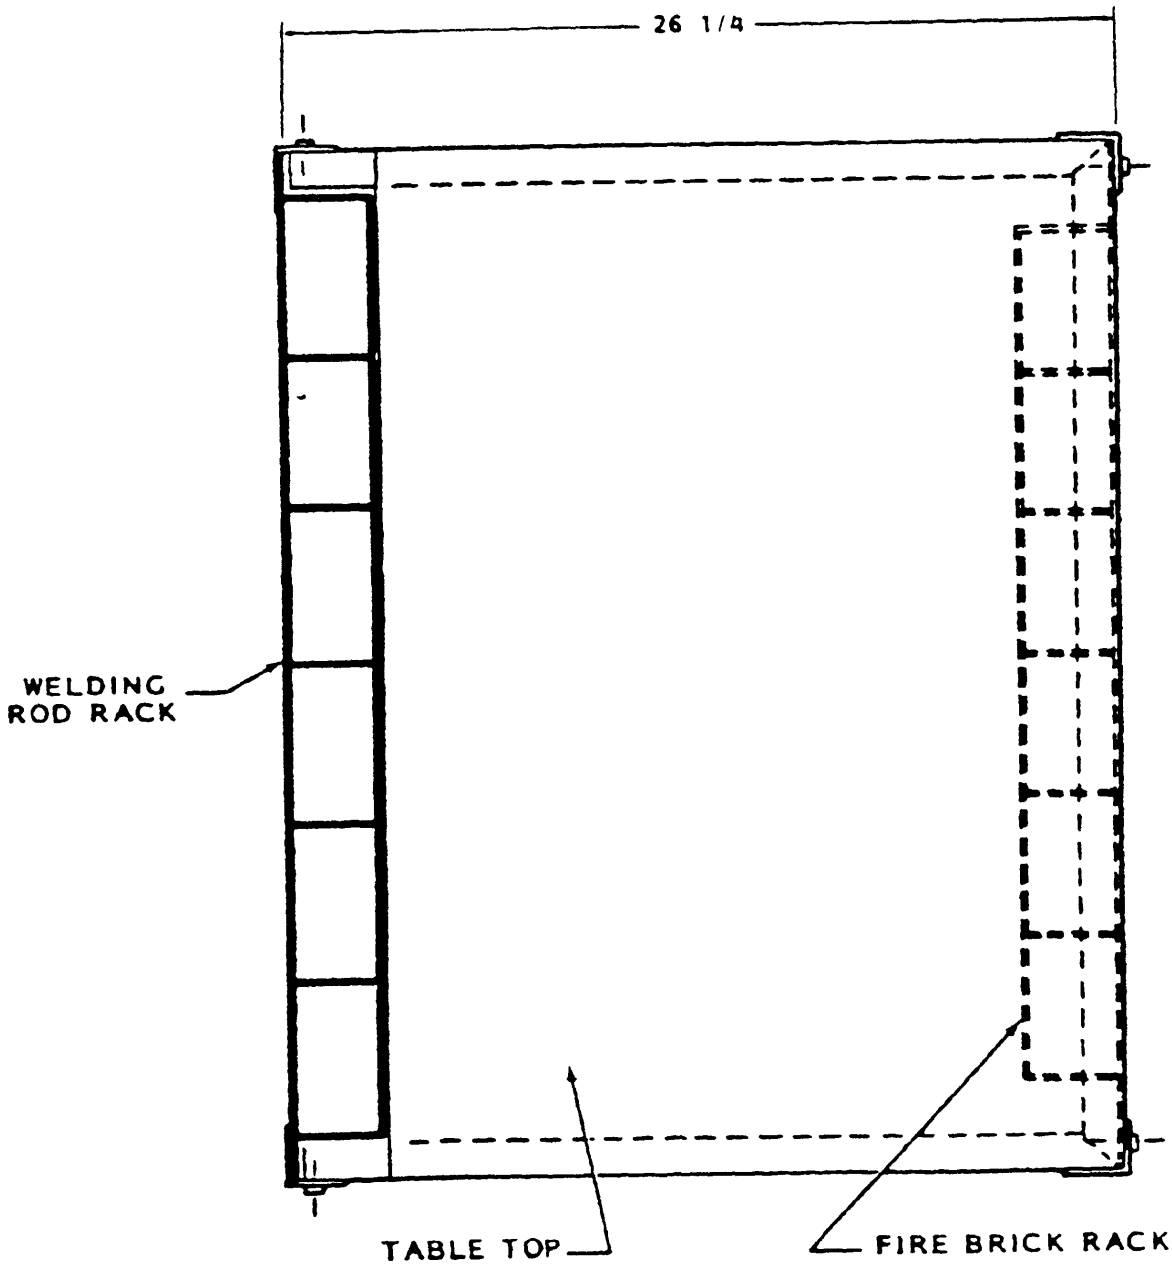


FIGURE 1. Top view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

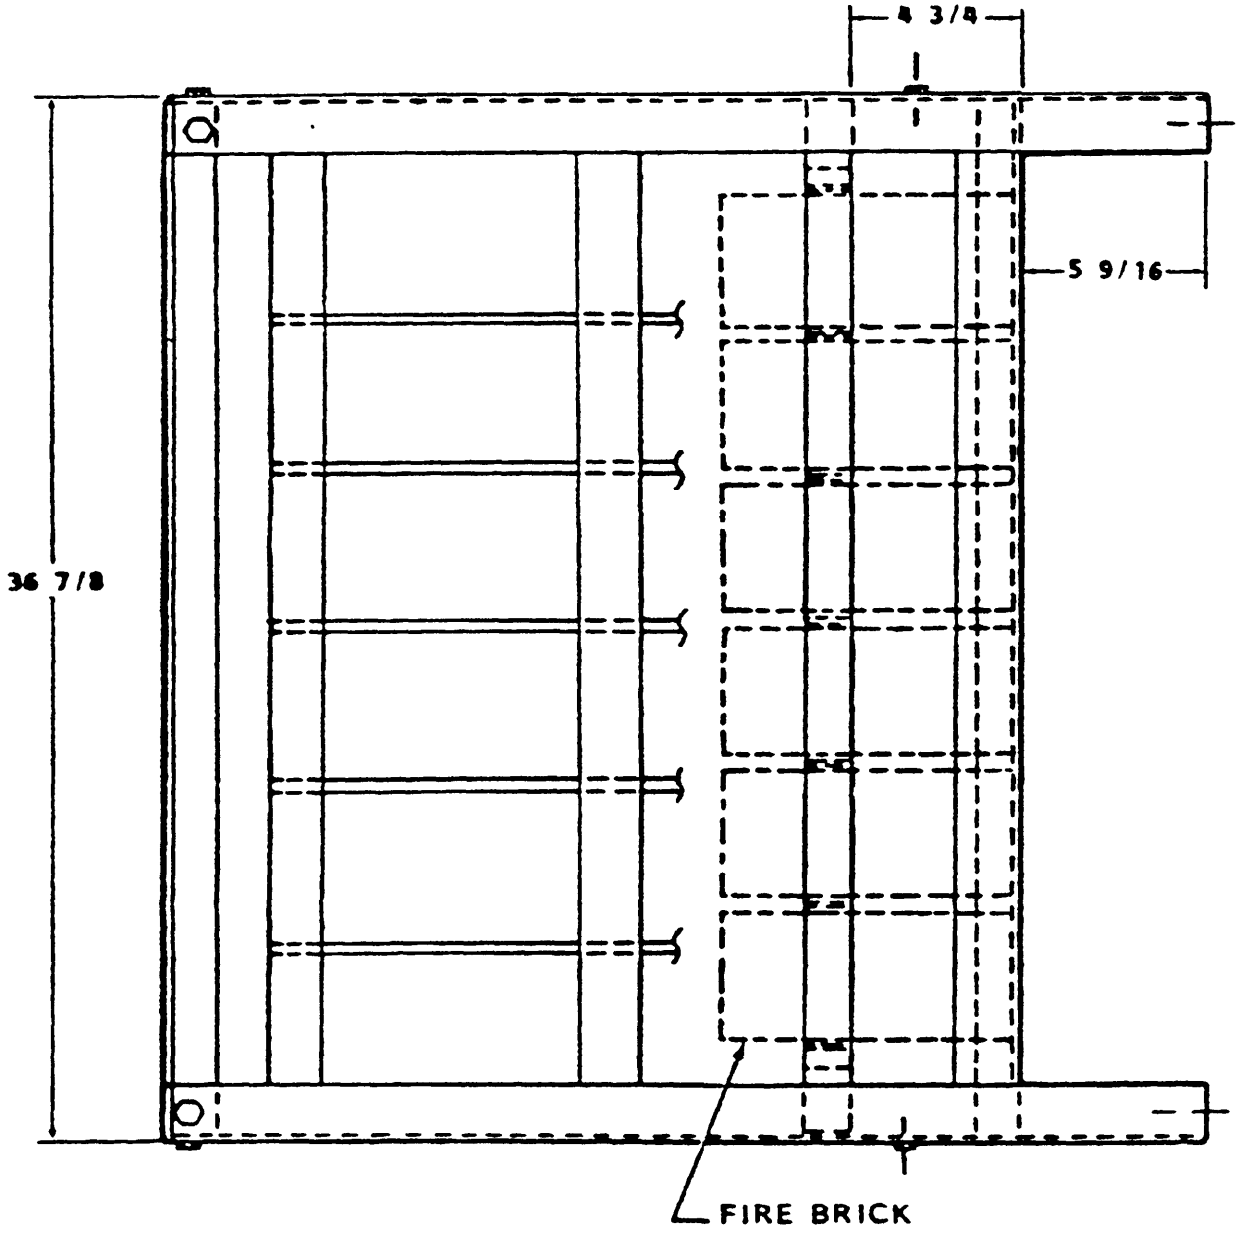


FIGURE 2. Side view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

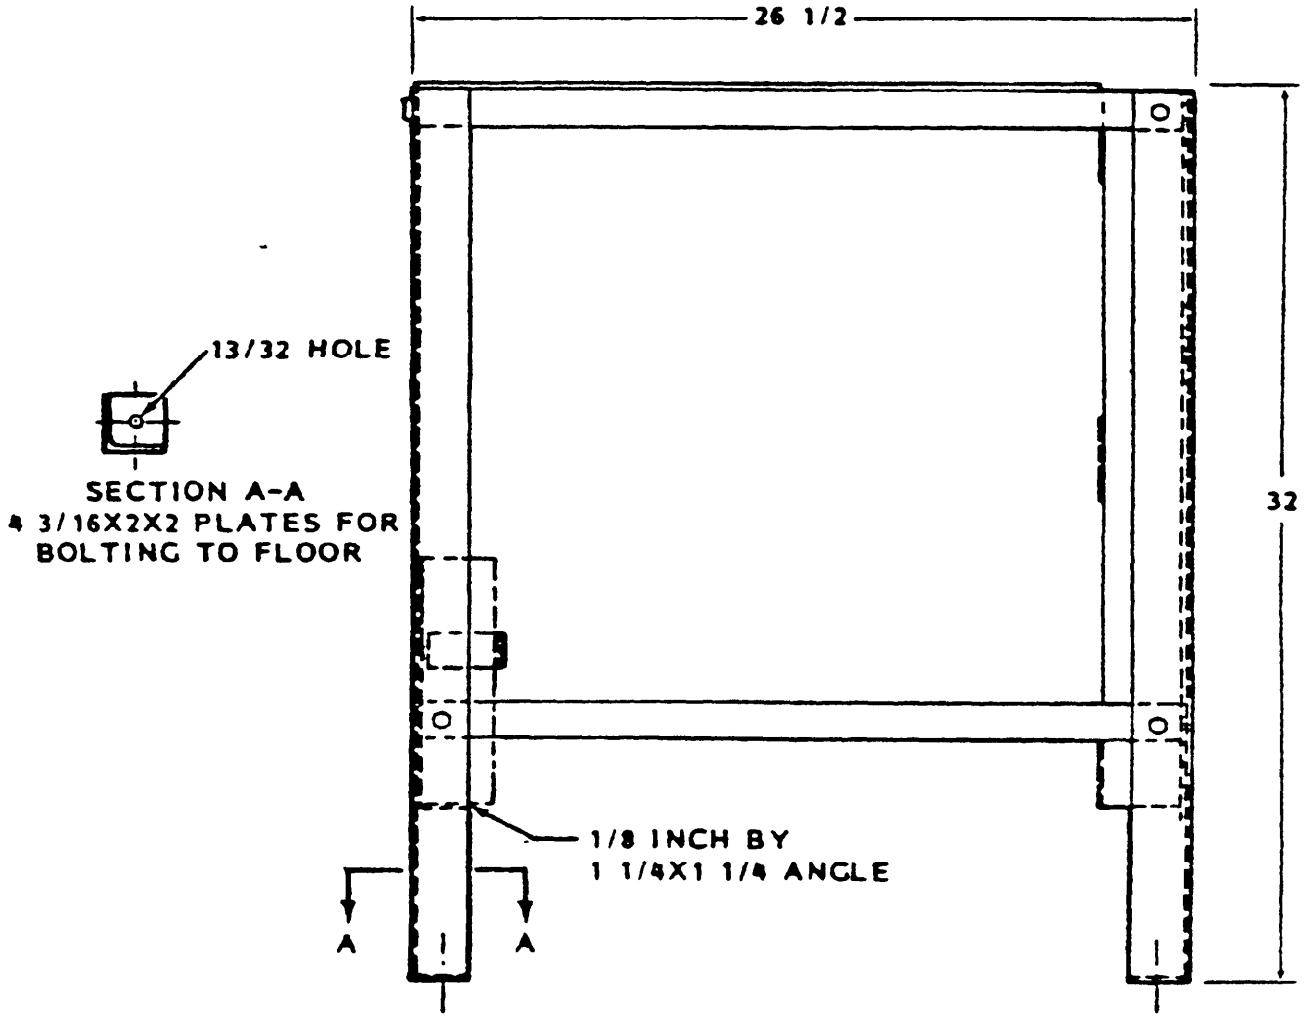


FIGURE 3. End view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

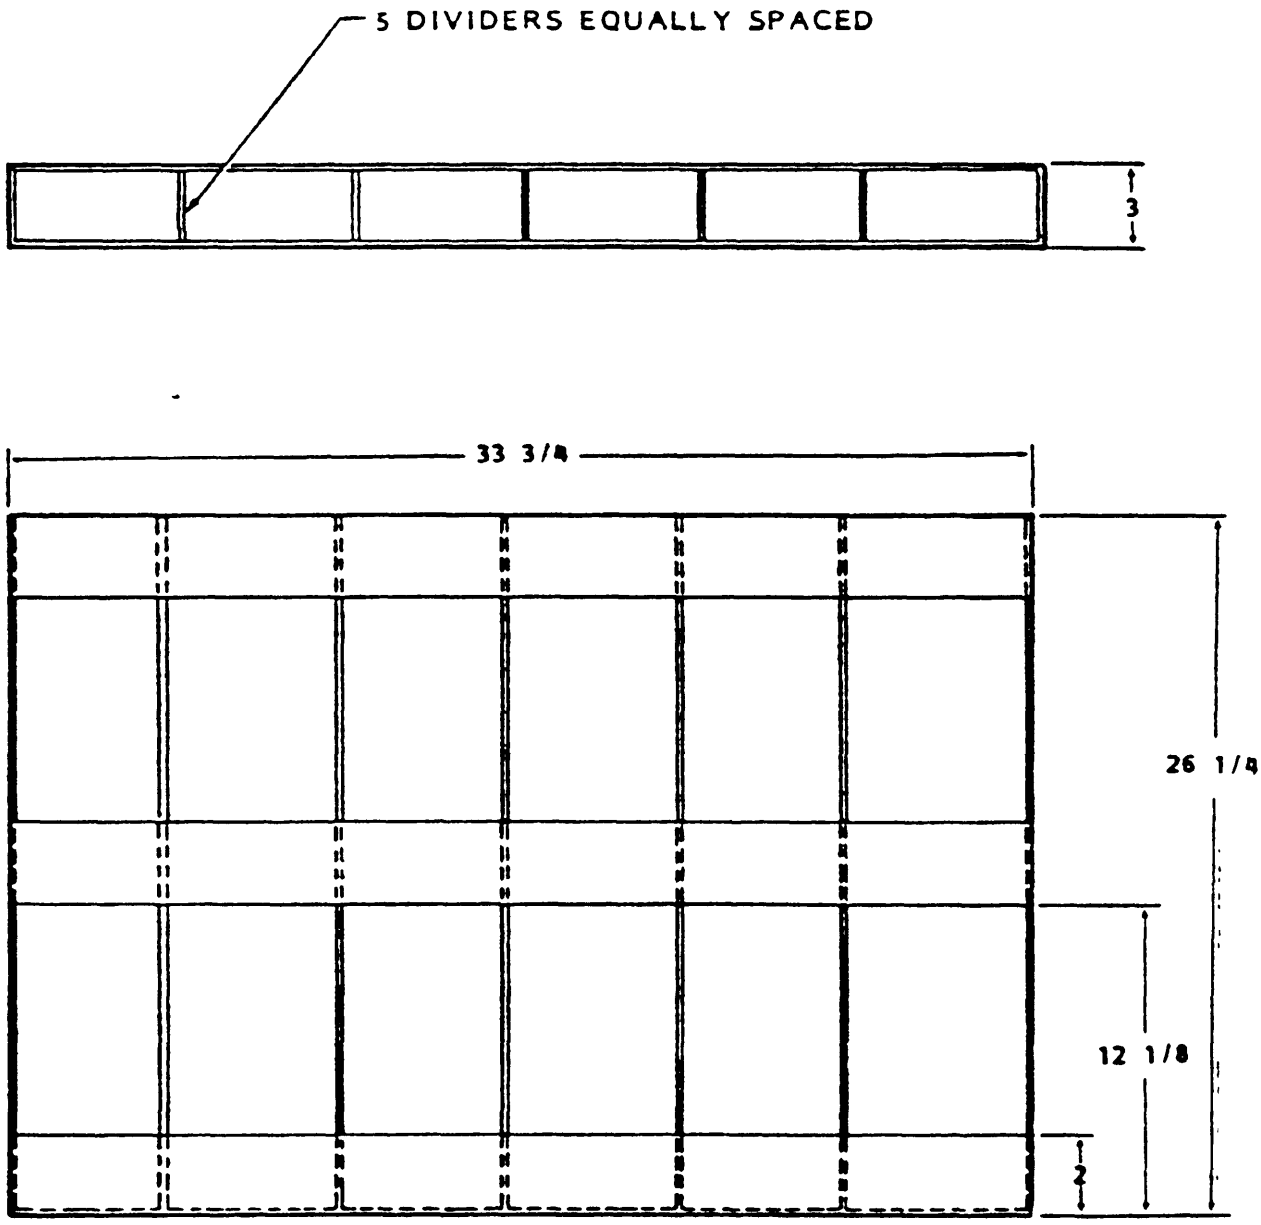


FIGURE 4. Welding rod rack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

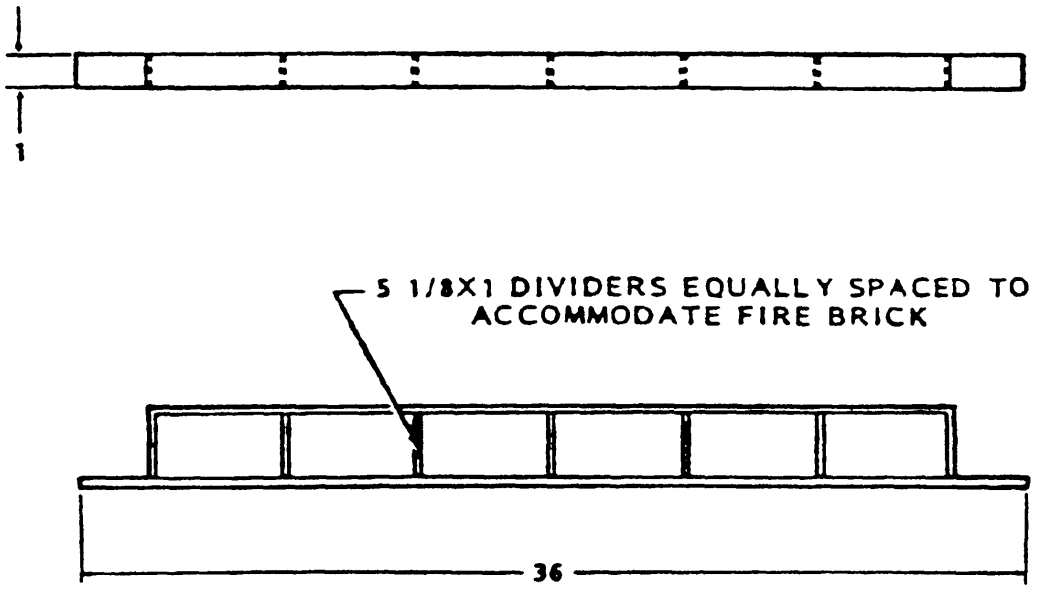


FIGURE 5. Fire brick rack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)

3. DOCUMENT TITLE

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
Cmdr, USA Armament Res, Dev & Engr Ctr		
c. ADDRESS (Include Zip Code) ATTN: SMCAR-EST-S Rock Island, IL 61299-7300	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) DSN
Cmdr USA Armament Res, Dev. & Engr Ctr	(319) 782-8230	793-8230
c. ADDRESS (Include Zip Code) ATTN: SMCAR-EST-S Rock Island, IL 61299-7300	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete. — 198/298

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:56Z
Check the source to verify that this is the current version before use.