SS-R-620B
May 11, 1970
SUPERSEDING
Fed.Spec. SS-R-620A
July 24, 1962

FEDERAL SPECIFICATION

ROOFING FELT, GLASS FIBER, ASPHALT COATED (FOR FLASHING AND ROOFING)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a glass fiber, asphalt-coated mat intended as a membrane for flashing and built-up roofing.

1.2 Classification. The fibrous-glass asphalt-coated roofing felts shall be of the following types, as specified (see 6.2):

Type I - 8 lb. felt.
Type II - 14 lb. felt.
Type III - 10 lb. felt.
Type IV - 14 lb. felt (with Kraft paper laminated on bottom).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids, or request for proposal, form a part of the specification to the extent specified herein.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

FSC 5650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:13Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-R-3423 - Roofing Felt: In Rolls, Packaging of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standard:

D 46 - Testing of Bituminous Saturated Felts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:13Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

Underwriters' Laboratories, Inc. (UL):

Building Materials List.
55a Roof-Coverings, Built-Up, Materials for Use in Construction of.

(Application for copies should be addressed to the Underwriters' Laboratories, Inc., 207 E. Ohio St., Chicago, Illinois 60611).

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Attn: Tariff Order Sec., 1616 P St, N.W., Washington, D.C. 20402.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill. 60606.)

(Technical Society and technical association specification and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Material. Material for all types roofing felt shall be essentially glass fiber mat, uniformly coated with asphalt. The use of sand or mica schist to prevent sticking in the rolls will be permitted on types I, II, and III felts. Type IV felt shall have kraft paper laminated to the bottom surface.

3.1.1 Fiber glass mat. The mat shall consist of a thin porous sheet of uniformly distributed glass fibers of the monofilament type. The mat shall be with or without reinforced strands of continuous glass yarns and shall be bonded with a suitable thermosetting resin and water-resistant binder.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:13Z
Check the source to verify that this is the currentversion before use.

3.2 Physical properties. Physical properties of the fabricated felt shall conform to the requirements of table I when tested as specified in 4.5.

TABLE I. Physical properties

Requirements	Type I	Type II	Type III	Type IV
Area per roll, sq.ft., min.	540	432	540	432
Net weight, roll, pounds, min.	34	55	44	53
Width, inches, min.	35-3/4	35-3/4	35-3/4	35-3/4
Coated felt				
Weight/100 sq.ft., lbs., min.	6.2	12.8	8.1	12.3
Pliability at 25° C., min. (radius in inches)	1/2	1/2	1/2	1/2
Volatile matter at 105 - 110° C. % by weight, max.	1.0	1.0	1.0	1.0
Breaking strength, average min., lbs.	17	17	25	37
Uncoated felt				
Weight/100 sq. ft., lbs., min.	1.0	1.0	1.8	1.0
Ash, % by wt., min.	77	77	70	70

3.3 Stickiness and pliability. The felt shall neither crack nor be so sticky as to cause tearing or material damage when it is unrolled in temperatures between 50° F. (10° C.) and 140° F. (60° C.).

3.4 Marking for identification. Roofing felts covered by this specification shall be marked in accordance with MIL-STD-130.

3.5 Workmanship. Asphalt-coated glass-fiber felts shall be uniform throughout, and shall be free from visible defects such as holes larger than 1/16 inch in diameter, ragged or untrue edges, breaks, rents, cracks, or indentations. The surface of the glass-fiber felts shall be uniformly smooth and free from patches of unabsorbed saturant and dry spots.

3.6 Fire and casualty hazards.

3.6.1 Each contractor shall submit to the contracting agency proof that the roofing felt he proposes to supply under this specification conforms to the applicable requirements of UL 55a and the current Building Materials List. The label, or listing with re-examination, of the Underwriters' Laboratories, Inc. may be accepted as evidence that the roofing felt conforms to this requirement.

Source: https://assist.dla.mil -- Downloaded: 20260-26T12:13Z
Check the source to verify that this is the current version before use.

3.6.2 In lieu of the label, or listing with re-examination, the contractor may submit independent proof, satisfactory to the contracting agency, that the roofing felt conforms to the applicable requirements of the published standards including methods of tests of UL 55a and the current Building Materials List.

3.6.3 Compliance with the Underwriters' Laboratories, Inc., requirements regarding fire and casualty hazards does not absolve the contractor from complete compliance with the requirements of this specification in order to secure the acceptance of his material. In event of difference between any of the requirements of this specification and those of Underwriters' Laboratories, Inc., the requirements of this specification shall govern.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirement.

4.2 Inspection lot. Unless otherwise specified (see 6.2), a lot shall consist of all roofing felts, of the same type, offered for delivery at one time.

4.3 Sampling.

4.3.1 Sample unit. The sample unit shall be one completely fabricated felt roll.

4.3.2 Visual and dimensional examination. A random sample of roofing felt rolls shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level S-4. The acceptable quality levels shall be based on 4.0 percent defective for major defects and 6.5 percent defective for minor defects.

4.3.3 Tests. A random sample of roofing felt rolls shall be selected from each lot offered to the Government in accordance with MIL-STD-105 at inspection level S-2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:13Z
Check the source to verify that this is the current version before use.

4.4 Examination. Roofing felt selected in accordance with 4.3.2 shall be examined and measured to determine the existence of the defects listed in table II.

TABLE II. Classification of defects

Category	Defects	Requirement paragraph
Major:		
101	Type felt not as specified.	1.2
102	Coating not uniformly applied.	3.1 & 3.5
103	Width not within tolerance.	3.2
104	Rolls stick or tear while unrolling.	3.3
105	Holes or cracks present.	3.5
106	Edges ragged.	3.5
107	Poor workmanship.	3.5
Minor:		
201	Rolls not properly marked	3.4

4.5 Tests. Sample roofing felt rolls, selected in accordance with 4.3.3 shall be subjected to the test specified in ASTM D146 to determine if the requirements of table I have been met. Failure of any sample to meet the requirements of table I shall be cause for rejecting the lot.

4.6 Inspection of preparation for delivery. The packaging, packing and marking of the roofing felt shall be inspected to determine conformance with the applicable requirements of section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. The roofing felt shall be packaged in accordance with the applicable level A requirements of MIL-R-3423.

5.1.2 Level C. The roofing felt shall be packaged in accordance with the supplier's standard practice.

5.2 Packing. Packing shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:13Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. The roofing felt shall be packed in accordance with the applicable level A requirements of MIL-R-3423.

5.2.2 Level C. The roofing felt shall be packed in a manner that will insure arrival at destination in satisfactory condition and be acceptable at lowest rates to the carrier. Containers and packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract or order, packages and packs shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129, as applicable (see 6.2).

6. NOTES

6.1 Intended use.

6.1.1 Type I. Type I felts are intended as ply sheets in built-up roofing and flashing assemblies.

6.1.2 Type II. Type II felts are intended as a base sheet on non-nailable decks.

6.1.3 Type III. Type III felts are intended as ply sheets in built-up roofing flashing assemblies and as base sheets on non-nailable decks.

6.1.4 Type IV. Type IV felts are intended as the base sheets on nailable decks and as combination dry sheet and base sheet on nailable type decks.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.

b. Type of felt required (see 1.2).

c. If inspection lot is different (see 4.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:13Z
Check the source to verify that this is the current version before use.

d. Level of packaging and level of packing required (see 5.1 and 5.2).

e. Marking required (see 5.3).

MILITARY INTEREST:

Custodians

Army - ME
Navy - YD
Air Force - 84

User activities

Army - CE

Preparing activity:

Navy - YD

CIVIL AGENCY INTEREST:

GSA-FSS

☆U.S. GOVERNMENT PRINTING OFFICE: 1970- 433-694/4010

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain copies and other documents referenced herein. Price 10 cents each.


Source: https://assist.dla.mil -- Downloaded: 202640-26T12:13Z
Check the source to verify that this is the currentversion before use.

FOLD

DEPARTMENT OF THE NAVY

U.S. Naval Construction Battalion
Center
Davisville, Rhode Island 02854

OFFICIAL BUSINESS

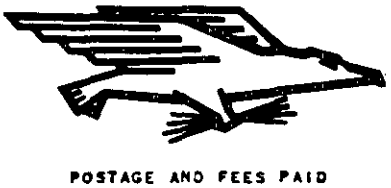

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Commanding Officer
U.S. Naval Construction Battalion Center
Code 310
Davisville, Rhode Island 02854

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:13Z
Check the source to verify that this is the currentversion before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
SS-R-620B; Roofing Felt, Glass Fiber, Asphalt Coated (For Flashing and Roofing)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:13Z
Check the source to verify that this is the current version before use.