INCH-POUND

QQ-B-575C
AMENDMENT 1
1 April 1997

FEDERAL SPECIFICATION

BRAID, WIRE (COPPER, TIN COATED, OR SILVER COATED, TUBULAR OR FLAT)

This amendment forms a part of QQ-B-575C, dated 22 September 1993, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

1.2.1 Delete and substitute

1.2.1 Federal Part or Identifying Number (PIN). PINs shall be in the following form:

* I

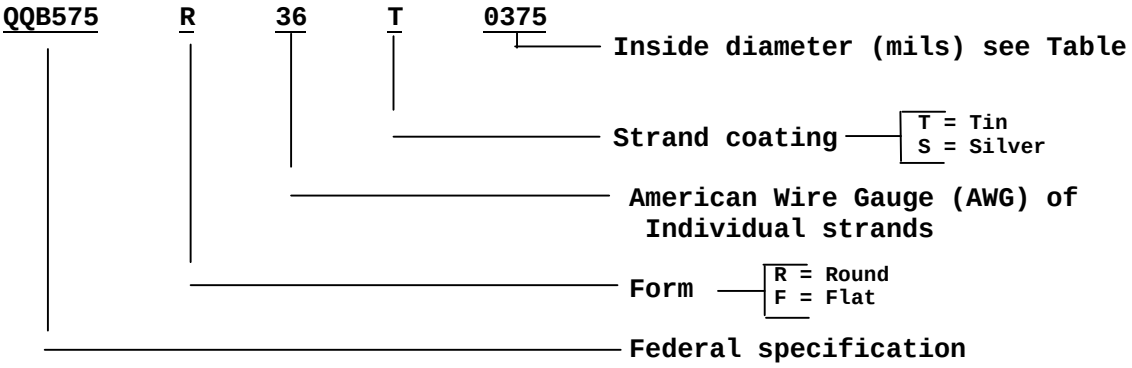

PAGE 2

2.1 Under MILITARY STANDARDS delete:

MIL-STD-105 – Sampling Procedures and Tables for Inspection by Attributes.

2.2 Delete and substitute:

Address for American National Standards Institute (ANSI)

American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

Address for American Society for Testing and Materials (ASTM)

American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:06Z
Check the source to verify that this is the current version before use.

Delete and substitute: Table I. Dimensions and data.

Table I. Dimensions and data.

PIN [1/]	Strand wire size (AWG)	Tubular inside diameter (inch [2/])	Number of carriers	Number of ends	Current rating [3/] (amps)	Approx. AWG equivalent	Flat Form width X thickness [2/]
QQB575*36*0031	36	0.031	24	24	7.0	22	0.046X0.020
QQB575*36*0062	34	0.062	24	48	11.0	19	0.093X0.031
QQB575*34*0062	34	0.062	16	32	11.0	19	-
QQB575*32*0062	32	0.078	16	16	9.0	20	-
QQB575*36*0078	36	0.109	24	72	16.0	18	0.125X0.020
QQB575*36*0109	36	0.109	24	96	19.0	16	0.156X0.031
QQB575*34*0109	34	0.109	16	64	19.0	16	-
QQB575*32*0109	32	0.125	16	32	18.0	17	-
QQB575*36*0125	36	0.125	24	120	25.0	15	0.187X0.020
QQB575*34*0125	34	0.125	24	72	19.0	16	-
QQB575*32*0125	32	0.156	24	48	25.0	15	-
QQB575*36*0156	36	0.171	24	240	40.0	12	0.250X0.046
QQB575*36*0171	36	0.171	24	168	32.0	14	0.250X0.030
QQB575*34*0171	34	0.171	24	120	36.0	13	-
QQB575*32*0171	32	0.203	24	72	32.0	14	-
QQB575*36*0203	36	0.203	24	312	46.0	11	0.281X0.046
QQB575*34*0203	34	0.203	24	192	46.0	11	-
QQB575*32*0203	32	0.250	24	120	46.0	11	-
QQB575*36*0250	36	0.281	24	384	53.0	10	-
QQB575*30*0281	30	0.375	24	120	60.0	9	-
QQB575*36*0375	36	0.375	48	384	53.0	10	0.625X0.030
QQB575*34*0375	34	0.375	48	240	53.0	10	-
QQB575*32*0375	32	0.375	48	144	46.0	11	-
QQB575*30*0375	30	0.375	24	168 [4/]	75.0	8	-
QQB575*30*0437	30	0.437	24	240	90.0	6	0.500X0.093
QQB575*36*0500	36	0.500	48	528	62.0	9	0.625X0.46
QQB575*34*0500	34	0.500	48	336	62.0	9	-
QQB575*32*0500	32	0.500	48	192	62.0	9	-
QQB575*30*0500	30	0.500	24	360	120.0	6	0.625X0.093
QQB575*30*0562	30	0.562	48	480	145.0	3	-
QQB575*30*0656	30	0.656	48	768	190.0	1	-
QQB575*36*0781	36	0.781	48	586	88.0	7	0.750X0.040
QQB575*34*0781	34	0.781	48	428	88.0	7	-
QQB575*32*0781	32	0.781	48	336	88.0	7	-
QQB575*30*0875	30	0.875	48	336	100.0	5	1.375X0.050
QQB575*30*1000	30	1.000	48	384	120.0	4	-
QQB575*30*1125	30	1.125	48	432	130.0	4	-
QQB575*30*1375	30	1.375	48	528	150.0	3	1.500X0.060

1/ The complete PIN will include additional information to indicate the form (first asterisk) and strand coating (second asterisk) (see 1.2.1).

2/Tolerances are as follows:

Dimensions	Tolerances
0.000-0.099	0.010
0.100-0.249	0.016
0.250-0.499	0.031
0.500-0.999	0.063
Over-0.999	0.094

3/ Direct current ratings are given for information only and are not requirements. Values shown are for uninsulated braid in free air at 30°C (80°f). Values should be derated if the braid is insulated or in close contact with other components.

4/ The PIN supersedes the similar construction using 96 ends (NSN 6145-00-191-8402).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:06Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - AS
Air Force - 85

Preparing Activity:
DLA-IS

(Project 6145-2145)

Review activity:
Army - AR, AT, AV, ME, MI
Navy - MC, OS, SH
DLA – CC
NSA – NS
DNA - DS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:06Z
Check the source to verify that this is the current version before use.