MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, PLASTIC DIELECTRIC, DC,
IN NONMETAL CASES, ESTABLISHED RELIABILITY,
STYLE CFR04

This amendment forms a part of Military Specification Sheet MIL-C-55514/3C, dated 20 January 1971, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, Radial style, delete and substitute:

"

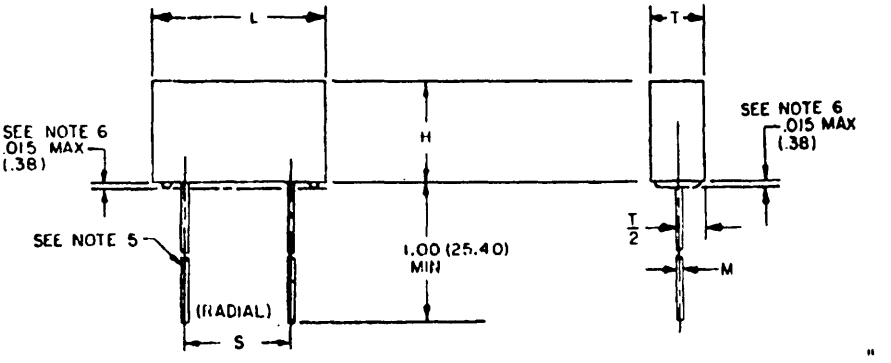

"

* FIGURE 1, NOTES: After note 6, add the following:

"7. Lead length of axial style may be a minimum of 1-inch long for use in tape and reel packaging when specified in the ordering data."

PAGE 2

TABLE I, lines 21 through 25 (capacitance values of .047 through .100 uF): Delete "C" and substitute "J" in last column.

PAGE 3

TABLE II, line 3: Delete case size "C" with all related dimensions.

NOTE: The margin of this amendment is marked with an asterisk to indicate where the change (addition) from the previous amendment was made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent:
DLA - ES

(Project 5910-1315-3)

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:28Z
Check the source to verify that this is the currentversion before use.