INCH-POUND


MIL-DTL-55116/16
20 April 2018

DETAIL SPECIFICATION SHEET

CAP, PROTECTIVE

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55116.

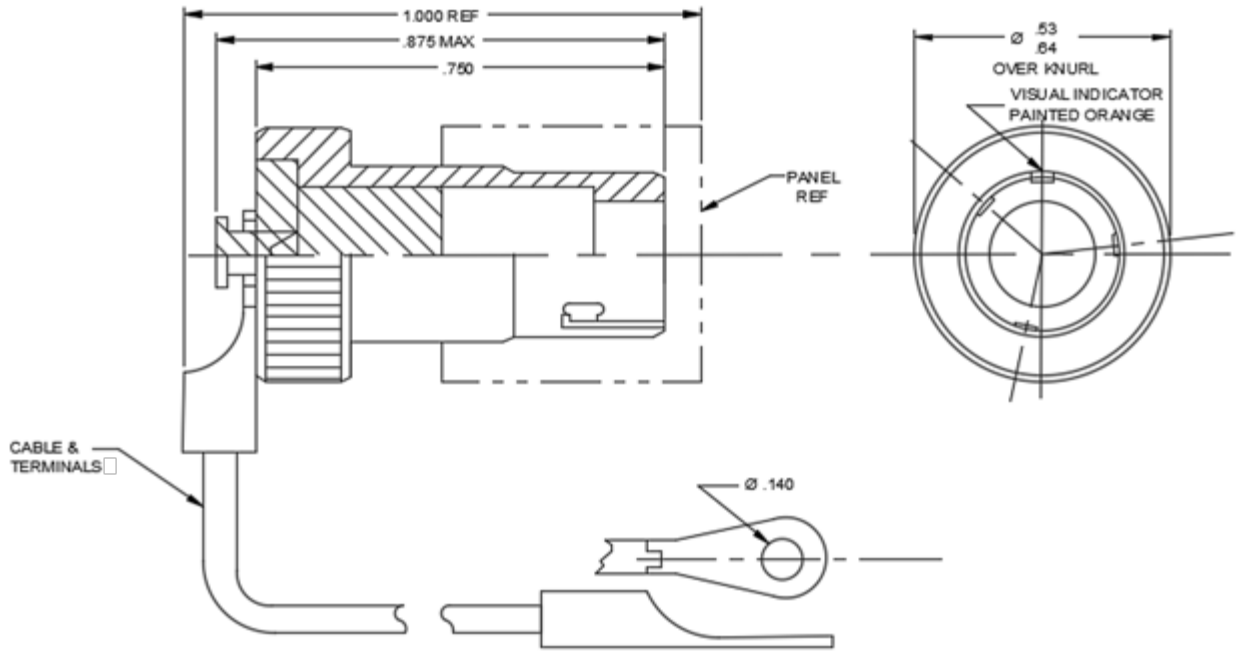

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Stamp or etch 1/16 San Serif characters in accordance with MIL-STD-130.

FIGURE 1. Cap, Protective.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.

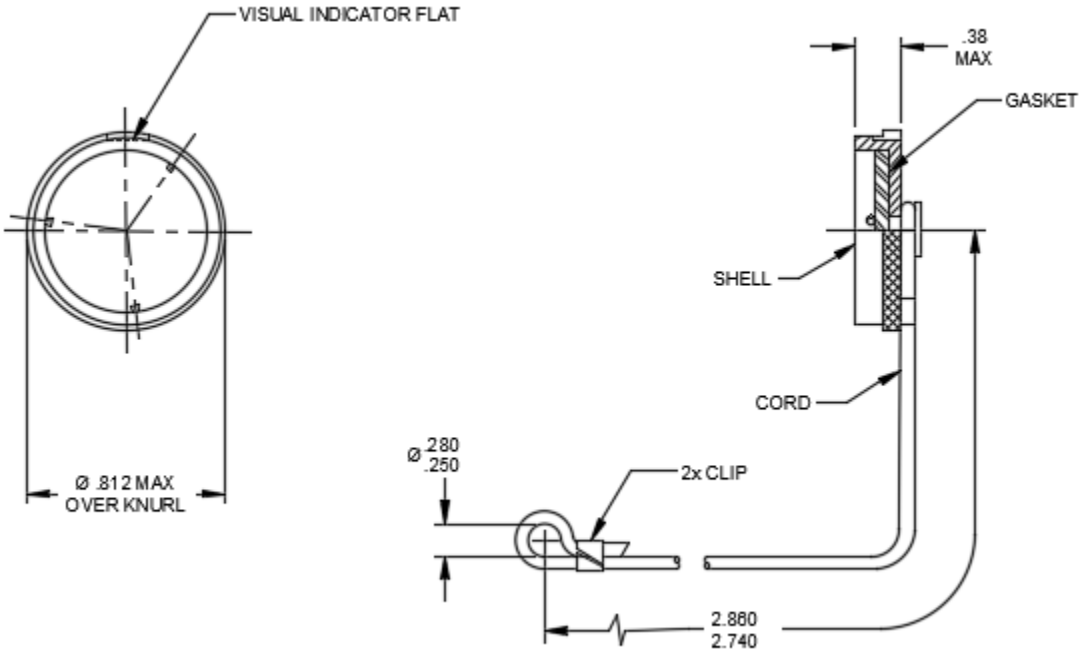


FIGURE 1. Cap, Protective - Continued.

ENGINEERING DATA:

Temperature rating; -65°C to +125°C.

REQUIREMENTS:

Design and configurations: See figure 1.

Corrosion (salt spray): MIL-STD-202-101, test condition B.

PIN (Part or Identifying Number):

PIN	Dash Number	Cable Length ±0.125
M55116/16-X	-1	2.750
M55116/16-X	-2	6.000

Reference documents. In addition to MIL-DTL-55116, this document references the following:

MIL-STD-130
MIL-STD-202-101

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-059)

Review activity:
Army – MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:25Z
Check the source to verify that this is the current version before use.