INCH-POUND

MIL-F-70518 (AR)
AMENDMENT 3
05 December 1995
SUPERSEDING
AMENDMENT 2
22 August 1990

MILITARY SPECIFICATION

FLARE, INFRARED TRACKING, MARK 33 MOD 0 (ARMY)
PARTS FOR AND LOADING, ASSEMBLING AND PACKING

This Amendment forms a part of Military Specification MIL-F-70518 (AR), dated 14 December 1984, and is approved for use by the U.S. Army Armament, Research, Development and Engineering Center and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Substitute included "Figure 1".

PAGE 4

3.2.1.1: Title "Flare and first fire composition." change to "Flare, first fire and igniter composition."

PAGE 5

3.5.2: Under "Rise Time", change "0.50 seconds" to "0.8 seconds".

PAGE 7

TABLE I: Under "Plug", change "Plug (Dwg. 9387060)" to "Plug Assembly (Dwg. 12624489)" and delete "/cavity" and "Note 1".

Under "MK33MOD 0 infrared tracking flare", add to transportation vibration "Note 3" in AQL column.

Delete "Ignition and infrared output, 40, Note 3, 3.5.3, 4.5.4.1".

Delete Note 2 and replace with "Box, Ammunition, M2A1, 25 flares per box.".

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

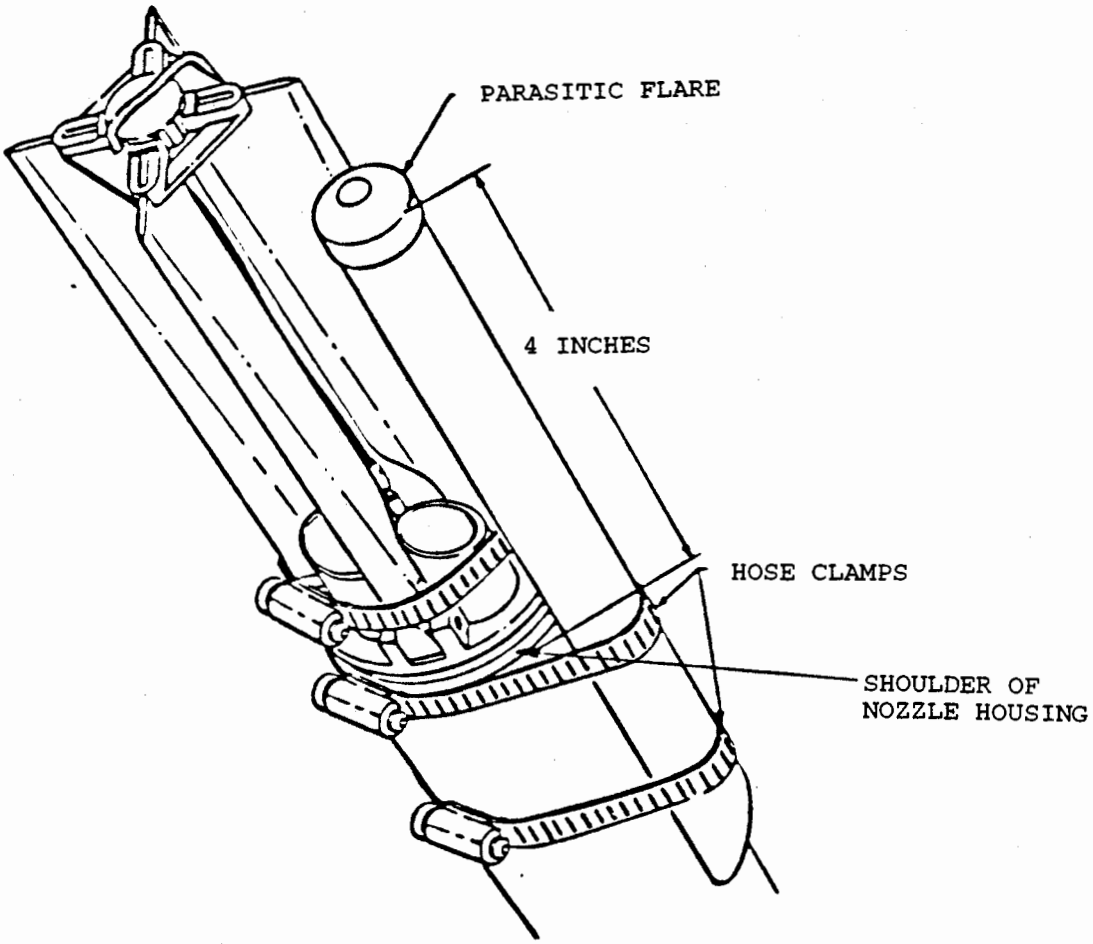


FIGURE I: Method for Mounting the MK33 MOD 0 (Army) Flare on the 2.75 Rocket Motor

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

PAGE 8

TABLE I: Under "Forty-foot drop", delete "3.5.5" and replace with "3.3.5".

Delete "Note 3" and replace with "Test sequentially as noted. Function 20 each for IR output after T-V & T-H; 20 each after low and 40 each after high temperature conditioning."

PAGE 9

TABLE II: Change "1,101-3,000" to "1001-3000".

PAGE 10

Paragraph 4.4.2.1

Change Major defect 101 to read:

"Outside diameter (case end) .40% 3.2 Gage"

Change Major defect 105 to read:

"Length, case end to flange .40% 3.2 Gage"

PAGE 12

4.4.2.3: Delete "Note 1" 3 places in AQL or 100% column.

Delete "Note 1" in its entirety.

Delete "Dwg. No." and replace with "Dwg. 12624489".

Add "Assembly" to Title.

Add Major 103 "Disk missing or not attached properly, 3.2, visual/gage".

PAGE 17

4.5.1.5: Parasitic ignition test. Delete "(Destructive test)" and substitute: "Any flare failing to meet the applicable requirements shall be considered defective and shall cause the represented lot to be rejected (Destructive test)".

PAGE 18

* 4.5.2: Radiographic Examination. Delete "One exposure shall be made of each flare with the longitudinal axis of the flare" and substitute "One exposure shall be made perpendicular to the longitudinal axis of the flare".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

* 4.5.2.1: Radiographic Sensitivity. Delete "(Penetrameter for .62 inch aluminum or 1.0 inch magnesium is acceptable)" and substitute "(Penetrameter for .87 inch aluminum, 1.3 inch magnesium or .37 inch iron is acceptable)".

4.5.3.1: Title "Flare and first fire composition." change to "Flare, first fire and igniter composition.".

4.5.4.1: Under "Ignition and infrared output"

Replace the second paragraph with:

"To prepare flare for test, remove the end cap and the plug assembly. Take an M100 Electric Match, spread the lead wires and insert into the flare such that the match head is in contact with the igniter composition. Replace the plug assembly into the flare such that the electric match lead wires are 180 degrees apart. Do not use any tape to secure the plug or electric match. Proper grounding/shorting of the electric match leads must be accomplished as a safety precaution. Note: Be sure that the electric match lead wires are not grounded/shorted on the aluminum disk, otherwise non-ignition will occur."

PAGE 19

4.5.4.1: Under "Ignition and infrared output" change "(d) The time above 230 watts/steradian" to "(d) This average output as per 3.5.3".

Change "(e) The average intensity = (Integral/(b))" to "(e) The rise time as per 3.5.2".

PAGE 20

5: Delete in its entirety and substitute:

5 PACKAGING

5.1 Preservation.

5.1.1 Level A. Level A preservation shall be in accordance with Dwg. 12590214.

5.1.2 Level B. Level B preservation shall be the same requirements as for Level A.

5.1.3 Level C. Level C preservation shall be the same requirements as for Level A.

5.2 Packing.

5.2.1 Level A. Level A packing shall be in accordance with Dwg. 12597933.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Level B packing shall be the same requirements as for Level A.

5.2.3 Level C. Level C packing shall be the same requirements as for Level A.

5.3 Marking.

5.3.1 Level A. Level A marking shall be in accordance with Dwgs. 12590214 and 12597933.

5.3.2 Level B. Level B marking shall be the same requirements as for Level A.

5.3.3 Level C. Level C marking shall be the same requirements as for Level A.

NOTE: The margins of this amendment are marked with an asterisk or vertical line to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1370-0005)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:36Z
Check the source to verify that this is the current version before use.