INCH-POUND

MIL-T-55164/9A

21 November 1988

SUPERSEDING
MIL-T-55164/9
30 June 1967

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 3TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

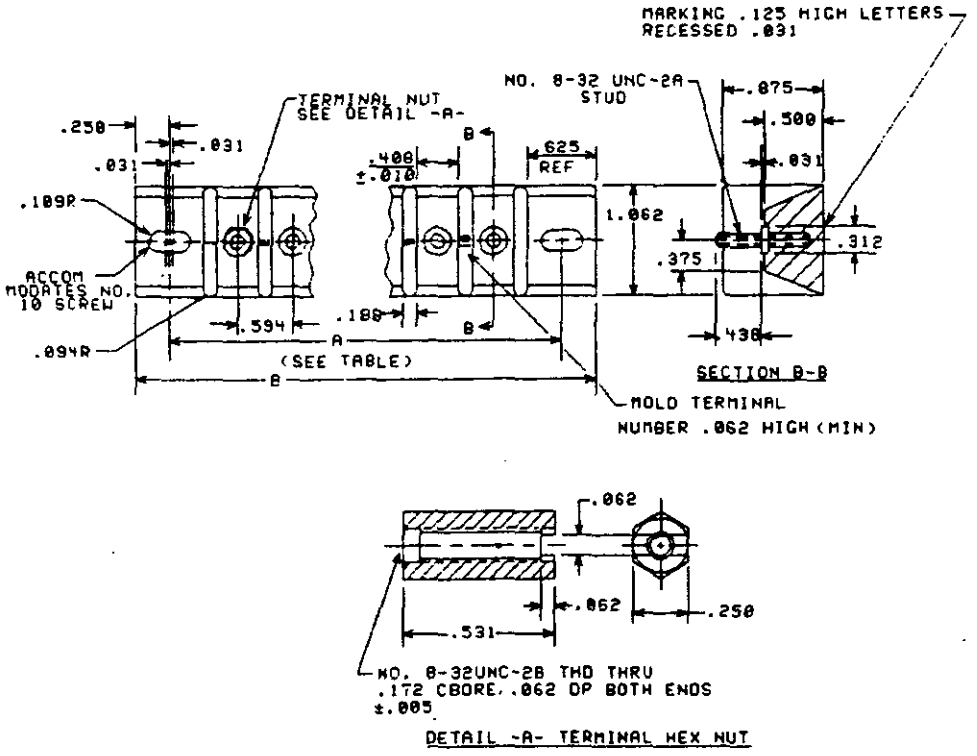


Figure 1. Dimensions and Configuration.

AMSC N/A

FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±0.016 inch.
4. Studs shall be threaded to within 0.046 inch of the stud shoulder.

Type designation	Dimensions		Terminal nuts required
	A+.047, -.031	B+.047, -.062	
	inch (mm)	inch (mm)	
3TB10F	6.875 (174.63)	7.375 (187.33)	10

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table.

Voltage rating (maximum): 600 volts.

Current rating : 45 amps.

Maximum number of terminal lugs for each stud: 4.

Recommended wire terminal lugs:

MIL-T-16366	MS-17143
L-80	-1
	-2
	-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Plastic material: Type GDI-30F or MAI-60 of MIL-M-14.

Dielectric withstanding test voltage: 2,200 volts rms.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:

Army-ER
Navy-
Air Force-85

Review Activities:
Army-MI
Navy-
Air Force - 99
DLA - GS

User Activities:
Army-AV, AT, ME
Navy-AS, MC, SH
Air Force - 11

Preparing Activity:

Army-ER

(Project 5940-1017-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.