The documentation and process conversion measures necessary to comply with this revision shall be completed by 1 June 2012.

INCH-POUND

MIL-PRF-19500/159P
w/AMENDMENT 1
1 March 2012
SUPERSEDING
MIL-PRF-19500/159P
4 February 2009

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, TEMPERATURE COMPENSATED, VOLTAGE-REFERENCE, TYPES 1N821-1, 1N823-1, 1N825-1, 1N827-1, AND 1N829-1, 1N821UR-1, 1N823UR-1, 1N825UR-1, 1N827UR-1, AND 1N829UR-1, JAN, JANTX, JANTXV, JANS, JANHC AND JANKC; RADIATION HARDENED (TOTAL DOSE ONLY) TYPES JANTXVM, D, L, R, F, G, H; JANSM, D, L, R, F, G, H; JANHCM, D, L, R, F, G, H; AND JANKCM, D, L, R, F, G, H

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for 6.2 volts ±5 percent, silicon, temperature compensated, voltage-reference diodes. Four levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500, and two levels of product assurance are provided for each unencapsulated device type. Seven levels of radiation hardened (total dose only) product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500, and two levels of product assurance for each unencapsulated device type.

* 1.2 Physical dimensions. See figure 1 (similar to DO-7 and DO-35), figure 2 (similar to DO-213AA), figure 3 (JANHCA and JANKCA), figure 4 (JANHCB and JANKCB) figure 5 (JANHCC and JANKCC), and figure 6 (JANHCD and JANKCD).

1.3 Maximum ratings. Unless otherwise specified T_A = +25°C.

P_T (1)	T_{STG} and T_J	I_{ZM} (1)	Power derating above T_A = +25°C
mW	°C	mA dc	mW/°C
500	-55 to +175	70	3.33

(1) To guarantee voltage temperature stability, it is necessary to maintain the proper I_Z = 7.5 mA dc.

* Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil.

AMSC N/A

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, primary electrical characteristics at T_A = +25°C.

Type (1)	ΔV_Z (voltage temperature stability) (1)	Z_Z (1)	V_Z (1)		I_R V_R = 3.0 V
			Min	Max	
	mV dc	ohms	Volts	Volts	μA
1N821-1, 1N821UR-1	96	15	5.89	6.51	2.0
1N823-1, 1N823UR-1	48	15	5.89	6.51	2.0
1N825-1, 1N825UR-1	19	15	5.89	6.51	2.0
1N827-1, 1N827UR-1	9	15	5.89	6.51	2.0
1N829-1, 1N829UR-1	5	15	5.89	6.51	2.0

(1) To guarantee voltage temperature stability, it is necessary to maintain the proper I_Z of 7.5 mA dc.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500-Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750-Test Methods for Semiconductor Devices.

* (Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or https://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

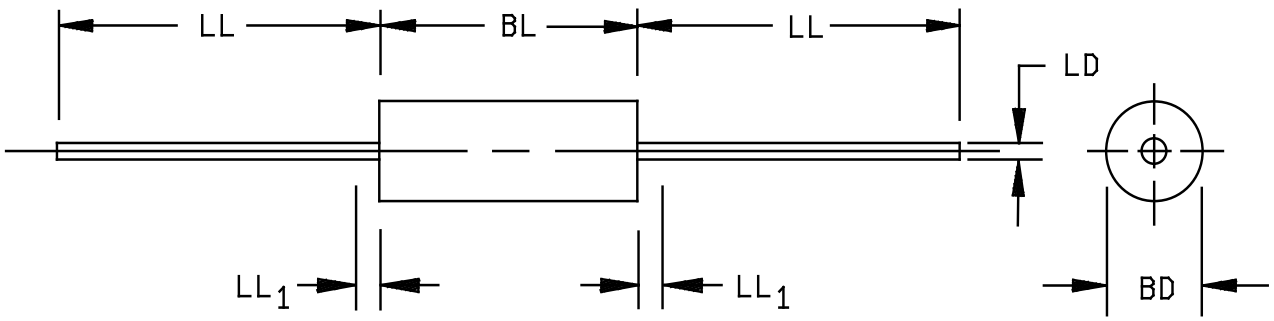


Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.060	.107	1.52	2.72	3
BL	.120	.300	3.05	7.62	3
LD	.018	.023	0.46	0.58	
LL	1.000	1.500	25.40	38.10	
LL_1		.050		1.27	4

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Package contour optional within BD and length BL. Heat slugs, if any shall be included within this cylinder but shall not be subject to minimum limit of BD.
4. Within this zone, lead diameter may vary to allow for lead finishes and irregularities, other than heat slugs.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 1. Physical dimensions, 1N821-1 through 1N829-1 (similar to DO-7 and DO-35).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

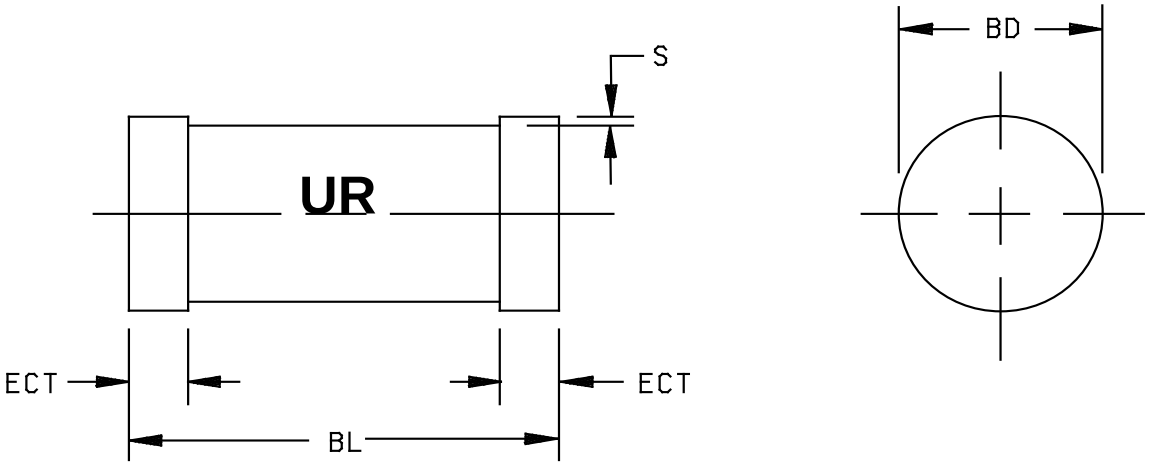


Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	.063	.067	1.60	1.70
BL	.130	.146	3.30	3.71
ECT	.016	.022	0.41	0.56
S	.001 Min		0.03 Min	

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 2. Physical dimensions, 1N821UR-1 through 1N829UR-1 (DO-213AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.0280	.0320	.711	.813
B	.0080	.0100	.203	.254
C	.0104	.0106	.264	.269
D	.0019	.0021	.048	.053
E	.0054	.0056	.137	.142
F	.0020	.0040	.050	.102
G	.0280	.0320	.711	.813
H	.0030	.0050	.076	.127
J	.0030	.0050	.076	.127
K	.0209	.0211	.531	.536
L	.0080	.0100	.203	.254
M	.0104	.0106	.264	.269
N	.0059	.0061	.150	.155

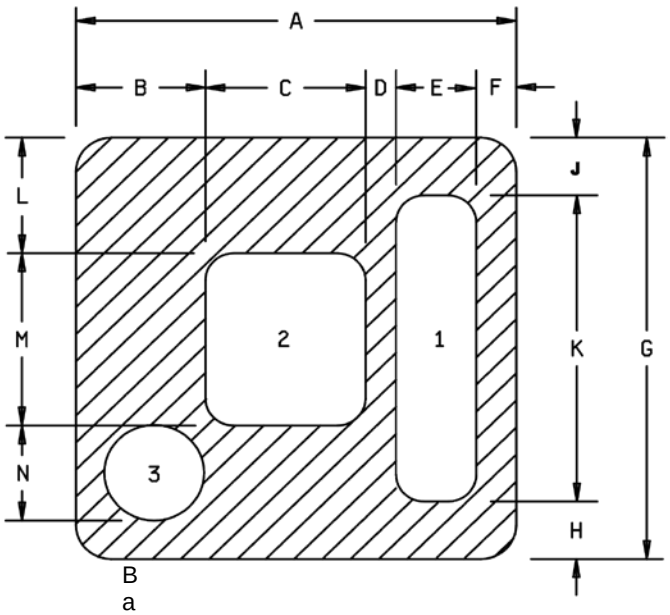

B
a
ckside must be electrically isolated to ensure proper performance.

Design data

Metallization:


Top:	1 (Cathode)	Al	Circuit layout data:
	2 (Anode)	Al	For zener operation, cathode must be operated positive with respect to anode.
	3 (Test pad)	Al	Test pad is for wire bond evaluation only. No electrical contact is made with test pad.
Back:		Au	

Al thickness	25,000Å minimum.
Gold thickness	4,000Å minimum.
Chip thickness	.010 inch (0.25 mm) ±0.002 inch (±0.05 mm).

NOTES:
1. Dimensions are in inches unless otherwise indicated.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 3. JANHC and JANKC (A-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

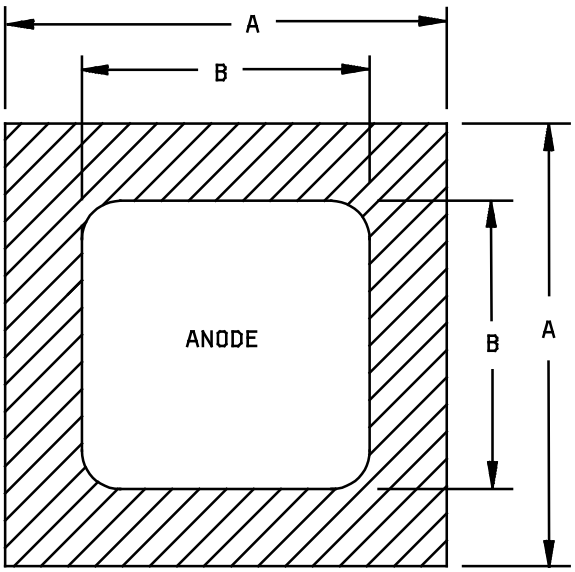

BACKSIDE IS CATHODE

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.024	.037	0.61	0.94
B	.014	.029	0.36	0.74

Design data


Metallization:
Circuit layout data: Top: (Anode) . . . Al
For zener operation, cathode must be
operated positive with respect to anode. Back . . . . . Au

Al thickness . . . . . 40,000Å minimum
Gold thickness . . . . . 5,000Å minimum
Chip thickness . . . . . .010 inch (0.25 mm) ±.002 inch (±0.05 mm).

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 4. JANHC and JANKC (B-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

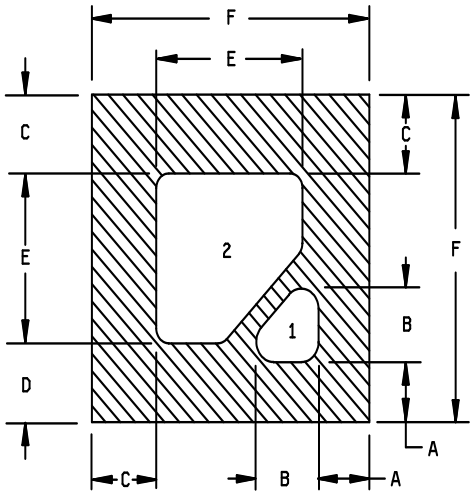

BACKSIDE MUST BE ELECTRICALLY ISOLATED

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.0035	.0065	.088	.165
B	.0050	.0080	.127	.203
C	.0050	.0065	.127	.165
D	.0050	.0065	.127	.165
E	.0150	.0165	.381	.419
F	.0260	.0290	.660	.737

Design data


Metallization:
Circuit layout data: Top: 1 Cathode . . . . . Al
2 Anode. . . . . .Al
Back . . . . . Au
For zener operation, cathode must be operated positive with respect to anode; must be electrically isolated

Al thickness . . . . . 40,000Å minimum
Gold thickness . . . . . 5,000Å minimum
Chip thickness . . . . . .010 inch (0.25 mm) ±.002 inch (±0.05 mm).

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 5. JANHC and JANKC (C-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

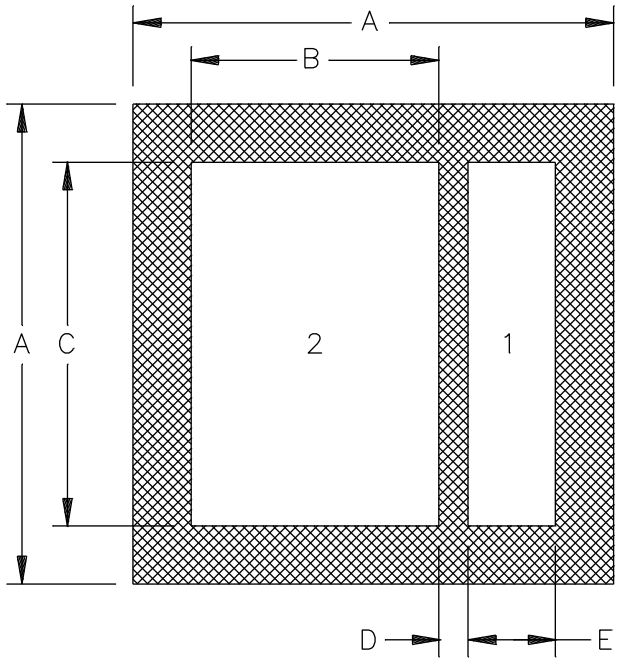

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	.031	.035	0.787	0.889
B	.016	.018	0.406	0.457
C	.024	.026	0.610	0.660
D	.001	.003	0.025	0.076
E	.005	.007	0.127	0.178
F	.008	.012	0.203	0.305

Design data

Metallization:
Circuit layout data: Top: 1 Cathode . . . . . Al
2 Anode. . . . . .Al
Back . . . . . Au

Al thickness . . . . . 35,700Å minimum
Au thickness . . . . . 3,570Å minimum
Chip thickness . . . . . .010 inch (0.25 mm) ±.002 inch (±0.05 mm).

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

* FIGURE 6. JANHC and JANKC (D-version) die dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

* 3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1, 2, 3, 4, 5, and 6 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Diode construction. These devices shall be constructed in a manner and using material which enable the diodes to meet the applicable requirements of MIL-PRF-19500 and this document.

3.5.1 Dash-one construction. Shall be as specified in MIL-PRF-19500.

3.5.2 JANS construction. Construction shall be dash-one, category I or II metallurgical bond in accordance with MIL-PRF-19500.

3.5.3 JANHC and JANKC construction. JANHC and JANKC construction may differ in die size and bonding pad layout provided the manufacturing technology is identical (example: diffused junction, alloy junction).

3.6 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6.1 Marking of "UR" version devices. For "UR" version devices only, all marking (except polarity) may be omitted from the body, but shall be retained on the initial container.

3.7 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.8 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2 and 4.4.3.

3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4 VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.1.1 Sampling inspection. Sampling inspection shall be in accordance with MIL-PRF-19500 and as specified herein, except that lot accumulation period shall be 3 months in lieu of 6 weeks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E inspection. Group E inspection shall be conducted in accordance with MIL-PRF-19500 and 4.4.5 herein.

4.2.2 JANHC and JANKC devices. Qualification for JANHC and JANKC devices shall be in accordance with MIL-PRF-19500.

4.2.2.1 Radiation hardened devices. See MIL-PRF-19500 and 4.4.4 herein.

* 4.3 Screening (JANS, JANTXV and JANTX levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table E-IV of MIL-PRF-19500)	JANS level	JANTXV and JANTX level
3b 3c	Not applicable Not applicable	Not applicable Not applicable
4	Not applicable	Not applicable
5	Not applicable	Not applicable
6	Not applicable	Not applicable
10	Not applicable	Not applicable
11	Required V_Z, Z_Z	Required V_Z, Z_Z
12	Required see 4.3.1	Required see 4.3.1
13	Required Subgroups 2 and 3 of table I herein; $\Delta Z_Z \leq \pm 15$ percent of initial reading T_A = +25°C ±2°C, $\Delta V_Z \leq \pm 0.004$ V dc from initial value for 1N821-1, 1N821UR-1, 1N823-1, 1N823UR-1, 1N825-1 1N825UR-1 $\Delta V_Z \leq \pm 0.003$ V dc from initial value for 1N827-1, 1N827UR-1, 1N829-1, 1N829UR-1	Required Subgroups 2 of table I herein; $\Delta Z_Z \leq \pm 15$ percent of initial reading T_A = +25°C ±2°C, $\Delta V_Z \leq \pm 0.004$ V dc from initial value for 1N821-1, 1N821UR-1, 1N823-1, 1N823UR-1, 1N825-1 1N825UR-1 $\Delta V_Z \leq \pm 0.003$ V dc from initial value for 1N827-1, 1N827UR-1, 1N829-1, 1N829UR-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows: I_Z = 7.5 mA dc, ±0.75 mA dc, T_A = +150°C, +5°C, -0°C.

4.3.2 Screening (JANHC and JANKC). Screening of JANHC and JANKC die shall be in accordance with MIL-PRF-19500.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIa (JANS) and table E-VIb (JAN, JANTX, JANTXV) of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable steps of table I, subgroup 2 herein.

* 4.4.2.1 Group B inspection, table E-VIa (JANS) of MIL-PRF-19500. For purposes of JANS inspection, a single device type shall be defined as devices from a single wafer lot (for each die type used in the construction). The conformance inspection sample shall be selected from the part category with the lowest ΔV_Z rating in the inspection lot.

Subgroup	Method	Conditions
B3	1056	Test condition A, 25 cycles.
B3	4066	Not applicable.
B3	1071	Test condition E.
B4	1037	I_Z = 35 mA dc at T_A = room ambient; t_{on} = t_{off} = 30 seconds minimum for 4,000 cycles. Forced air cooling allowed during off cycle.
B5	1027	I_{ZM} = 70 mA dc for 96 hours. T_A = +75°C, adjust T_A to achieve T_J = +200°C minimum.
B6		Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

* 4.4.2.2 Group B inspection, table E-VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Conditions
B2	1056	Test condition A, 25 cycles.
B2	4066	Not applicable.
B2	1071	Test condition E.
B3	1027	See 4.3.1.
B5		Not applicable.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500. Electrical measurements (end-points) requirements shall be in accordance with the applicable steps of table I, subgroup 2 herein.

* 4.4.3.1 Group C inspection, table E-VII of MIL-PRF-19500.

Subgroup	Method	Conditions
C2	1056	Test condition A, 25 cycles.
C2	2036	Lead tension: Test condition A; 10 pounds weight, t = 15 ±3 seconds. Lead fatigue: Test condition E (lead fatigue test is not applicable to surface mount "UR" version device).
C2	1071	Test condition E.
C3		Not applicable.
C5		Not applicable.
C6	1026	I_Z = 7.5 mA dc, T_A = +100°C minimum. (see 4.5.2).
C7		Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

4.4.4 Group D inspection. Group D inspection shall be conducted in accordance with table E-VIII of MIL-PRF-19500 and table II herein. Submitted lots for group D sample inspection must be constructed using one homogeneous wafer lot for the zener and one wafer lot for the compensating die (die), as also described in the submitted DSCC Design and Construction form 36D (see table II herein).

4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup tests in table E-IX of MIL-PRF-19500 and table III herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Voltage-temperature stability. The breakdown voltage of each diode type shall be measured and recorded at each of the specified temperatures. The lowest measured voltage shall be subtracted from the highest measured voltage for each diode. The difference value obtained shall not exceed the specified ΔVZ per diode type.

4.5.2 Reference voltage time stability. The breakdown voltage shall be measured prior to life testing at 340 hours, and at the conclusion of the life test. The 340-hour reading shall be compared with the 0-hour reading and the 1,000-hour reading compared with the 340-hour reading. The change in breakdown voltage shall not exceed the limits specified. The test temperature for breakdown voltage shall be the same as the specified ambient life test temperature (see table IV herein).

4.5.3 Reference voltage. The test current shall be applied until thermal equilibrium is attained (15 seconds minimum) prior to reading the reference voltage. For this test, the diode shall be suspended by its leads with mounting clips whose inside edge is located between .375 inch (9.53 mm) and .500 inch (12.70 mm) inch from the body and the mounting clips shall be maintained at the specified temperature. This measurement may be performed after a shorter time following application of the test current than that which provides thermal equilibrium if correlation to stabilized readings can be established to the satisfaction of the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Reference voltage (see 4.5.3)	4022	I_Z = 7.5 ±0.01 mA dc	V_Z	5.89	6.51	V dc
Small-signal breakdown impedance	4051	I_Z = 7.5 ±0.01 mA dc, I_{sig} = 0.75 mA ac	Z_Z		15	ohms
Subgroup 3						
Voltage temperature stability (see 4.5.1 and 4.5.3)		I_Z = 7.5 ±0.01 mA dc, T_A = -55°C, 0°C. +25°C, +75°C, +100°C ±2°C, I_Z = (see 1.4)	ΔV_Z			
1N821-1, 1N821UR-1					96	mV dc
1N823-1, 1N823UR-1					48	mV dc
1N825-1, 1N825UR-1					19	mV dc
1N827-1, 1N827UR-1					9	mV dc
1N829-1, 1N829UR-1					5	mV dc
Subgroups 4, 5, and 6						
Not applicable						
Subgroup 7						
Reverse current leakage	4016	DC method; V_R = 3.0 V dc	I_R		2.0	µA

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection.

Inspection 1/ 2/	MIL-STD-750		Symbol	JANS and JANTXV Pre-irradiation limits		JANS and JANTXV Post-irradiation limits		ΔV_{Z1} Pre-post I_{RRAD} change		Unit
	Method	Conditions		M, D, L, R, F, G, and H		M, D, L, R, F, G, and H				
				Min	Max	Min	Max	Min	Max	
Subgroup 1										
Not applicable										
Subgroup 2		T_C = +25°C								
Steady-state total dose irradiation	1019	I_Z = 7.5 mA dc Condition A								
Reference voltage (see 4.5.3)	4022	I_Z = 7.5 mA dc ±0.01 mA dc	V_Z	5.89	6.51	5.89	6.51			V dc
Small-signal breakdown Impedance	4051	I_Z = 7.5 mA dc I_{stg} = 0.75 ac	Z_Z		15		15			ohms
Reverse current leakage	4016	DC method; V_R = 3.0 V dc	I_R		2.0		2.0			µA
Voltage stability (see 4.5.3)	4022	I_Z = 7.5 mA dc ±0.01 mA dc T_A = 25°C ± 2°C	ΔV_Z							
1N821-1, 1N821UR-1									±3.0	mV
1N823-1, 1N823UR-1									±3.0	mV
1N825-1, 1N825UR-1									±2.0	mV
1N827-1, 1N827UR-1									±1.5	mV
1N829-1, 1N829UR-1									±1.0	mV

1/ For sampling plan, see MIL-PRF-19500.
2/ Group D qualification may be performed any time prior to lot formation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

* TABLE III. Group E inspection qualification and requalification (all product assurance levels).

Inspection	MIL-STD-750		Qualification conformance inspection (sampling plan)
	Method	Conditions	
Subgroup 1			45 devices, c = 0
Temperature cycling	1051	500 cycles.	
Electrical measurements		See table I, subgroup 2 herein.	
Subgroup 2			45 devices, c = 0
Steady state operation life	1038	Condition B, 1,000 hours. (see 4.3.1).	
Electrical measurements		See table I, subgroup 2 herein.	
Subgroups 4, 5, 6, and 7			
Not applicable			
Subgroup 8			
Resistance to glass cracking	1057	Step stress to destruction by increasing cycles or up to a maximum of 25 cycles.	45 devices

TABLE IV. Reference voltage time stability.

Inspection	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Reference-voltage time stability		T_A = +100°C ±2°C, I_Z = 7.5 ±0.01 mA dc, (see 4.5.2 and 4.5.3)	ΔV_Z			
1N821-1, 1N821UR-1		0 to 340 hours			7	mV dc
1N823-1, 1N823UR-1					7	mV dc
1N825-1, 1N825UR-1					7	mV dc
1N827-1, 1N827UR-1					6	mV dc
1N829-1, 1N829UR-1					5	mV dc
1N821-1, 1N821UR-1		340 to 1,000 hours			4	mV dc
1N823-1, 1N823UR-1					4	mV dc
1N825-1, 1N825UR-1					4	mV dc
1N827-1, 1N827UR-1					3	mV dc
1N829-1, 1N829UR-1					3	mV dc

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

* 6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.1).

d. Product assurance level and type designator.

* 6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil . An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.

* 6.4 Suppliers of JANHC and JANKC die. The qualified JANHC and JANKC suppliers with the applicable letter version (example JANHCAM1N821) will be identified on the QML.

JANC ordering information							
PIN	Manufacturer						
	43611	43611 Radiation Designators M, D, L, R, F, G, H	12954	12954 Radiation designators M, D, L, R, F, G, H	12954 Radiation designators M, D, L, R, F, G, H	52GC4	52GC4 Radiation designators M, D, L, R, F, G, H
1N821	JANHCA1N821 JANKCA1N821	JANHCA1N821 JANKCA1N821	JANHCB1N821 JANKCB1N821	JANHCB1N821 JANKCB1N821	JANHCC1N821 JANKCC1N821	JANHCD1N821 JANKCD1N821	JANHCD1N821 JANKCD1N821
1N823	JANHCA1N823 JANKCA1N823	JANHCA1N823 JANKCA1N823	JANHCB1N823 JANKCB1N823	JANHCB1N823 JANKCB1N823	JANHCC1N823 JANKCC1N823	JANHCD1N823 JANKCD1N823	JANHCD1N823 JANKCD1N823
1N825	JANHCA1N825 JANKCA1N825	JANHCA1N825 JANKCA1N825	JANHCB1N825 JANKCB1N825	JANHCB1N825 JANKCB1N825	JANHCC1N825 JANKCC1N825	JANHCD1N825 JANKCD1N825	JANHCD1N825 JANKCD1N825
1N827	JANHCA1N827 JANKCA1N827	JANHCA1N827 JANKCA1N827	JANHCB1N827 JANKCB1N827	JANHCB1N827 JANKCB1N827	JANHCC1N827 JANKCC1N827	JANHCD1N827 JANKCD1N827	JANHCD1N827 JANKCD1N827
1N829	JANHCA1N829 JANKCA1N829	JANHCA1N829 JANKCA1N829	JANHCB1N829 JANKCB1N829	JANHCB1N829 JANKCB1N829	JANHCC1N829 JANKCC1N829	JANHCD1N829 JANKCD1N829	JANHCD1N829 JANKCD1N829

6.5 Substitution of radiation hardened devices. See MIL-PRF-19500.

6.6 Substitution of ΔV_Z devices. Device types within this series with higher type numbers (lower ΔV_Z) are a direct one way substitution for lower type numbers (higher ΔV_Z).

* 6.7 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2012-025)

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19, 99

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:27Z
Check the source to verify that this is the current version before use.