MIL-S-19500/166C(NAVY)
AMENDMENT 3
18 December 1968
SUPERSEDING 1/
AMENDMENT 2
25 April 1966

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR,

TYPE 2N599

This amendment forms a part of Military Specification MIL-S-19500/166C(NAVY), 22 June 1964.

Page 1

Paragraph 1.2: Delete "To-9 (see figure 1)" and substitute "See figure 1 (TO-5)".

Page 2

Paragraph 3.4.1: Delete.

Paragraph 4.2.2.3: Delete.

Page 5

Table II, subgroup 3, Shock test, Specific Conditions column: Add "Pulse duration = 1 msec".

Page 7

Figure 1: Delete and substitute the attached figure 1.

1/ CHANGES FROM PREVIOUS ISSUE.- THE OUTSIDE MARGINS OF THIS DOCUMENT HAVE BEEN MARKED "#" TO INDICATE WHERE CHANGES (DELETIONS, ADDITIONS, ETC.) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS HAS BEEN DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENT OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT AS WRITTEN IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.


Review activities:
Navy - SH

User activities:
Navy - MC, CG, AS, OS

Preparing activity:
Navy - EC
(Project 5961-N213)

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 202610-18T13:28Z
Check the source to verify that this is the current version before use.

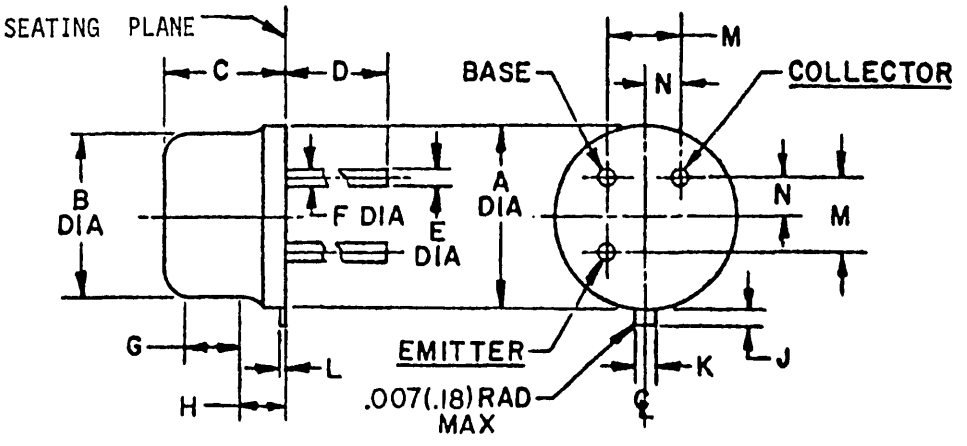

LTR	DIMENSIONS				NOTES
	INCHES		MILLIMETERS		
	MIN	MAX	MIN	MAX	
A	.335	.370	8.51	9.40	
B	.305	.335	7.75	8.51	
C	.240	.260	6.10	6.60	
D	1.500	–	38.10	–	9
E	.016	.021	.41	.53	2,9
F	.016	.019	.41	.48	3,9
G	.100	–	2.54	–	4
H	–	–	–	–	5
J	.029	.045	.74	1.14	8
K	.028	.034	.71	.86	
L	.009	.125	.23	3.18	
M	.1414 Nom		3.59 Nom		6
N	.0707 Nom		1.80 Nom		6

NOTES:
1. Metric equivalents in table and parentheses are shown for general information only and are based upon 1 inch = 25.4 mm.
2. Measured in the zone beyond .250(6.35) from the seating plane.
3. Measured in the zone .050(1.27) and .250(6.35) from the seating plane.
4. Variations on Dim B in this zone shall not exceed .010(.25).
5. Outline in this zone is not controlled.
6. When measured in a gaging plane $.054^{+.001}_{-.000}$ ($1.37^{+.03}_{-.00}$) below the seating plane of the transistor max dia leads shall be within .007(.18) of their true location relative to a maximum width tab. Smaller dia leads shall fall within the outline of the max dia lead tolerance. Fig. 2 shows preferred measured method.
7. # All leads to be electrically isolated from the case.
8. Measured from the maximum diameter of the actual device.
9. All 3 leads.

Figure 1. Physical dimensions of transistor type 2N599 (TO-5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:28Z
Check the source to verify that this is the current version before use.