INCH-POUND
MIL-PRF-26/5E
8 April 2022
SUPERSEDING
MIL-R-26/5D
w/ Amendment 3
11 December 2015

PERFORMANCE SPECIFICATION SHEET

RESISTOR, FIXED, WIREWOUND (POWER TYPE), STYLES RW70, RW74, RW78, and RW79

Inactive for new design after 11 May 1973.
For new design use MIL-PRF-39007. (See 6.4)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-26.

1. SCOPE

1.1 Scope. This specification covers the associated requirements for styles RW70, RW74, RW78, and RW79, wirewound inductive resistors.

1.2 Part or Identifying Number (PIN). Resistors covered by this specification are identified by a PIN, which consists of the style designation, characteristic, and coded resistive value. The PIN is derived in accordance with MIL-PRF-26 and is in the following form:

RW70	U	49R9	F
Style (1.2.1)	Characteristic (1.2.2)	Resistance (1.2.3)	Resistance tolerance (1.2.4)

1.2.1 Style. The style is identified by the two-letter symbol "RW" followed by a two-digit number.

1.2.2 Characteristic. The characteristic is identified by a single letter that identifies the maximum continuous operating temperature (surface hot spot), the minimum insulation resistance value at the end of the moisture resistance test, and the resistance temperature characteristic in accordance with table I.

Minimum and maximum resistance values are as specified herein. The standard values for every decade should follow the sequence demonstrated for the "10 to 100" decade in accordance with MIL-PRF-26.

Comments, suggestions, or questions on this document should be addressed to: DLA Land and Maritime, ATTN: VAT, Post Office Box 3990, Columbus, Ohio 43218-3990 or by email Resistor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/

AMSC N/A
FSC 5905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.

1.2.3 Resistance. The nominal resistance expressed in ohms is identified by a four-digit number; the first three digits represent significant figures and the last digit specifies the number of zeroes to follow. When resistance values less than 100 ohms are required, the letter "R" is substituted for one of the significant digits to represent the decimal point. When the letter "R" is used, succeeding digits of the group represent significant figures as shown in the following example.

R100 = 0.1 ohm
1R00 = 1.0 ohm
10R0 = 10.0 ohm

TABLE I. Characteristic.

Symbol	Maximum continuous operation temperature 1/	Minimum insulation resistance at end of moisture resistance	Resistance temperature characteristic (ppm/^{O}C)
U 2/	250°C	100 Megohms	0 ±30 ≥ 10 ohms
			0 ±50 ≥1 ohm to <10 ohms
			0 +400, -100 ≥ 0.499 ohm to < 1 ohm
			0 +650, -100 ≥ 0.1 ohm to < 0.499 ohm

1/ This temperature is also the maximum permissible hot-spot surface temperature.
2/ Inductive wirewound.

1.2.3.1 Replacement or maintenance (applicable to .1 and .5 percent tolerances). It is preferred that resistance values be selected as specified in MIL-PRF-26. However, if it is impracticable to do so, then any value (within specification limits) may be specified and these values shall be considered as conforming to the specification.

1.2.4 Resistance tolerance The resistance tolerance is identified by a single letter in accordance with table II.

TABLE II. Resistance tolerance.

Symbol	Resistance tolerance percent (±%)
B	0.1
D	0.5
F	1.0

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-26	-	Resistors, Fixed, Wirewound (Power Type), General Specification for.


(Copies of these documents are available online at https://quicksearch.dla.mil).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence unless otherwise noted. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The requirements for acquiring the product described herein shall consist of this document and MIL-PRF-26.

3.2 Interface and physical dimension. The resistor shall meet the interface and physical dimensions specified on figure 1 and as specified herein.

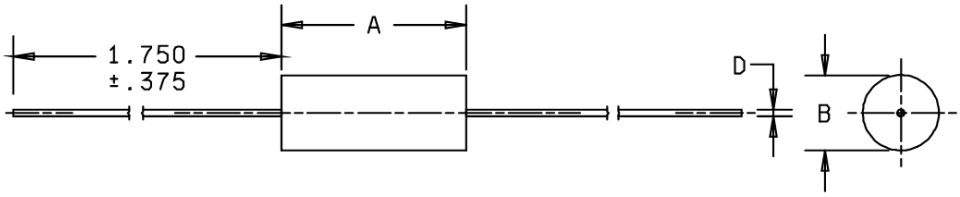

	RW70	RW74	RW78	RW79
A	0.406 ±0.031	0.875 ±0.062	1.780 ±0.062	0.560 ±0.062
B	0.094 ±0.031	0.312 ±0.031	0.375 ±0.031	0.187 ±0.031
D	0.020 ±0.0015	0.040 ±0.002	0.040 ±0.002	0.032 ±0.002

Inch	mm	Inch	mm	Inch	mm	Inch	mm
0.0015	0.04	0.032	0.81	0.187	4.75	0.560	14.22
0.002	0.05	0.040	1.02	0.312	7.92	0.875	22.23
0.020	0.51	0.062	1.57	0.375	9.53	1.750	44.45
0.031	0.79	0.094	2.39	0.406	10.31	1.780	45.21

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. These styles shall be untapped.
4. The end of the resistor body is the point where the diameter reduces to 0.06 inch.

FIGURE 1. Styles RW70, RW74, RW78, and RW79.

3.3 Power rating, maximum voltage, and critical resistance value. The power rating, maximum continuous voltage (dc or rms, ac), and critical resistance value shall be in accordance with table III. The power rating shall be based on full-load operation at an ambient temperature of 25°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.

TABLE III. Power rating, maximum voltage, and critical resistance value.

Resistor style	Power rating in watts (Characteristic U)	Maximum continuous working voltage (volts)	Critical resistance value (ohms)
RW70	1	52	2,740
RW74	5	300	17,800
RW78	10	720	51,100
RW79	3	135	6,040

3.4 Resistance. The minimum and maximum nominal resistance values shall be as specified in table IV.

TABLE IV. Minimum and maximum nominal resistance values.

Resistor style	Resistance values (ohms)	
	Minimum	Maximum
RW70	0.10	3,160
RW74		38,300
RW78		90,900
RW79		10,500

3.4.1 Standard resistance values. For standard resistance values see MIL-PRF-26.

3.5 Thermal shock. The resistors shall not change in resistance in excess of ±(0.2 percent +0.05 ohm).

3.6 Short-time overload. The resistors shall not change in resistance in excess of ±(0.2 percent +0.05 ohm).

3.7 High-temperature exposure. The resistors shall not change in resistance in excess of ±(0.5 percent +0.05 ohm).

3.8 Moisture resistance. The resistors shall not change in resistance in excess of ±(0.2 percent +0.05 ohm).

3.9 Low-temperature storage. The resistors shall not change in resistance in excess of ±(0.2 percent +0.05 ohm).

3.10 Life. The resistors shall not change in resistance in excess of ±(0.5 percent +0.05 ohm).

3.11 Solderability. Solderability is applicable to this specification.

3.12 Shock (medium impact). The resistors shall not change in resistance in excess of ±(0.1 percent +0.05 ohm).

3.13 Vibration (high frequency). The resistors shall not change in resistance in excess of ±(0.1 percent +0.05 ohm).

3.14 Terminal strength. The resistors shall not change in excess of ±(0.1 percent +0.05 ohm).

3.15 Dielectric withstanding voltage (barometric pressure, reduced, not applicable). The resistors shall not change in resistance in excess of ±(0.1 percent +0.05 ohm).

3.16 Pure tin. The use of pure tin, as an underplate or final finish is prohibited both internally and externally. Tin content of resistor components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-26.

4.2 Short-time overload. The short time overload shall be 5 times rated wattage for 5 seconds for style RW70 and RW79, and 10 times rated wattage for 5 seconds for styles RW74, and RW78; however, in no case shall the voltage exceed the values specified in table V.

TABLE V. Maximum voltages for short-time overload.

Resistor style	RW70	RW74	RW78	RW79
Voltage (volts maximum)	300	700	1,500	300

4.3 Barometric pressure (reduced). The magnitude of test voltage shall be 100 volts rms at 100,000 feet for style RW70; 300 volts rms at 100,000 feet for styles RW74 and RW78; and 200 volts rms at 100,000 feet for style RW79.

4.4 Terminal strength The applied force for style RW70 shall be 5 pounds; for styles RW74, RW78, and RW79, the applied force shall be 10 pounds.

5. PACKAGING.

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Service or Defense Agency, or within the military services system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-PRF-26 are applicable to this specification.

6.2 Acquisition requirements. Acquisition requirements are as specified in MIL-PRF-26.

a. Title, number, and date of this specification, and the complete PIN (see 1.2).
b. Unless otherwise specified (see 2.1), the versions of the individual documents referenced will be those in effect on the date of release of the solicitation.
c. Packaging instructions (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.

6.3 Derating. Resistors shall be derated, when necessary, in accordance with figure 2.

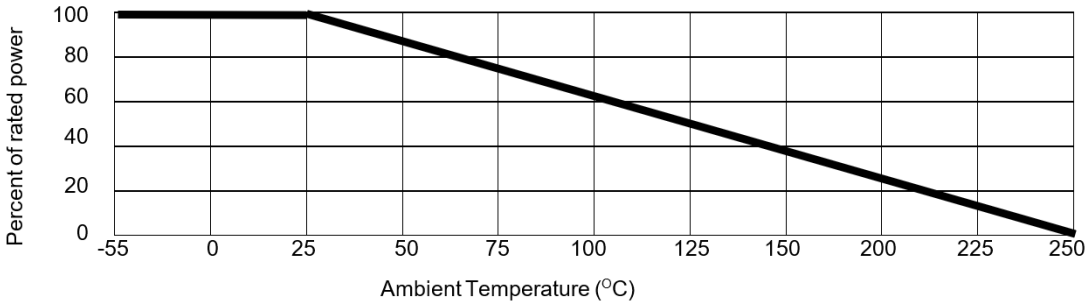


FIGURE 2. Derating curve for high ambient temperatures.

6.4 Substitution data. The resistors specified herein are not for use in new design. They are authorized for use in design contracts effective prior to or on 11 May 1973 and to support existing military equipment. Resistors of MIL-PRF-39007 are preferred for new design and can be used as substitutes for the inactivated resistors in table VI.

TABLE VI. Substitution data.

MIL-R-26/5 (style)	MIL-PRF-39007 specification sheet	Substitute style	Resistance tolerance
RW70	MIL-PRF-39007/8	RWR80	B, D, and F
RW74	MIL-PRF-39007/6	RWR74	B, D, and F
RW78	MIL-PRF-39007/7	RWR78	B, D, and F
RW79	MIL-PRF-39007/11	RWR89	B, D, and F

6.5 Tin whisker growth. The use of alloys with tin content greater than 97 percent, by mass, may exhibit tin whisker growth problems after manufacture. Tin whiskers may occur anytime from a day to years after manufacture and can develop under typical operating conditions, on products that use such materials. Conformal coatings applied over top of a whisker-prone surface will not prevent the formation of tin whiskers. Alloys of 3 percent lead, by mass, have shown to inhibit the growth of tin whiskers. For additional information on this matter, refer to ASTM-B545 (Standard Specification for Electrodeposited Coatings of Tin).

6.6 Changes from previous issues. The margins of this specification are marked with vertical lines to indicate modification generated by this revision. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5905-2022-010)

Review activities:
Army - MI
Navy - AS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:22Z
Check the source to verify that this is the current version before use.