NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/360B(IH)
17 April 2023
SUPERSEDING
MIL-DTL-11484/360A(IH)
14 June 2018

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, OUTSTANDING SERVICE, SENIOR EXECUTIVE SERVICE, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

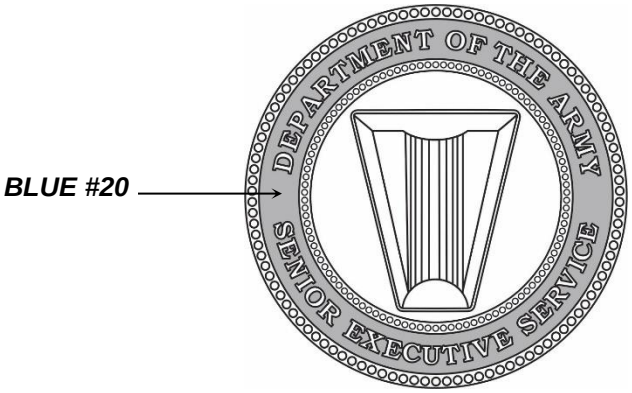

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

DIMENSIONS:
DIAMETER: 3/4 inch (REF)
THICKNESS (At rim): 0.065 inch ± 0.010 inch

FINISH: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

ATTACHING DEVICE: The attaching device shall be a prong with pick and wing type clutch. The prong shall be centered on the reverse side and either fused or hard soldered to the lapel button.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:02Z
Check the source to verify that this is the current version before use.

EPOXY:
1: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION
Blue #20	Designation Band

2: Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

ITEM CASE: Lapel buttons to be presented in a case shall be mounted and centered on a polyethylene pad and placed in a rigid hinged plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and shall be approximately 1-1/8 inches square and 5/8 inch in overall depth. The pad shall be of sufficient depth to restrict movement of the lapel button.

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. The manufacturer may deviate from MIL-DTL-11484 by using nickel underplating prior to plating with 24K gold.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issues.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review Activity:
DLA - CT

(Project No. 8455-2023-145)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:02Z
Check the source to verify that this is the current version before use.