INCH-POUND


MIL-DTL-11484/368A
16 March 2015
SUPERSEDING
MIL-DTL-11484/368
15 December 2014

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, SOLDIER FOR LIFE, RETIRED AND VETERAN, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484.

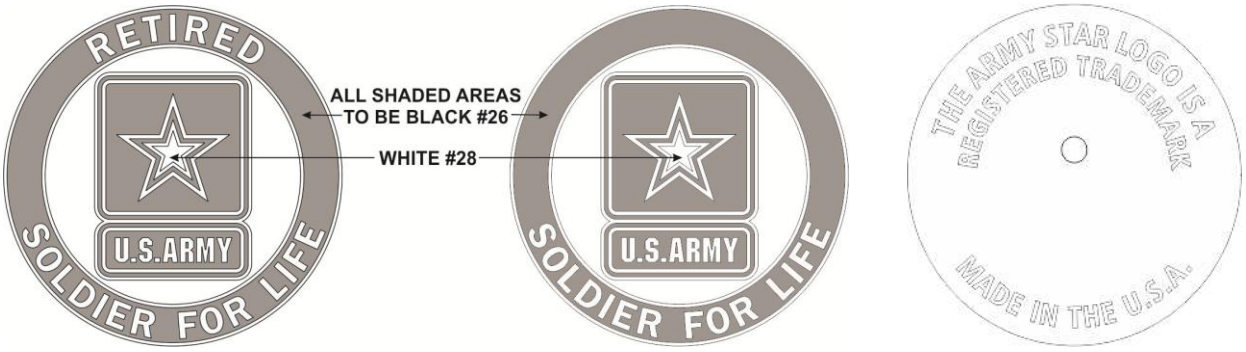

RETIRED **VETERAN** **REVERSE**

DASH NO.
-1: Lapel Button, Retired
-2: Lapel Button, Veteran

MATERIAL: (-1 and -2) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: (-1 and -2) Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match the Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

DIMENSIONS:
DIAMETER: -1, -2: 7/8 inch (REF)
THICKNESS: -1, -2: 0.074 $\pm$ .010 inch

ATTACHING DEVICE:
1. The attaching device shall be a 5/16 inch prong with pick and wing type clutch.

2. The prong will be centered on the vertical center line, 3/8 inches for the top rim on the reverse side and fused or soldered to the lapel button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:04Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Lapel Button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

COLOR	CHIP NUMBER
Black	#26
White	#28

NOTES:
1: The term (REF) refers to the measurements taken from the Government furnished hub or die.

2: The reverse side will have the following inscriptions in block capital letters 3/32 inches high. When viewed by an observer, the lettering will be raised and located along a circular arc at the top and bottom edge of the badge. The top arc will have the words "THE ARMY STAR LOGO IS A REGISTERED TRADEMARK" and the bottom arc will have the words "MADE IN THE U.S.A. The top of the lettering in the arcs will be approximately 1/16 inches in from the outer edge. No reverse die or hub will be furnished. Lettering will be cut into the reverse die.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2015-220)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:04Z
Check the source to verify that this is the current version before use.