NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/369B(IH)
24 May 2024
SUPERSEDING
MIL-DTL-11484/369A(IH)
3 December 2020

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CITIZEN SOLDIER FOR LIFE, RETIRED, U.S. ARMY NATIONAL GUARD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

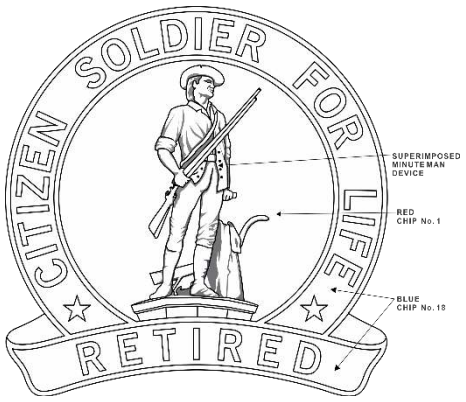

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin, 24K Gold, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
DEVICE: 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
BASE
HEIGHT: 15/16 inch (REF)
WIDTH: 15/16 inch (REF)
THICKNESS: 0.088 inch ± 0.010 inch

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:04Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT: 5/8 inch (REF)
THICKNEST: 0.062 inch ± 0.010 inch
ASSEMBLE:
THIKNESS: 0.150 inch ± 0.010 inch

ATTACHING DEVICE: Two prongs shall be located on the reverse on the vertical center line. The prongs shall be located equidistant from each end. Two prongs with wing type clutch.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	CHIP NUMBER
Red	#1
Blue	#18

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Minuteman device will be attached to the base by means of two drive pins. Drive pins shall be located on the vertical center line of the device, equidistant from each end. Pins shall be soldered on the device and swaged onto the base as an integral part of the profile. Drive pins shall not protrude or be noticeable on reverse of lapel.

3. If hard cloisonné enamel is used, the required base material will be Gilding Metal 95/5 (UNS Alloy No.C-210).

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-165)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:04Z
Check the source to verify that this is the current version before use.