INCH-POUND

MIL-S-8805/58C
16 June 1993
SUPERSEDING
MIL-S-8805/58B
30 April 1974


MILITARY SPECIFICATION SHEET

SWITCH ACTUATOR, EXTENDED PLUNGER TYPE

Inactive for new design after 30 April 1974.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805

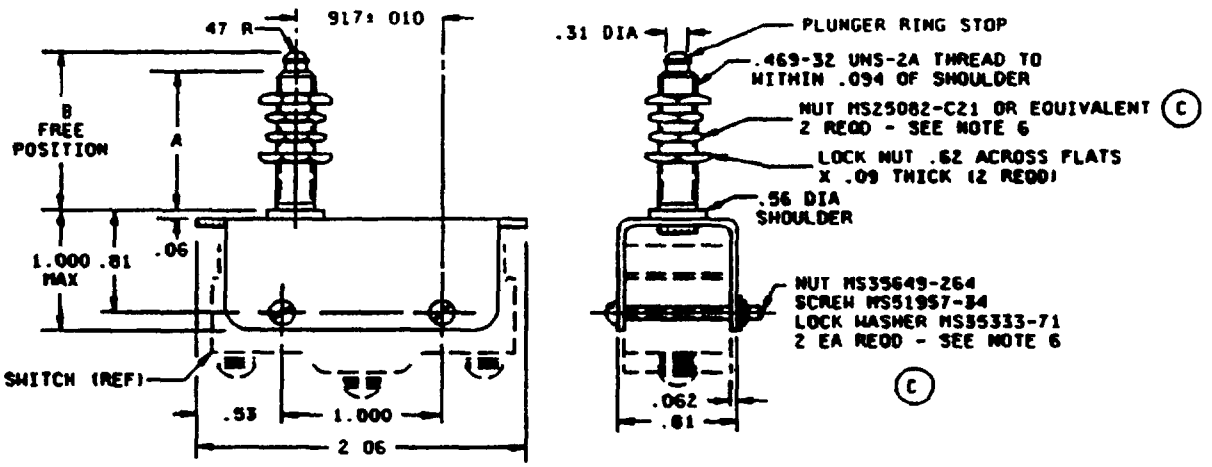

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.09	2.29	.53	13 46	1.000	25.40
.010	0.25	.094	2.39	.56	14.22	2.06	52.32
.02	0.51	.31	7.87	.62	15.75		
.06	1.52	.469	11.91	.81	20.57		
.062	1.57	.47	11.94	.917	23.29		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 for 2 place decimals and ±.005 for 3 place decimals.
4. Actuator configuration optional within the specified envelope dimensions.
5. See table I for "A" and "B" dimensions.
(C) 6. Functionally equivalent mounting hardware, as approved by the qualifying activity, may be provided.

FIGURE 1. Dimensions and configuration

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1. The switch actuator shall accommodate basic sensitive switches MS27241-1 (MIL-S-8805/30) and M8805/1-008.

Enclosure design: 1 (unsealed).

(C) Temperature characteristic: 1 (-55°C to +85°C).

(C) Shock type: M (100 g's).

Sinusoidal vibration: 10 to 55 Hz in accordance with MIL-STD-202, method 201.

Weight: 0.15 pound maximum.

Operating characteristics with switch installed:

Actuating force: 1.625 ±.625 pounds.

Pretravel: 035 inch maximum.

Overtravel: .188 inch minimum.

Full overtravel force: See table I.

Spring force: 2 pounds minimum.

Mechanical endurance: 50,000 cycles.

Qualification: The actuator shall be tested to the requirements of this specification sheet only with an MS27241-1 or M8805/1-008 switch installed.

(C) Quality conformance:

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections.

Group B inspection: Not applicable.

Part or Identifying Number (PIN): See table I.

TABLE I. PINs, dimensions, and overtravel characteristics

PIN	"A" ±.02 (0.51) 1/	"B" maximum 1/	Maximum overtravel force
			Pounds
AN3167-1	1.69 (42.93)	2 79 (70.87)	5.5
AN3168-1	1.69 (42.93)	2.16 (59.87)	4.0
AN3168-2	0.69 (17.53)	1.16 (29.47)	5.0

1/ Dimensions are in inches. Metric equivalents to the nearest .01 mm are given in parenthesis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MU
Navy - OS
Air Force - 99
DLA - ES

User activities:
Army - AR, AV, MI
Navy - AS, MC
Air Force - 19

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 5930-1549)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.