INCH-POUND
MIL-S-8805/58E
20 June 2006
SUPERSEDING
MIL-S-8805/58D
31 October 2001


MILITARY SPECIFICATION SHEET

SWITCH, ACTUATOR, EXTENDED PLUNGER TYPE

INACTIVE FOR NEW DESIGN AFTER 30 APRIL 1974

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-PRF-8805.

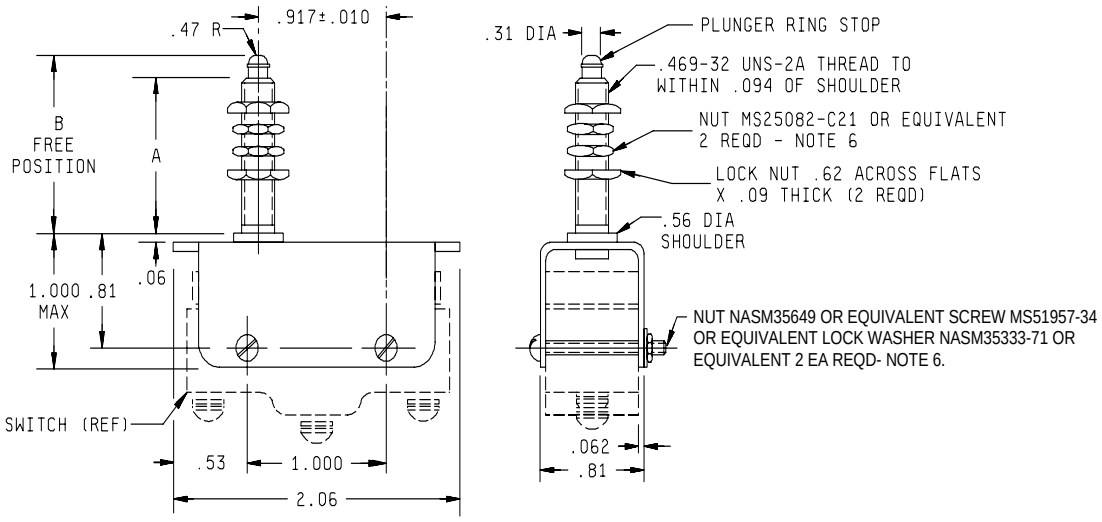

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.09	2.29	.53	13.46	1.000	25.40
.010	0.25	.094	2.39	.56	14.22	2.06	52.32
.020	0.51	.31	7.87	.62	15.75		
.060	1.52	.469	11.91	.81	20.57		
.062	1.57	.47	11.94	.917	23.29		

FIGURE 1: Dimension and configuration

AMSC N/A FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:12Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.005 inch (0.13 mm) for three place decimals.
4. Actuator configuration optional within the specified envelope dimensions.
5. See table I for “A” and “B” dimensions.
6. Functionally equivalent mounting hardware, as approved by the qualifying activity, may be provided.

FIGURE 1: Dimension and configuration - Continued

REQUIREMENTS:

Dimensions and configuration: See figure 1. The switch actuator shall accommodate basic sensitive switches M8805/1-008.

Enclosure design: 1 (unsealed).

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: M (100 g’s).

Sinusoidal vibration: 10 to 55 Hz in accordance with MIL-STD-202, method 201.

Weight: 0.15 pound maximum.

Operating characteristics:

Actuating force: 1.625 ±.625 pounds.

Pretravel: .035 inch maximum.

Overtravel: .188 inch minimum.

Full overtravel force: see table I.

Spring force: 2 pounds minimum.

Mechanical endurance: 50,000 cycles.

Qualification: The actuator shall be tested to the requirements of this specification sheet only with M8805/1-008 switch installed.

Quality conformance:

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections.

Group B inspection: Not applicable.

Part or Identifying Number (PIN): See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:12Z
Check the source to verify that this is the current version before use.

TABLE I. PINs' dimensions, and overtravel characteristics.

PIN	"A" ±.02 (0.51) 1/	"B" maximum 1/	Maximum overtravel force
			Pounds
AN3167-1	1.69 (42.93)	2.79 (70.87)	5.5
AN3168-1	1.69 (42.93)	2.16 (59.87)	4.0
AN3168-2	0.69 (17.53)	1.16 (29.47)	5.0

1/ Dimensions are in inches. Metric equivalents to the nearest .01 mm are given in parenthesis

Referenced documents. In addition to MIL-PRF-8805, this document references the following:

MS25082
MS51957
NASM35649
NASM35333
MIL-STD-202

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5930-2006-032)

Review activities:
Army – AR, AV
Navy – AS, MC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:12Z
Check the source to verify that this is the current version before use.