INCH-POUND

MIL-S-8805/59B
16 June 1995
SUPERSEDING
MIL-S-8805/59A
30 April 1974


MILITARY SPECIFICATION SHEET

SWITCH ACTUATOR, ROLLER LEAF

Inactive for new design after 30 April 1974.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

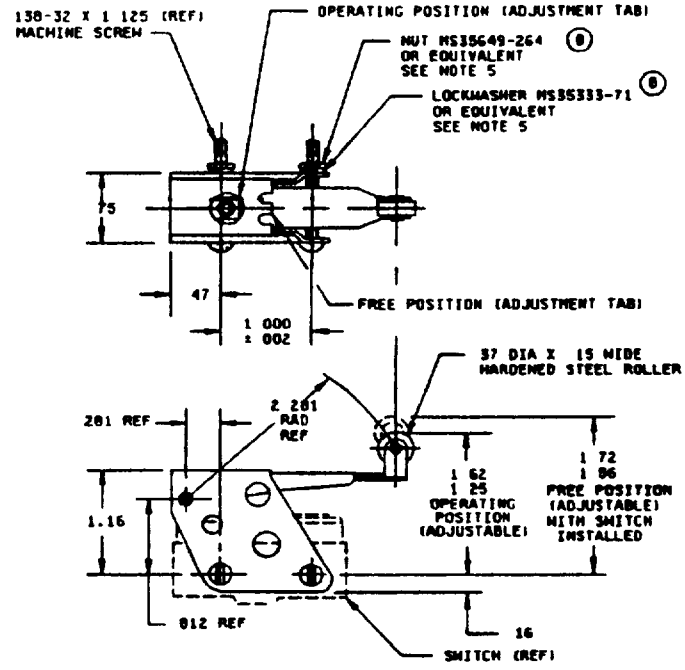

Inches	mm
.002	0.05
.020	0.51
.138	3.51
.150	3.81
.160	4.06
.281	7.14
.370	9.40
.470	11.94
.750	19.05
.812	20.62
1.000	25.40
1.125	28.58
1.16	29 46
1.25	31.75
1.56	30.62
1.62	41.15
1.72	43.69
2.281	57.94

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerance is ±.020.
4. Actuator configuration optional within the specified envelope dimensions.
5. (B) Functionally equivalent mounting hardware, as approved by the qualifying activity, may be provided.

FIGURE 1. Dimensions and configuration

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 The switch actuator shall accommodate basic sensitive switches MS27241-1 (MIL-S-8805/30) and M8805/1-008

Enclosure design: 1 (unsealed).

(B) Temperature characteristic: 1 (-55°C to +85°C).

(B) Shock type. H (100 g's)

Sinusoidal vibration: 10 to 55 Hz in accordance with MIL-STD-202, method 201.

Material: Bracket to be fabricated of steel, suitably protected to resist corrosion.

Weight 0.07 pound maximum.

Operating characteristics with switch installed

Actuating force: 12.5 ±2.5 ounces.

Pretravel .188 inch maximum

Overtravel .500 inch minimum.

Full overtravel force. 2 pounds maximum.

Spring force: 2 pounds minimum.

Salt spray. Method 101 of MIL-STD-202, test condition B (48 hours).

Mechanical endurance: 50,000 cycles.

Qualification: The actuator shall be tested to the requirements of this specification sheet only with an MS27241-1 or M8805/1-008 switch installed.

(B) Quality conformance:

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections

Group B inspection Not applicable.

Part or Identifying Number (PIN): AN3169-1.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - MU
Navy - OS
Air Force - 99
DLA - ES

User activities:
Army - AR, AV, MI
Navy - AS, MC
Air Force - 19

Preparing activity:
Navy - EC

Agent.
DLA - ES

(Project 5930-1550)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.