INCH-POUND

MIL-S-8805/59C
31 October 2001
SUPERSEDING
MIL-S-8805/59B
16 June 1993

MILITARY SPECIFICATION SHEET

SWITCH, ACTUATOR, ROLLER LEAF

Inactive for new design after 30 April 1974.

This specification forms a part of MIL-PRF-8805, dated 23 January 1998, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-8805.

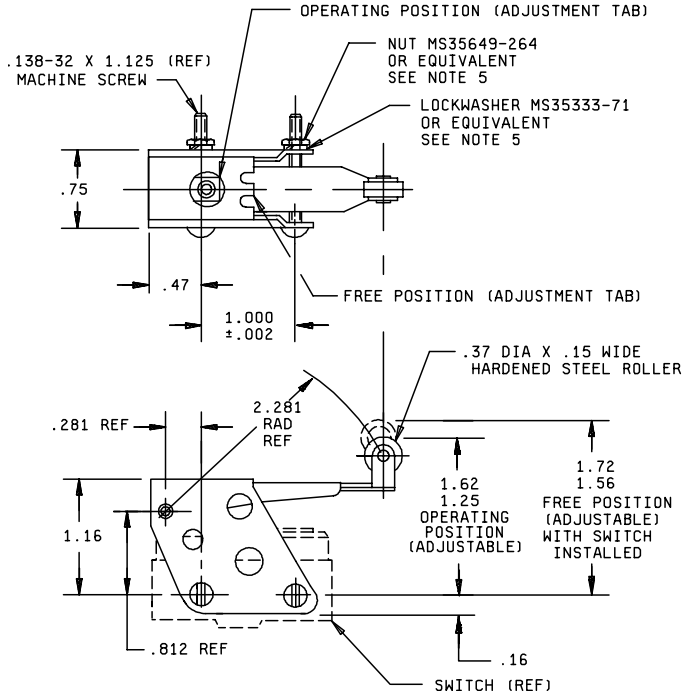


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|---|---|
| .002 | 0.05 | .150 | 3.81 | .370 | 9.40 | .812 | 20.62 | 1.16 | 29.46 | 1.62 | 41.15 |
| .020 | 0.51 | .160 | 4.06 | .470 | 11.94 | 1.000 | 25.40 | 1.25 | 31.75 | 1.72 | 43.69 |
| .138 | 3.51 | .281 | 7.14 | .750 | 19.05 | 1.125 | 28.58 | 1.56 | 39.62 | 2.281 | 57.94 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020.
4. Actuator configuration optional within the specified envelope dimensions.
5. Functionally eqivalent mounting hardware, as approved by the qualifying activity, may be provided.

FIGURE 1. Dimensions and configuration.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. The switch actuator shall accommodate basic sensitive switches MS27241-1 (MIL-PRF-8805/30) and M8805/1-008.

Enclosure design: 1 (unsealed).

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: M (100 g's).

Sinusoidal vibration: 10 to 55 Hz in accordance with MIL-STD-202, method 201.

Weight: 0.07 pound maximum.

Operating characteristics with switch installed:

Actuating force: 12.5 ±2.5 ounces.
Pretravel: .188 inch maximum.
Overtravel: .500 inch minimum.
Full overtravel force: 2 pounds maximum.
Spring force: 2 pounds minimum.

Salt spray: Method 101 of MIL-STD-202, test condition B (48 hours).

Mechanical endurance: 50,000 cycles.

Qualification: The actuator shall be tested to the requirements of this specification sheet only with an MS27241-1 or M8805/1-008 switch installed.

Quality conformance:

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections.

Group B inspection: Not applicable.

Part or Identifying Number (PIN): AN3169-1.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1126-19)

Review activities:
Army - AR, AV, MI
Navy - AS, MC
Air Force - 19



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.