INCH-POUND

MIL-S-8805/59D
20 June 2006

SUPERSEDING
MIL-S-8805/59C
31 October 2001

MILITARY SPECIFICATION SHEET

SWITCH, ACTUATOR, ROLLER LEAF

INACTIVE FOR NEW DESIGN AFTER 30 APRIL 1974

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-PRF-8805.

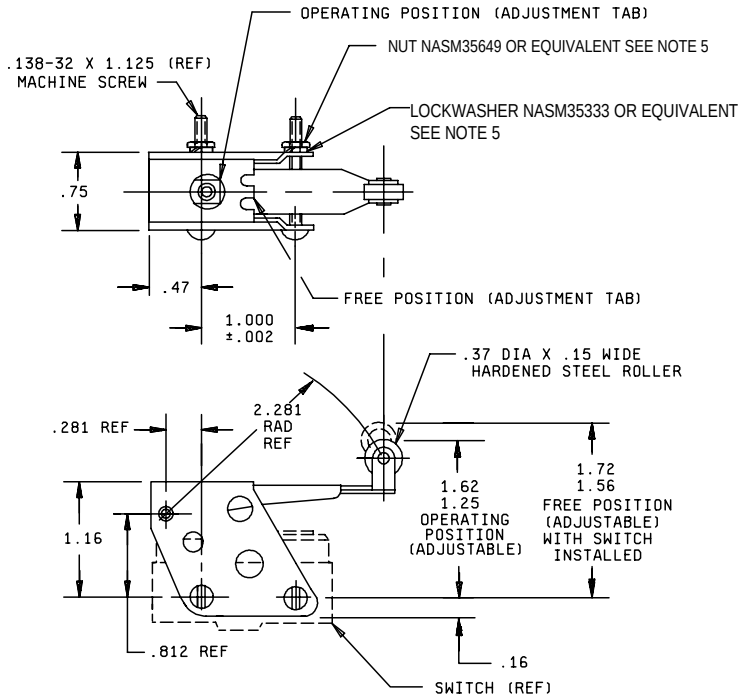

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.150	3.81	.370	9.40	.812	20.62	1.16	29.46	1.62	41.15
.020	0.51	.160	4.06	.470	11.94	1.000	25.40	1.25	31.75	1.72	43.69
.138	3.51	.281	7.14	.750	19.05	1.125	28.58	1.56	39.62	2.281	57.94

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020.
4. Actuator configuration optional within the specified envelope dimensions.
5. Functionally equivalent mounting hardware, as approved by the qualifying activity, may be provided.

FIGURE 1. Dimensions and configuration - Continued

REQUIREMENTS:

Dimensions and configuration: See figure 1. The switch actuator shall accommodate basic sensitive switches M8805/1-008.

Enclosure design: 1 (unsealed).

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: M (100 g's).

Sinusoidal vibration: 10 to 55 Hz in accordance with MIL-STD-202, method 201.

Weight: 0.07 pound maximum.

Operating characteristics with switch installed:

Actuating force: 12.5 ±2.5 ounces.
Pretravel: .188 inch maximum.
Overtravel: .500 inch minimum.
Full overtravel force: 2 pounds maximum.
Spring force: 2 pounds minimum.

Salt spray: Method 101 of MIL-STD-202, test condition B (48 hours).

Mechanical endurance: 50,000 cycles.

Qualification: The actuator shall be tested to the requirements of this specification sheet only with M8805/1-008 switch installed.

Quality conformance:

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections.

Group B inspection: Not applicable.

Part or Identifying Number (PIN): AN3169-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-8805, this document references the following:

NASM35333
NASM35649
MIL-STD-202

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity
DLA – CC
(Project 5930-2006-033)

Review activities
Army – AR, AV, MI
Navy – AS, MC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.