INCH-POUND
MIL-PRF-8805/59E
28 June 2022

SUPERSEDING
MIL-S-8805/59D
20 June 2006


PERFORMANCE SPECIFICATION SHEET

SWITCH, ACTUATOR, ROLLER LEAF

INACTIVE FOR NEW DESIGN AFTER 30 APRIL 1974

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-PRF-8805.

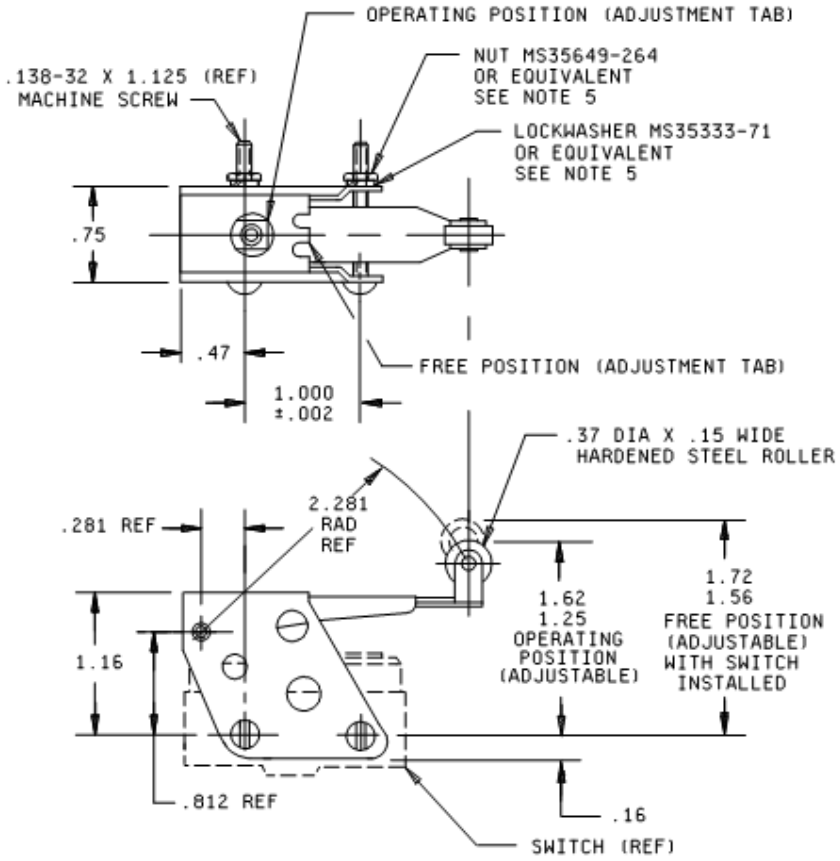

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.020.
3. Actuator configuration optional within the specified envelope dimensions.
4. Functionally equivalent mounting hardware, as approved by the qualifying activity, may be provided.
5. MS35649 per NASM35649. MS35333-71 per NASM35333.

FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. The switch actuator shall accommodate basic sensitive switches M8805/1-008.

Enclosure design: 1 (unsealed).

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: M (100 g's).

Sinusoidal vibration: 10 to 55 Hz in accordance with MIL-STD-202-201.

Weight: 0.07 pound maximum.

Operating characteristics with switch installed:

Actuating force: 12.5 ±2.5 ounces.
Pretravel: .188 inch maximum.
Overtravel: .500 inch minimum.
Full overtravel force: 2 pounds maximum.
Spring force: 2 pounds minimum.

Salt spray: MIL-STD-202-101, test condition B (48 hours).

Mechanical endurance: 50,000 cycles.

Qualification: The actuator shall be tested to the requirements of this specification sheet only with M8805/1-008 switch installed.

Quality conformance:

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections.

Group B inspection: Not applicable.

Part or Identifying Number (PIN): AN3169-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-8805, this document references the following:
MIL-STD-202-101 MIL-STD-202-201 NASM35649 NASM35333

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Preparing activity
DLA – CC

(Project 5930-2022-057)

Review activities
Army – AR, AV, MI
Navy – AS, MC
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.