INCH-POUND

MIL-S-8805/65B
[illegible]
SUPERSEDING
MIL-S-8805/65A
2[illegible] March 1969

# MILITARY SPECIFICATION SHEET

# SWITCH, SENSITIVE, DPDT, PLUNGER, 5 AMPERES, RESILIENT SEAL

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specifications listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-8805

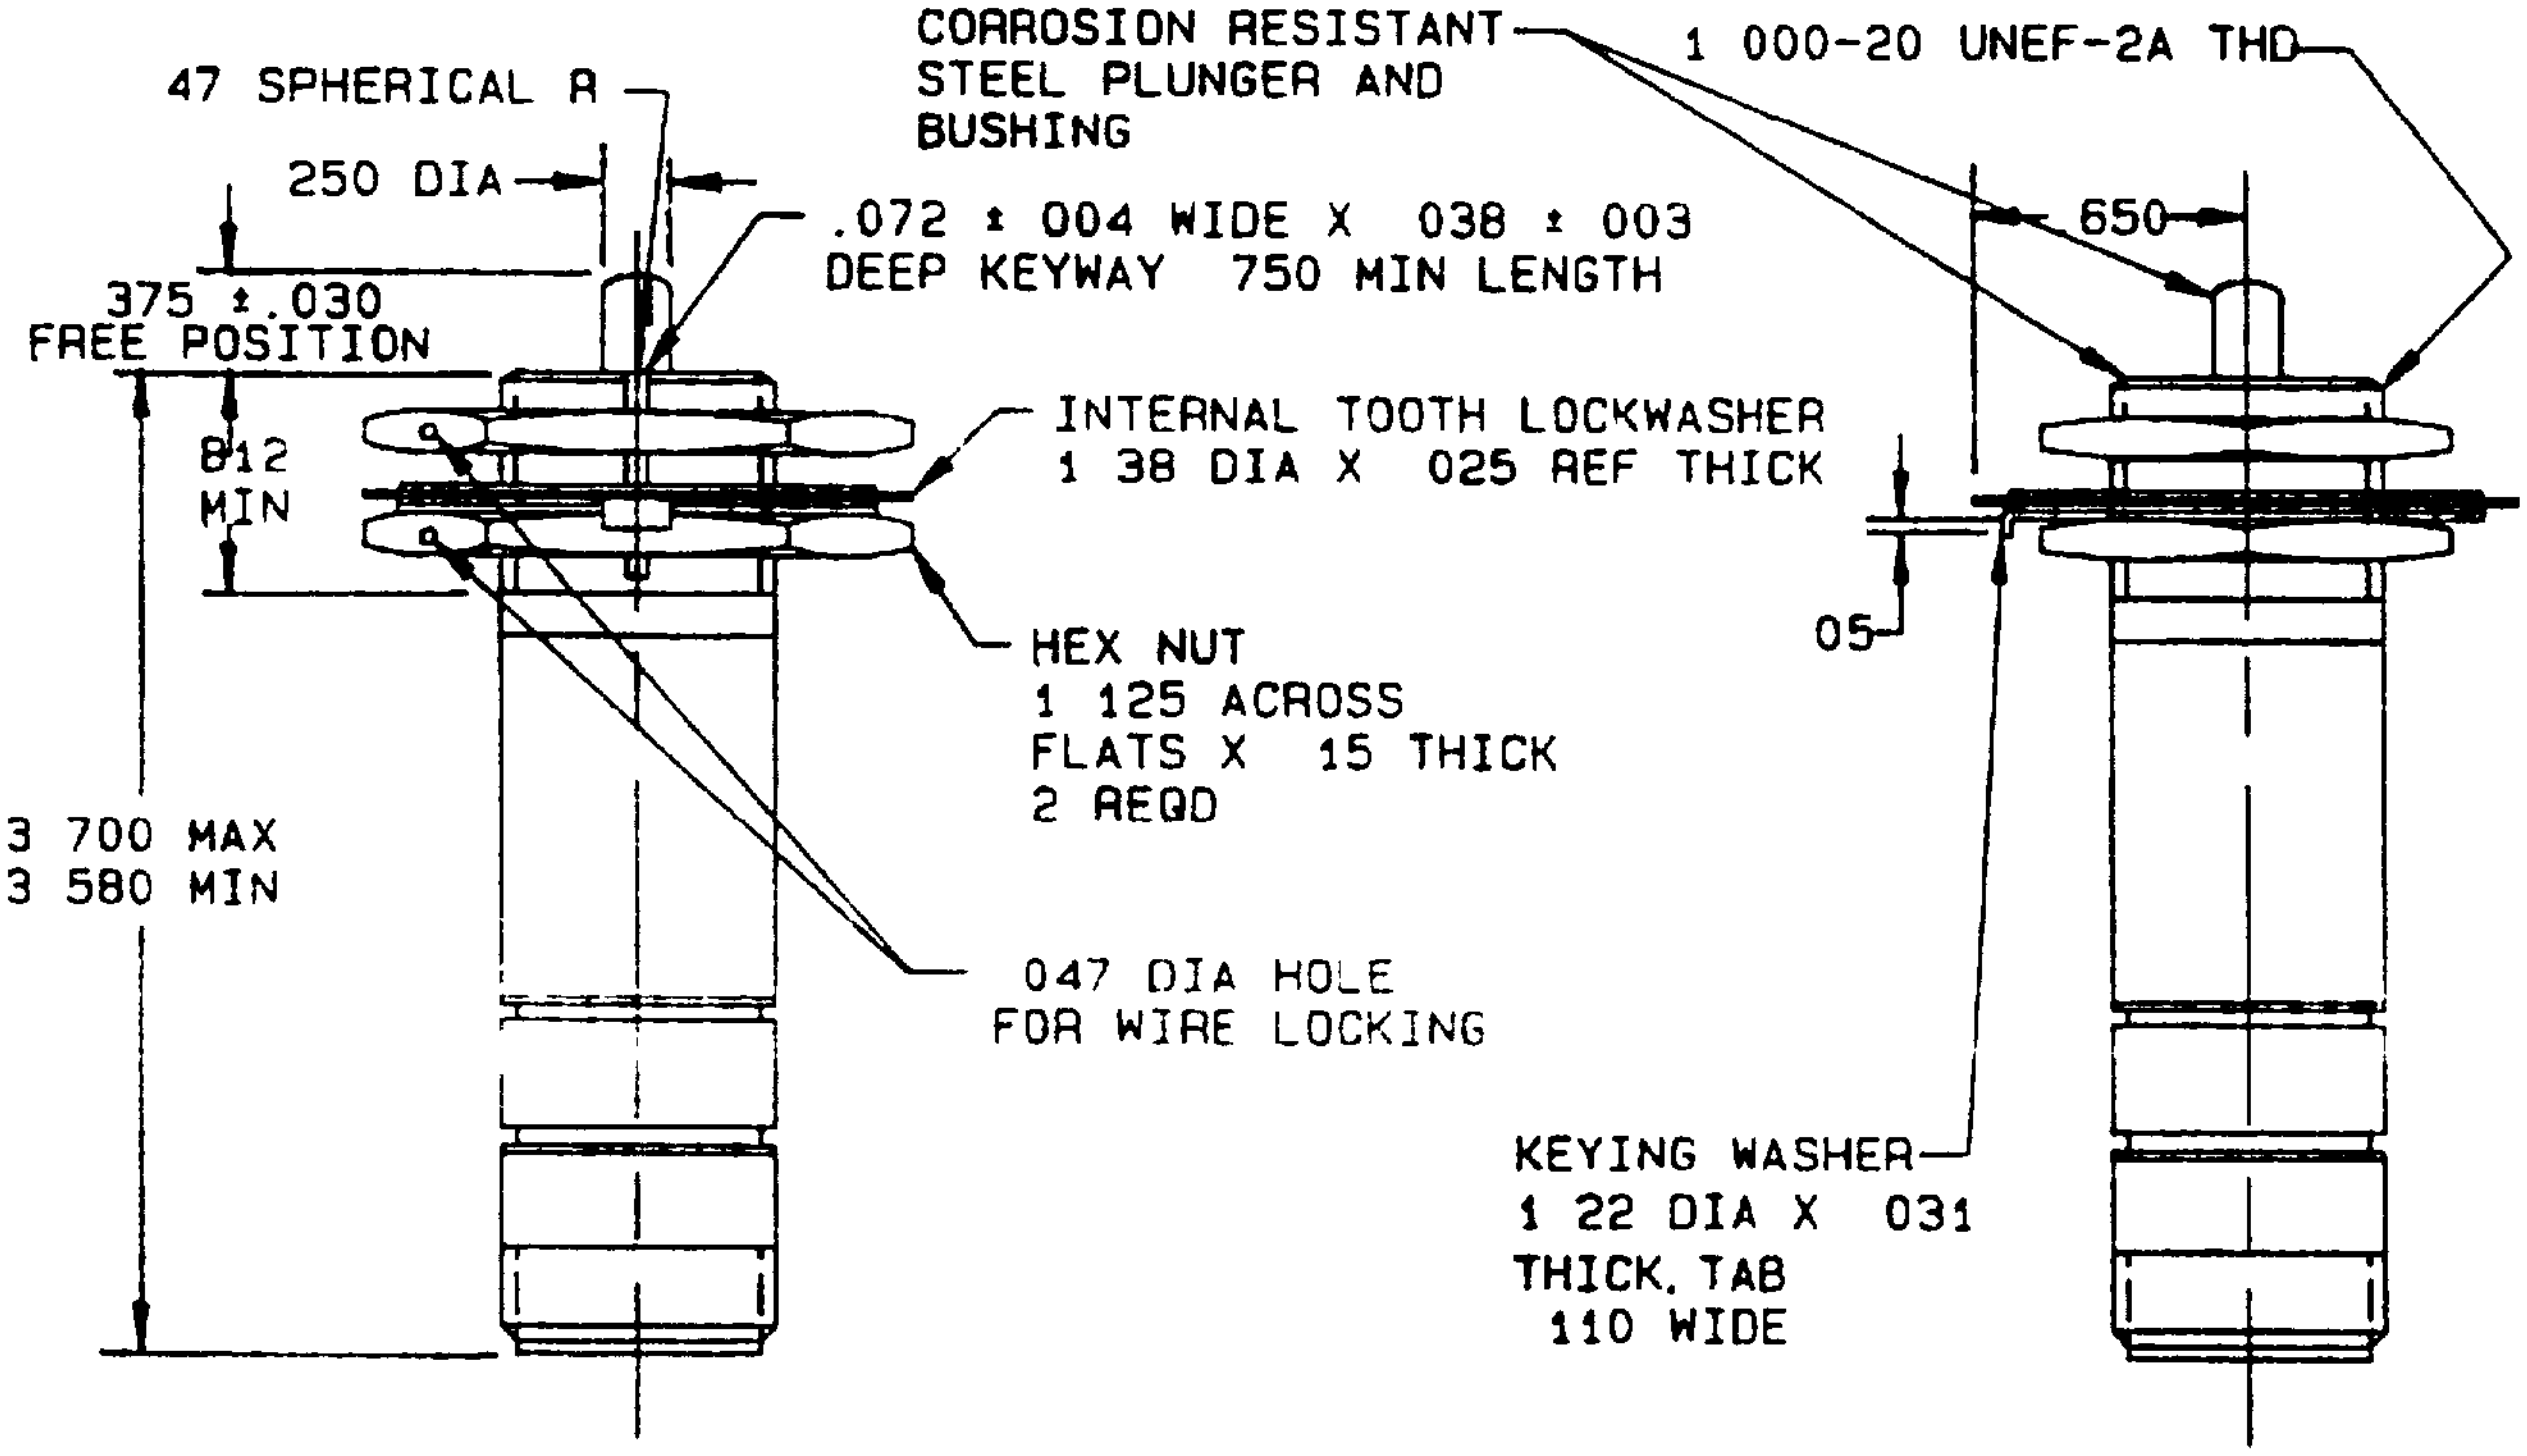

FIGURE 1 Dimensions and configurations

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

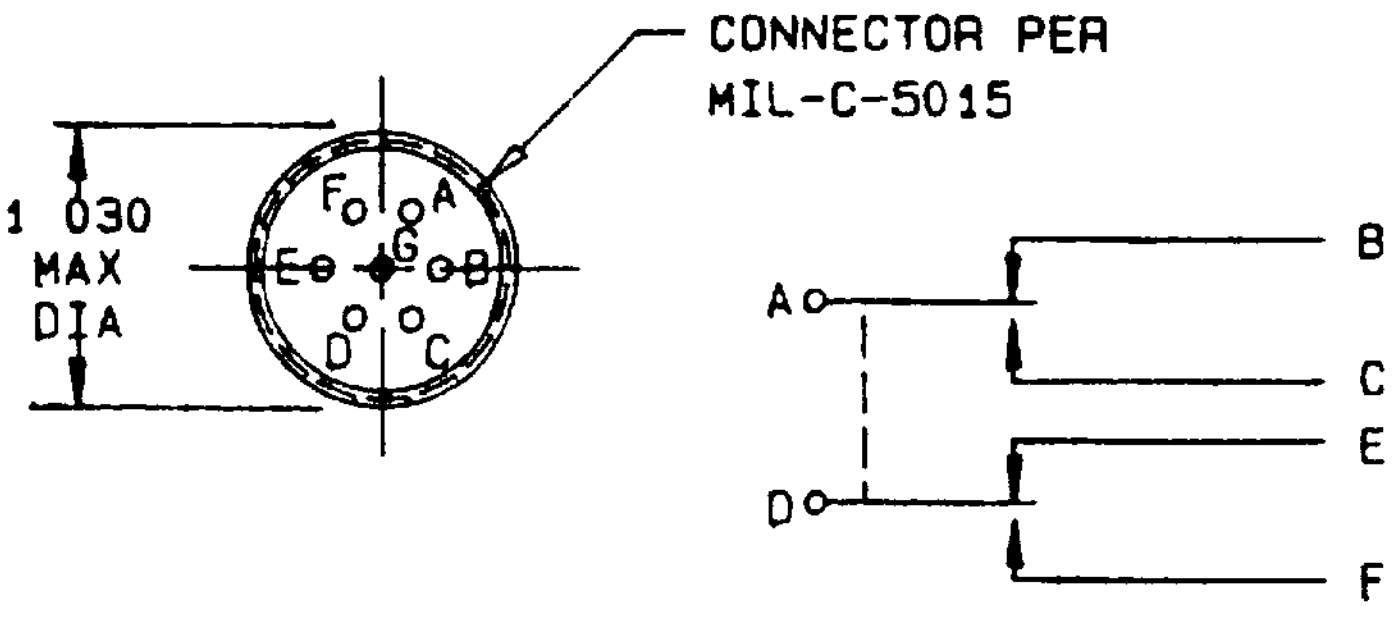

CIRCUIT SCHEMATIC

| Inches | mm | Inches | mm |
|---|---|---|---|
| .003 | 0.08 | .375 | 9.53 |
| .004 | 0.10 | .470 | 11.94 |
| .025 | 0.64 | .650 | 16.51 |
| .030 | 0.76 | .750 | 19.05 |
| .031 | 0.79 | .812 | 20.62 |
| .038 | 0.97 | 1.030 | 26.16 |
| .047 | 1.19 | 1.125 | 28.58 |
| .050 | 1.27 | 1.220 | 30.99 |
| .072 | 1.83 | 1.380 | 35.05 |
| .110 | 2.79 | 3.580 | 90.93 |
| .150 | 3.81 | 3.700 | 93.98 |
| .250 | 6.35 | | |

NOTES

1. Dimensions are in inches
2. Metric equivalents are given for information only
3. Unless otherwise specified, tolerances are ± .02 (0.51 mm) for 2 place decimals and ± .005 (0.13 mm) for 3 place decimals
4. Switch configuration optional provided dimensions specified are not exceeded

FIGURE 1. Dimensions and configurations - Continued

REQUIREMENTS

Dimensions and configuration   See figure 1

Enclosure design   4 Resilient)   All entrances to the switch cavity except through the actuator bushing shall be sealed by fusion of glass to metal, metal to metal, or ceramic to metal

Temperature characteristic   1(-55°C to +85°C)

Shock type   H (High-impact)   There shall be no opening of closed contacts in excess of 8 milliseconds

Vibration grade   2(10 to 2,000 Hz)

Weight   0 60 pound maximum

Operating characteristics

Actuating force   6 to 12 pounds
Pretravel   0.040 inch maximum
Movement differential   0 020 inch maximum
Overtravel   0.250 inch minimum

Material   MIL-M-14, type CFG, may be used internally

Finish   Switch housing shall be processed to resist corrosion

Contact resistance   0 5 ohms maximum measured with a 5 ampere test current and a 28 V dc test voltage

Dielectric withstanding voltage   Sea level (1,000 V rms)

Seal test   Only watertight test shall be performed in group A

Mechanical endurance   25,000 cycles

Electrical endurance   25,000 cycles

Electrical ratings   See table I

Marking   The circuit schematic shall be permanently and legibly marked on the switch case

Part or Identifying Number (PIN)   M8805/65-001

TABLE I   Electrical ratings

| Load | Sea level 28 V dc |
|---|---|
| | amperes |
| Resistive - - - - - - - | 5 |
| Inductive - - - - - - - | 3 |
| Motor - - - - - - - - - | 4 |

Revision letters are not used to denote changes due to the extensiveness of the changes

CONCLUDING MATERIAL

Custodians
  Army - ER
  Navy - EC
  Air Force - 85

Review activities
  Army - MI
  Navy - AS, SH
  Air Force - 99
  DLA - ES

User activities
  Navy - MC
  Air Force - 19

Preparing activity
  Navy - EC

Agent
  DLA - ES

(Project 5930-1468)