NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND
MIL-PRF-8805/70H
12 May 1995
SUPERSEDING
MIL-S-8805/70G
27 December 1991

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, DPDT AND 4PDT, PLUNGER OR ROLLER,
7 AMPERES AND 4 AMPERES, HERMETICALLY SEALED CONTACTS, RESILIENT SEALED PLUNGER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.


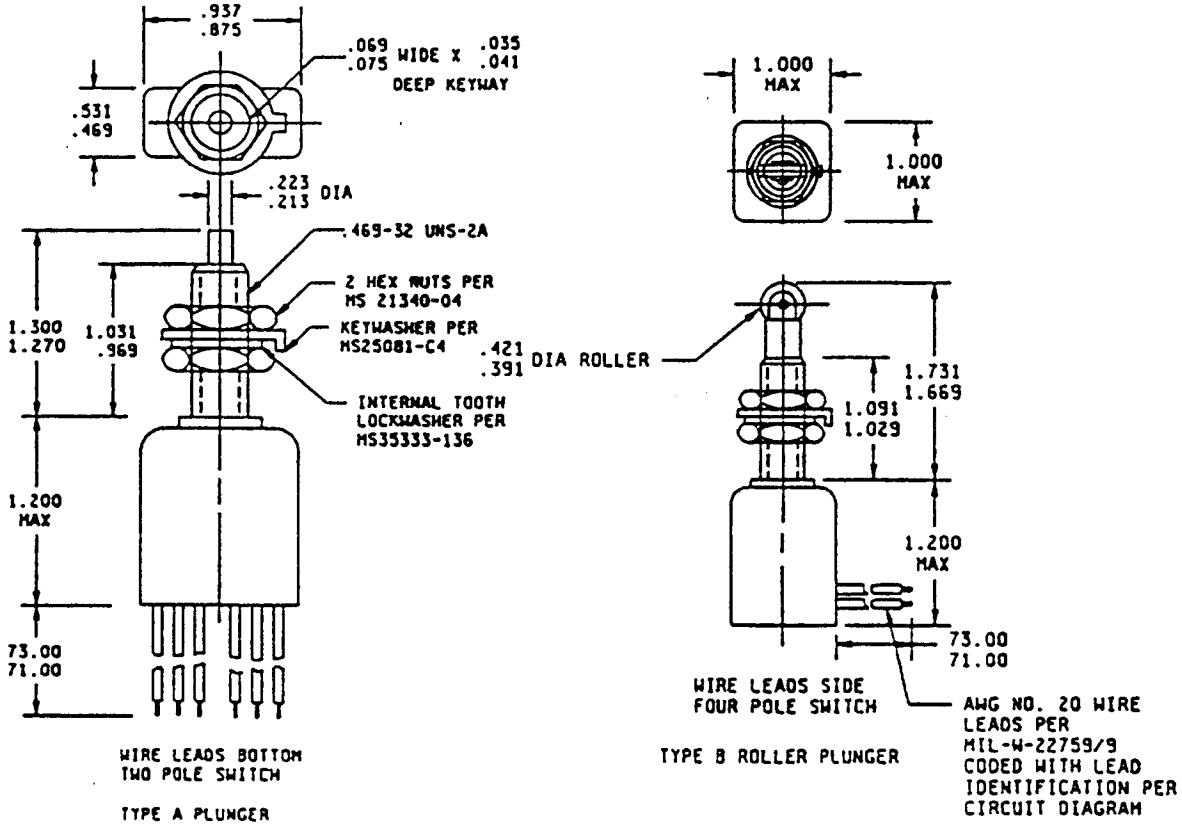


FIGURE 1. Dimensions and configurations.


Ⓗ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:14Z
Check the source to verify that this is the current version before use.

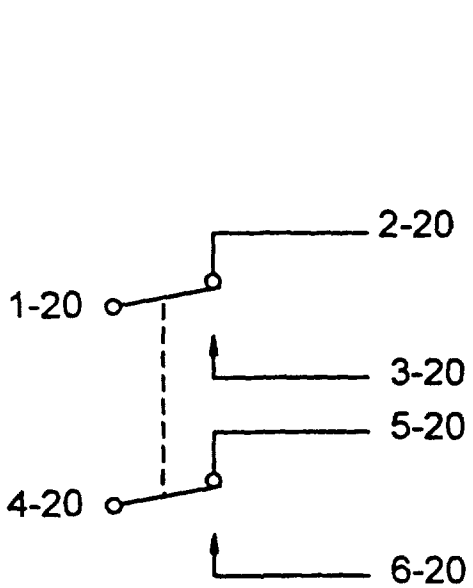

CIRCUIT DIAGRAM 1

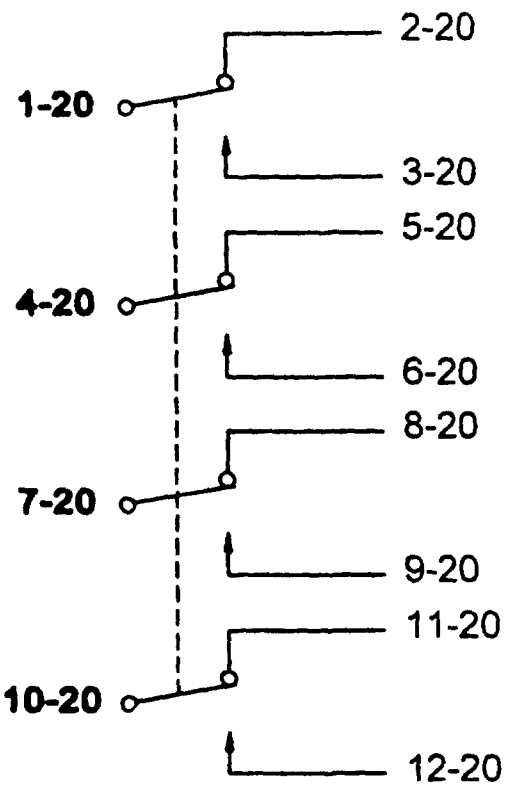

CIRCUIT DIAGRAM 2

inches	mm	inches	mm	inches	mm	inches	mm
.035	0.89	.391	9.93	1.000	25.40	1.669	42.39
.041	1.04	.421	10.69	1.029	26.14	1.731	43.97
.047	1.19	.469	11.91	1.031	26.19	71.00	1803.4
.069	1.75	.531	13.49	1.091	27.71	73.00	1854.2
.075	1.91	.875	22.23	1.200	30.48		
.213	5.41	.937	23.80	1.270	32.26		
.223	5.66	.969	24.61	1.300	33.02		

NOTES:
1 Dimensions are in inches.
2 Metric equivalents are given for general information only.

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations. See figure 1.

(H) Enclosure design: 5 (hermetic). Basic switch shall be hermetically sealed M8805/68-008 or -022 listed on QPL-8805. Resilient plunger seal.

Temperature characteristic: 2 (-65°C to +125°C).

Shock type: M (100 G, method 213, test condition I, MIL-STD-202).

Vibration grade: 3 (10 to 3,000 Hz swept sinusoidal)

Weight:

Two pole switch: 1.6 ounce plus .10 ounce per lead per foot.

Four pole switch: 3.4 ounce plus .10 ounce per lead per foot.

Operating characteristics:

Actuating force: 10 pounds maximum.

Releasing force: 1 pound minimum.

Movement differential: .020 inch (0.51 mm) maximum.

Pretravel: .030 inch (0.76 mm) maximum.

Overtravel: .200 inch (5.08 mm) minimum.

Contact resistance: .04 ohm +0.011 ohm per lead per foot.

Dielectric withstanding voltage:

Sea level and 70,000 feet: 1,050 V rms (terminal to case), 800 V rms (terminal to terminal)

Seal test: Not required.

Mechanical endurance: 50,000 cycles.

Electrical endurance: 25,000 cycles

Intermediate current: 25,000 cycles.

Low level circuit: 25,000 cycles.

Electrical ratings: See table I.

Short circuit: 20 times rated resistive load (MS3320-7 1/2 used for circuit protection).

Qualification:
Group submission: See table II.

Military Part or Identifying Number (PIN): See tables III and IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:14Z
Check the source to verify that this is the current version before use.

(H) TABLE I Electrical ratings.

Load	Sea Level and 70,000 Ft. 28 Vdc	
Resistive	7	4
Inductive	1	1
Lamp	2	2

(H) TABLE II. Qualification.

Inspection	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805, groups I through IV inclusive (seal test not required)	M8805/70-030, -038 (all sample units) (030 will qualify the 038 because of amp rating, but not the reverse)	M8805/70-025 through -028 and -029, -031, through -037, -039, -040 (2 sample units each): Visual and mechanical inspection only	All

(H) TABLE III PIN's and configuration.

PIN 1/ M8805/70-	Resistive load rating	Circuit diagram	Type of actuating mechanism	Terminals
025	7 Amp	1	A	Wire leads-bottom
026	7 Amp	1	B	Wire leads-bottom
027	7 Amp	1	A	Wire leads-side
028	7 Amp	1	B	Wire leads-side
029	7 Amp	2	A	Wire leads-bottom
030	7 Amp	2	B	Wire leads-bottom
031	7 Amp	2	A	Wire leads-side
032	7 Amp	2	B	Wire leads-side
033	4 Amp	1	A	Wire leads-bottom
034	4 Amp	1	B	Wire leads-bottom
035	4 Amp	1	A	Wire leads-side
036	4 Amp	1	B	Wire leads-side
037	4 Amp	2	A	Wire leads-bottom
038	4 Amp	2	B	Wire leads-bottom
039	4 Amp	2	A	Wire leads-side
040	4 Amp	2	B	Wire leads-side

(H) 1/ PIN's M8805/70-001 through -024 have been canceled.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:14Z
Check the source to verify that this is the current version before use.

(H) TABLE V Substitution information for canceled PIN's. 1/

Canceled PIN M8805/70-	Substitute 7 Amp PIN M8805/70-	Substitute 4 Amp PIN M8805/70-
015	025	033
016	026	034
017	027	035
018	028	036
021	029	037
022	030	038
023	031	039
024	032	040

1/ The canceled PIN's are no longer acquirable. The substitute parts are interchangeable in all respects except electrical ratings. The canceled parts were rated at sea level and 70,000 feet altitude as follows:

28 V dc: 7 A resistive, 3 A inductive, 2 A lamp load.
115 V ac, 400 Hz: 5 A resistive, 3 A inductive, 2 A lamp load.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA-ES

(Project 5930-1594-02)

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:14Z
Check the source to verify that this is the current version before use.