NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-8805/73H
12 May 1995
SUPERSEDING
MIL-S-8805/73G
27 December 1991


PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, PLUNGER, 7 AMPERES AND 4 AMPERES, HERMETICALLY SEALED CONTACTS, RESILIENT SEALED PLUNGER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

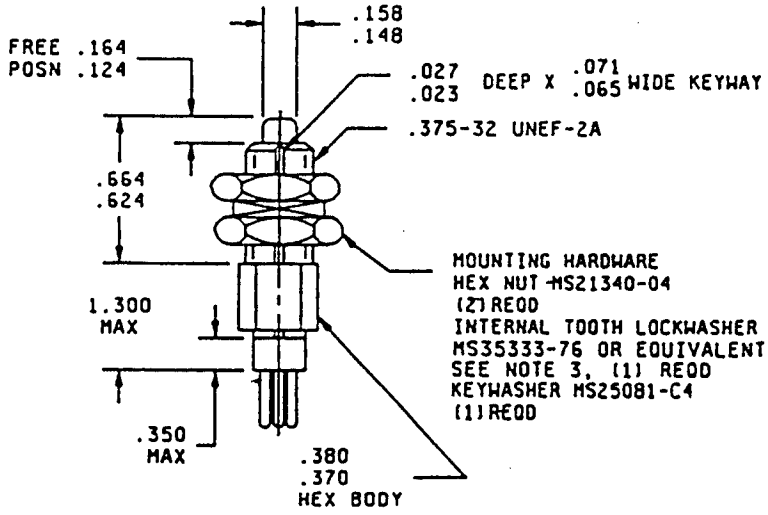

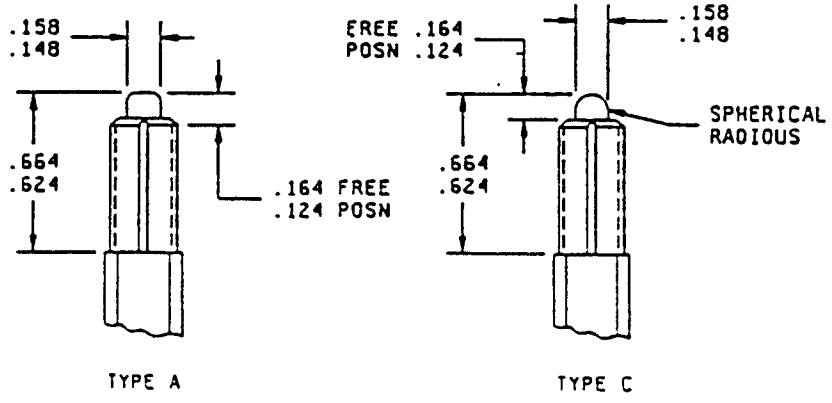


Ⓗ FIGURE 1. Dimensions and configurations.

Ⓗ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:15Z
Check the source to verify that this is the current version before use.

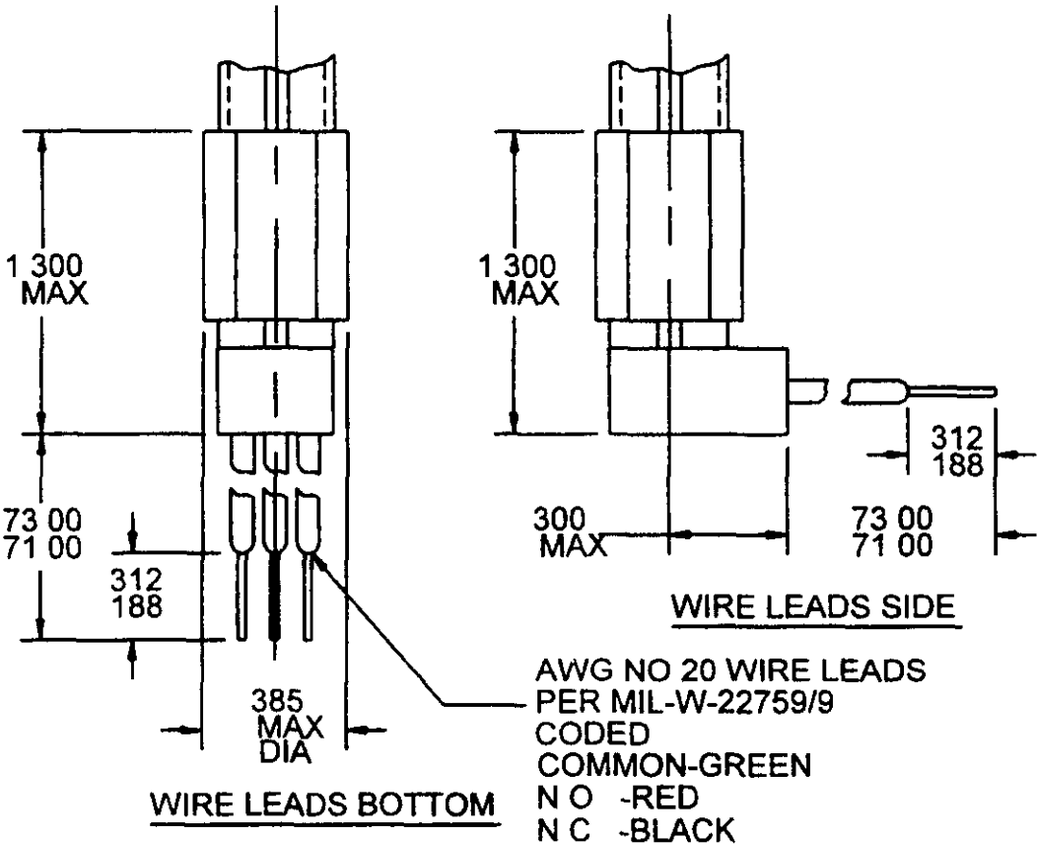

inches	mm	inches	mm	inches	mm	inches	mm
023	0 58	148	3 76	370	9 40	664	16 87
027	0 69	158	4 01	380	9 65	1 100	27 94
032	0 81	164	4 17	385	9 78	71 00	1803 4
047	1 19	188	4 78	390	9 91	73 00	1854 2
065	1 65	300	7 62	480	12 19		
071	1 80	312	7 92	520	13 21		
124	3 15	350	8 89	624	15 85		

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
(H) 3 Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for lock washer Dimensions shall be in accordance with the referenced hardware specification

FIGURE 1 Dimensions and configurations Continued

Source: https://assist.dla.mil -- Downloaded: 20260-17T11:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations See figure 1

(H) Enclosure design 5 (hermetic) Basic switch shall be hermetically sealed, M8805/68 008 or 022 listed on QPL 8805 Resilient plunger seal

Temperature characteristic 2 (-65°C to +125°C)

Shock type M (100 G, method 213, test condition I, MIL STD 202)

Vibration grade 3 (10 to 3,000 Hz swept sinusoidal)

Operating characteristics

  Actuating force 6 5 pounds maximum

  Releasing force 1 5 pounds minimum

  Pretravel 020 inch (0 51 mm) maximum

  Movement differential 005 inch (0 13 mm) maximum

  Overtravel 125 inch (3 18 mm) minimum

Contact resistance 040 ohm plus 0 011 ohm per lead per foot

Dielectric withstanding voltage

  Sea level and 70,000 feet 1,050 V rms (terminal to case), 800 V rms (terminal to terminal)

Seal test Not required

Mechanical endurance 50,000 cycles

Electrical endurance 25,000 cycles

Intermediate current 25,000 cycles

Low level circuit 25,000 cycles

Electrical ratings See table I

Short circuit 20 times rated resistive load (MS3320 7 1/2 used for circuit protection)

Weight 1 0 ounce plus 0 1 ounce per lead per foot

Qualification

  Group submission See table II

Military Part or Identifying Number (PIN) See tables III and IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:15Z
Check the source to verify that this is the current version before use.

(H) TABLE I Electrical ratings

LOAD	Sea level and 70,000 Ft 28 Vdc	
Resistive	7 Amps	4 Amps
Inductive	1 Amp	1 Amp
Lamp	2 Amps	2 Amps

(H) TABLE II Qualification

Inspection	Basic Switch	Additional Inspection	Extent of approval
Qualification inspection table of MIL S-8805 groups I through VI inclusive (seal test not required)	M8805/73-009, -013 (all sample units) (009 will qualify the 013 because of amp rating but not the reverse)	M8805/73-010 through 012, 014 through 016 (2 sample units each) Visual and mechanical inspection only	All

(H) TABLE III PIN s and configuration

PIN 1/	Load Rating	Type of actuating mechanism	Terminals
M8805/73-009	7 Amps	A	Wire leads-bottom
M8805/73 010	7 Amps	A	Wire leads-side
M8805/73-011	7 Amps	C	Wire leads-bottom
M8805/73-012	7 Amps	C	Wire leads side
M8805/73 013	4 Amps	A	Wire leads-bottom
M8805/73 014	4 Amps	A	Wire leads-side
M8805/73 015	4 Amps	C	Wire leads-bottom
M8805/73 016	4 Amps	C	Wire leads-side

1/ PIN s M8805/73-001 through 008 have been canceled

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:15Z
Check the source to verify that this is the current version before use.

(H) TABLE IV Substitution information for canceled PIN's 1/

Canceled PIN's M8805/73-	Substitute PIN's (7 Amps) M8805/73-	Substitute PIN's (4 Amps) M8805/73-
003	009	013
005	010	014
007	011	015
008	012	016

1/ The canceled PIN's are no longer acquirable The substitute parts are interchangeable in all respects except electrical ratings The canceled parts were rated at sea level and 70,000 feet altitude as follows

28 V dc 7 A resistive, 3 A inductive, 2 A lamp load
115 V ac, 400 Hz 5 A resistive, 3 A inductive, 2 A lamp load

CONCLUDING MATERIAL

Custodians
Army - ER
Navy EC
Air Force - 85

Review activities
Army - AR, AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity
DLA - ES

(Project 5930-1594 04)

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:15Z
Check the source to verify that this is the current version before use.