MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE, 2 CIRCUIT (AMPERES) OR SPST (8 AMPERES), UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-8805



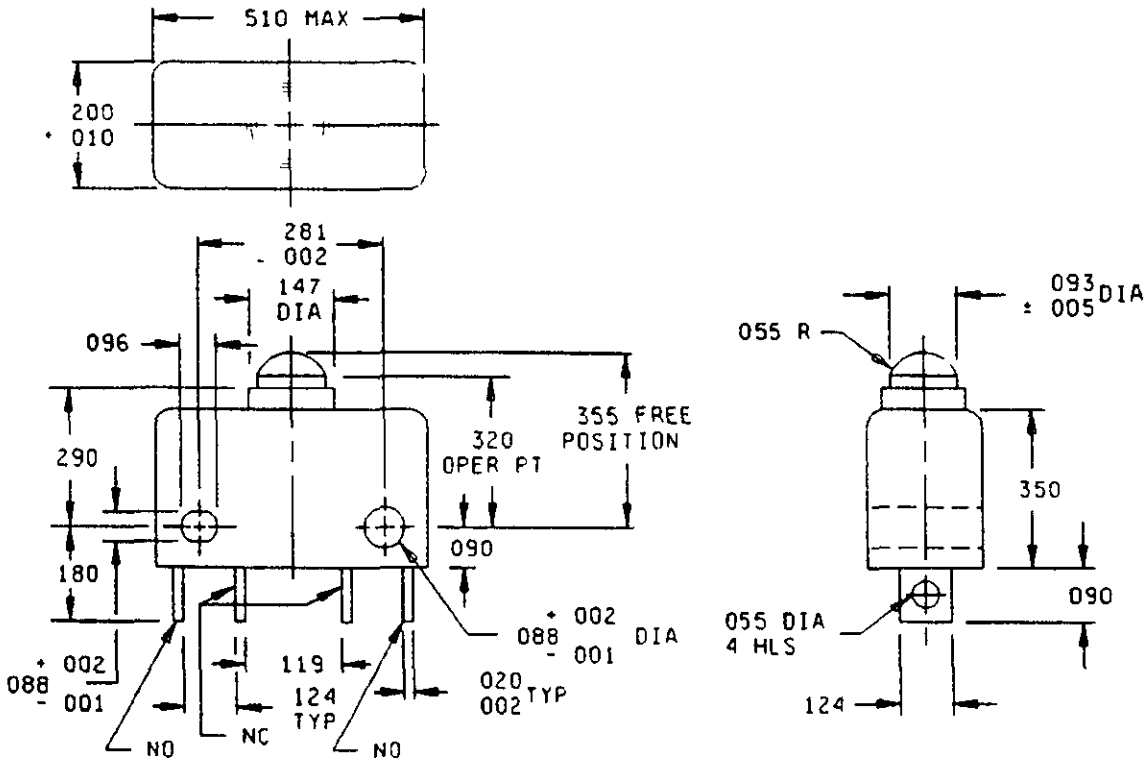


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:15Z
Check the source to verify that this is the current version before use.

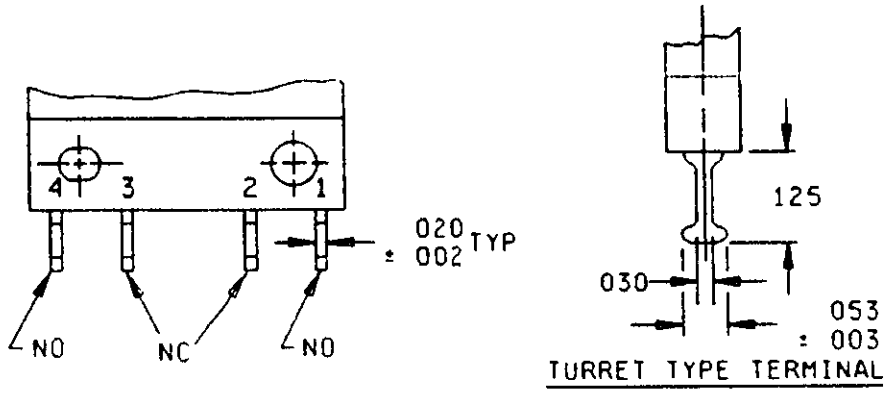

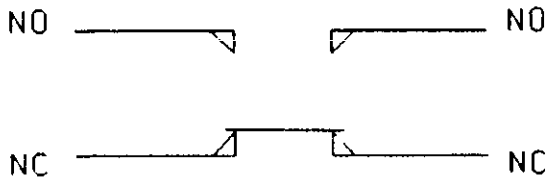

CIRCUIT SCHEMATIC

2 CIRCUIT

Inches	mm	Inches	mm
001	0 03	096	2 44
002	0 05	119	3 02
003	0 08	124	3 15
005	0 13	125	3 18
010	0 25	147	3 73
020	0 51	200	5 08
030	0 76	281	7 14
053	1 35	320	8 13
055	1 40	350	9 02
088	2 24	355	9 03
090	2 29	510	12 9
093	2 36		

1 In

1 Dimension are in inch
2 Metric equivalents are given for general information only
3 Unless otherwise specified tolerance is ± 015 (0 38 mm

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations See figure 1

Enclosure design 1 (unsealed)

Temperature characteristic 2 (-65°C to +125°C)

Shock type M (100 g, test condition I, method 213 of MIL-STD-202)

Vibration grade 2 (10 to 2,000 Hz)

Weight 003 pound maximum

Operating characteristics

Free position - - - - - - 355 ± 015 inch (see figure 1)

Actuating force - - - - - 8 ounces maximum
Overtravel- - - - - - - - 004 inch minimum
Movement differential - - 010 inch minimum
(±20 percent variation from specified values acceptable after test)

Operating point - - - - - 320 ± 015 inch (see figure 1)

Strength of actuator 10 pounds

Terminal strength 5 pounds, all directions

Material

Base, excluding button and cover Flame resistant diallyl phthalate in accordance with MIL-M-14, type SDG-F

(F) Terminals Terminal finish may be 000030 inch minimum to 000100 inch maximum thick gold plate When construction of the terminals is integral with the contacts and the gold plate exceeds 000050 inch thickness, no diffusion barrier is required

Dielectric withstanding voltage

Sea level 1,000 V rms initial

1,000 V rms between all terminals and mounting plate after endurance test

Altitude 70,000 feet - 400 V rms

Mechanical endurance 100,000 cycles

Electrical endurance 50,000 cycles

Electrical ratings See table I

Part or Identifying Number (PIN) See table II

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:15Z
Check the source to verify that this is the current version before use.

TABLE I Electrical ratings

Load	Sea level, 28 V dc		70,000 feet, 28 V dc	
	SPST (NO or NC)	2 circuit	SPST (NO or NC)	2 circuit
	Amperes	Amperes	Amperes	Amperes
Resistive	8	5	8	5
Inductive	5	3	3	2
Motor	5	---	---	---
Lamp	1	---	---	---

TABLE II PIN and terminal configurations

PIN	Terminal configuration
MS27257-1	Spade type
MS27257-2	Turret type

QUALIFICATION

Group submission See table III

TABLE III Group submission

PIN	Examination or test	Extent of approval
MS27257-1	Qualification inspection table of MIL-S-8805	All
MS27257-2 (2 sample units)	Visual and mechanical examination Terminal strength Dielectric withstanding voltage Operating characteristics	

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AV, MI
Navy - AS, OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - AR
Navy - MC
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1522)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:15Z
Check the source to verify that this is the current version before use.