
MILITARY SPECIFICATION SHEET

SWITCHES, SENSITIVE, MOMENTARY, 4 CIRCUIT OR DPDT (10 AMPERES), UNSEALED

This specification is aporoved for use by all Departments and Agencies of the Deparment of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

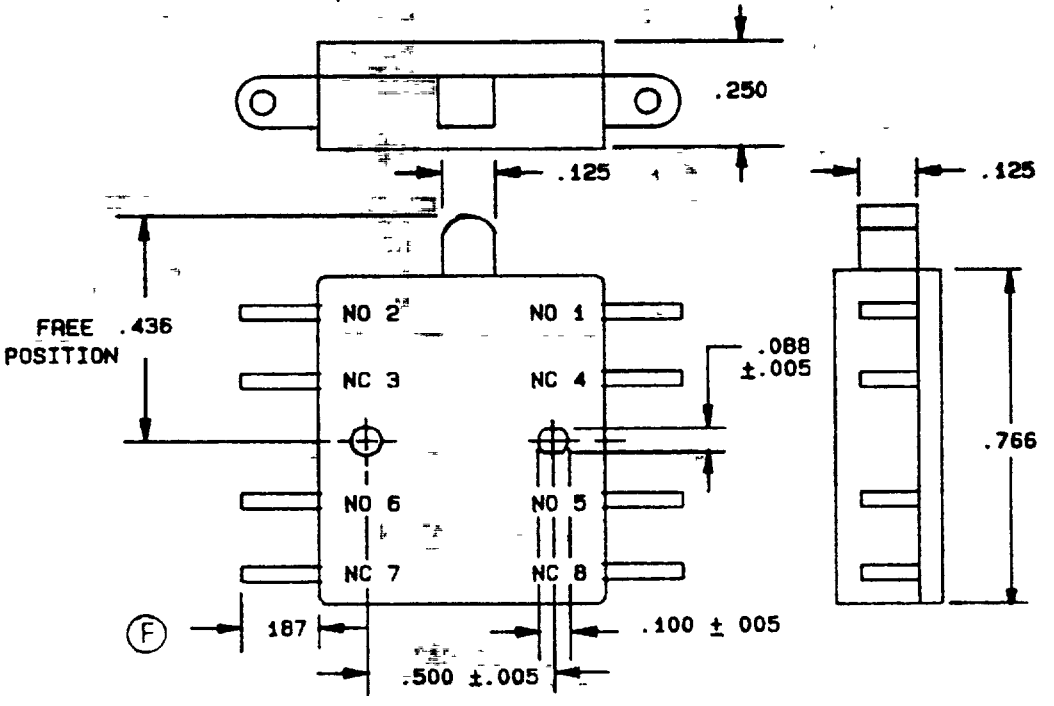

Ⓕ TERMINAL CONFIGURATION A

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.080	2.03	.250	6.35	.500	12.70
.002	0.05	.088	2.24	.396	10.06	.766	19.46
.005	0.13	.125	3.18	.436	11.07	.781	19.84
.010	0.25	.187	4.75				


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).

FIGURE 1. Dimensions and configurations.

Ⓕ denotes changes.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:16Z
Check the source to verify that this is the currenversion before use.

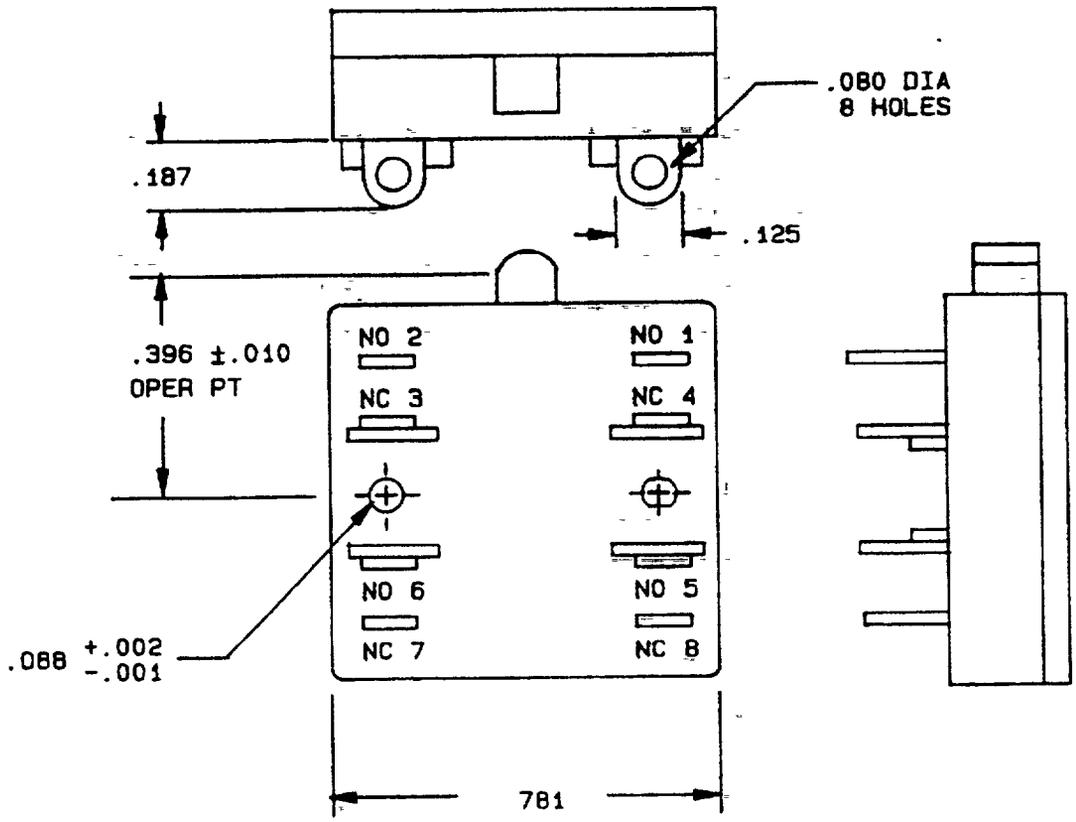

Ⓕ TERMINAL CONFIGURATION B

TERMINAL CONFIGURATION B

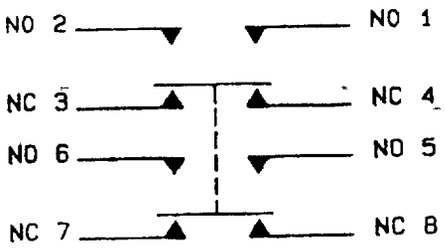

CIRCUIT SCHEMATIC
4 CIRCUIT (DPDT)

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:16Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configurations. See figure 1.

Enclosure design. 1 (unsealed).

Temperature characteristic 2 (-65°C to +125°C).

Shock type M (100 g, test condition I, method 213 of MIL-STD-202).

Vibration grade. 2 (10 to 2,000 Hz swept sinusoidal, 15 g peak).

Weight. .25 ounce maximum.

Operating characteristics.

Free position	.436 inch.	±20 percent variation from specified values acceptable after test.
Actuating force	1.5 pounds maximum.	
Overtravel	.012 inch minimum.	
Movement differential	.025 ±.010 inch.	
Operating point	.396 ±.010 inch.	

Strength of actuator. 25 pounds.

Terminal strength: 5 pounds when applied perpendicular to the longitudinal axis of the terminals; 9 pounds when applied in other directions.

Material.

Case and cover. Type SDG-F in accordance with MIL-M-14.

Button: Type SDG-F in accordance with MIL-M-14 or type GPT-30F in accordance with MIL-M-24519.

Dielectric withstanding voltage.

Sea level. 1,000 V rms initial.
1,000 V rms between all terminals and mounting plate after endurance test.
Altitude 70,000 feet - 400 V rms.

Mechanical endurance. 100,000 cycles at .016 ±.001 inch overtravel.

Electrical endurance. 50,000 cycles.

Electrical ratings: See table I.

Part or Identifying Number (PIN). See table II.

TABLE I. Electrical ratings.

	Sea level				70,000 feet	
	28 V dc DPDT	28 V dc 4 circuit	115 V ac, 60 Hz DPDT	115 V ac, 60 Hz 4 circuit	28 V dc DPDT	28 V dc 4 circuit
	Amperes	Amperes	Amperes	Amperes	Amperes	Amperes
Resistive	10	10	7.5	5	10	10
Inductive	7.5	5	5	5	3.5	2
Lamp	4	3	3	1.5	---	---

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:16Z
Check the source to verify that this is the currenversion before use.

QUALIFICATION:

Group submission: See table III.

TABLE II. PIN and terminal configurations.

PIN	Terminal configuration
M8805/77-001 M8805/77-002	A (end solder type) B (side solder type)

TABLE III. Group submission.

PIN	Examination or test	Extent of approval
M8805/77-001 (all sample units)	Qualification inspection table of MIL-S-8805	All
M8805/77-002 (3 sample units)	Terminal strength Thermal shock Operating characteristics Visual and mechanical examination	

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - AV
Navy - AS, OS, SH
Air Force - 99

User activities.
Army - AR
Navy - MC
Air Force - 19
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1461)

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:16Z
Check the source to verify that this is the current version before use.