INCH-POUND

MIL-S-8805/57C
16 June 1993
SUPERSEDING
MIL-S-8805/57B
30 June 1970


MILITARY SPECIFICATION SHEET

SWITCH ACTUATOR, PLUNGER TYPE

Inactive for new design after 30 June 1970.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

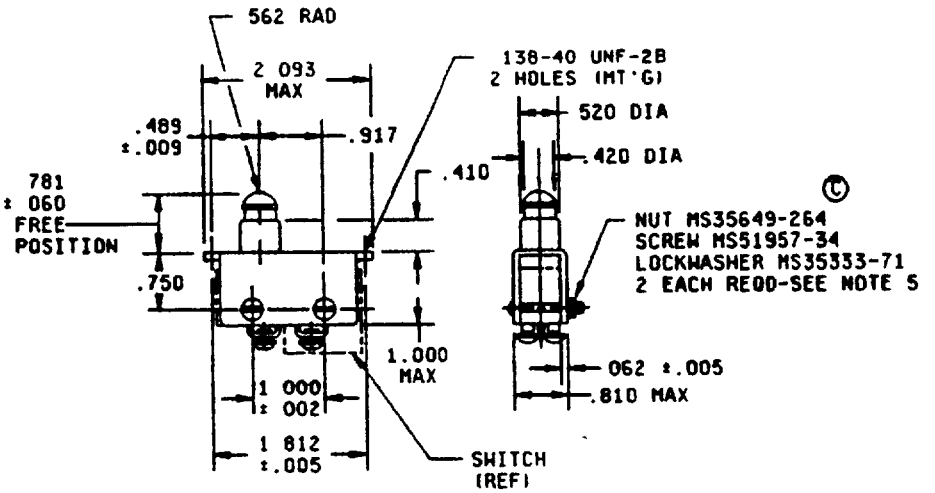

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.062	1.57	.562	14.27	1.000	25.40
.005	0.13	.410	10.41	.750	19.05	1.812	46.02
.009	0.23	.420	10.67	.781	19.84	2.093	53.16
.020	0.51	.489	12.42	.810	20.57		
.060	1.52	.520	13.22	.917	23.29		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 020.
4. Actuator configuration optional within the specified envelope dimensions.
5. (C) Functionally equivalent mounting hardware, as approved by the qualifying activity, may be provided

FIGURE 1. Dimensions and configuration

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:12Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 The switch actuator shall accommodate basic sensitive switches MS27241-1 (MIL-S-8805/30) and M8805/1-008

Enclosure design: 1 (unsealed).

(C) Temperature characteristic. 1 (-55°C to +85°C).

(C) Shock type. M (100 g's)

Sinusoidal vibration. 10 to 55 Hz in accordance with MIL-STD-202, method 201.

Weight 0.06 pound maximum.

Operating characteristics with switch installed:

Actuating force 2.75 ±1.25 pounds

Pretravel 125 inch maximum

Overtravel 125 inch minimum

Full overtravel force 6 pounds maximum

Spring force 2 pounds minimum

Mechanical endurance: 50,000 cycles.

Qualification. The actuator shall be tested to the requirements of this specification sheet only with an MS27241-1 or M8805/1-008 switch installed.

(C) Quality conformance.

Group A inspection: The materials and physical dimension requirements may be verified through in-process controls and inspections.

Group B inspection Not applicable.

Part or Identifying Number (PIN): AN3166-1

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - AS, OS, SH
Air Force - 99
DLA - ES

User activities.
Army - MI
Navy - MC
Air Force - 19

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 5930-1548)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:12Z
Check the source to verify that this is the current version before use.