
MILITARY SPECIFICATION SHEET

SWITCH, SENSITIVE, SPDT, MOMENTARY, DUSTTIGHT


INACTIVE FOR NEW DESIGN AFTER 30 JUNE 1970

This specification is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-8805

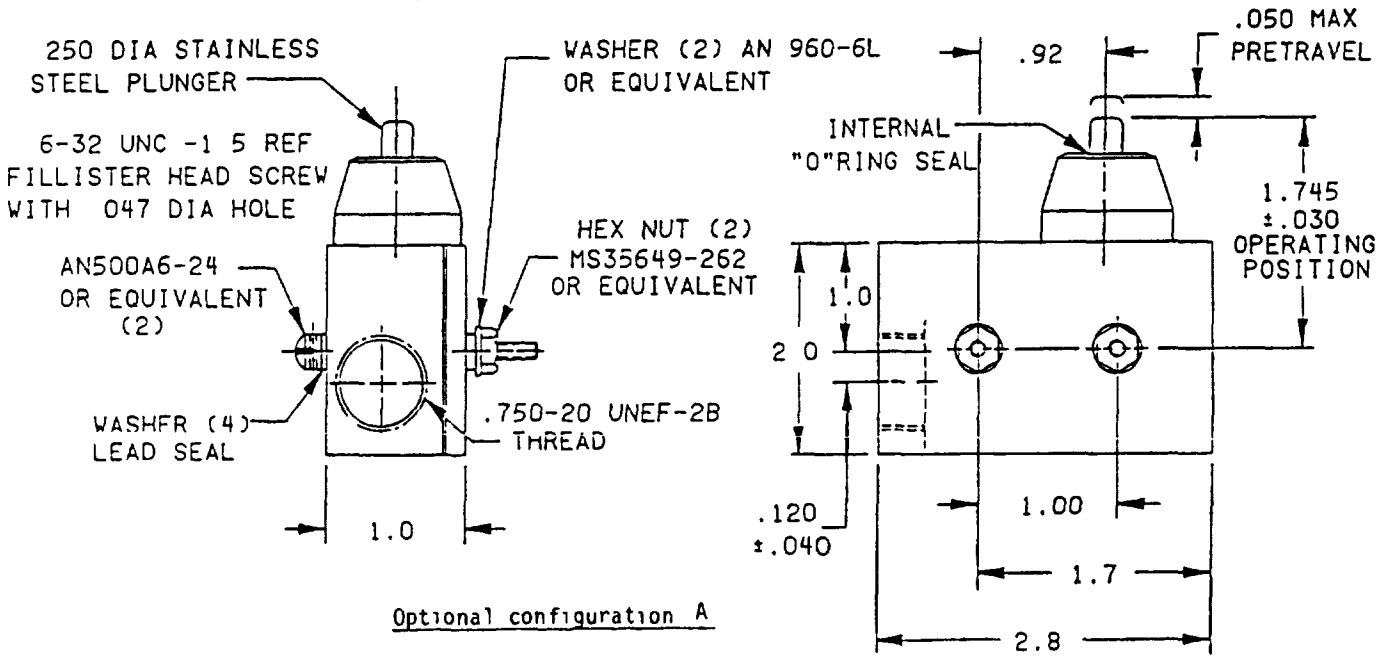

Optional configuration A



CIRCUIT DIAGRAM


Inches	mm
005	0 13
015	0.38
.030	0.76
040	1.02
047	1.19
.050	1 27
.120	3 05
.250	6 35
750	19 05
.92	23 37
1 0	25 4
1.7	43 18
1.745	44 32
2.0	50 8
2 8	71 12

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is + 03 on one place decimals, ± 015 on two place decimals, and 005 on three place decimals
3. Exact shape of switch optional within envelope dimensions shown
4. Metric equivalents are given for general information only


FIGURE 1. Dimensions and configurations

(C) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

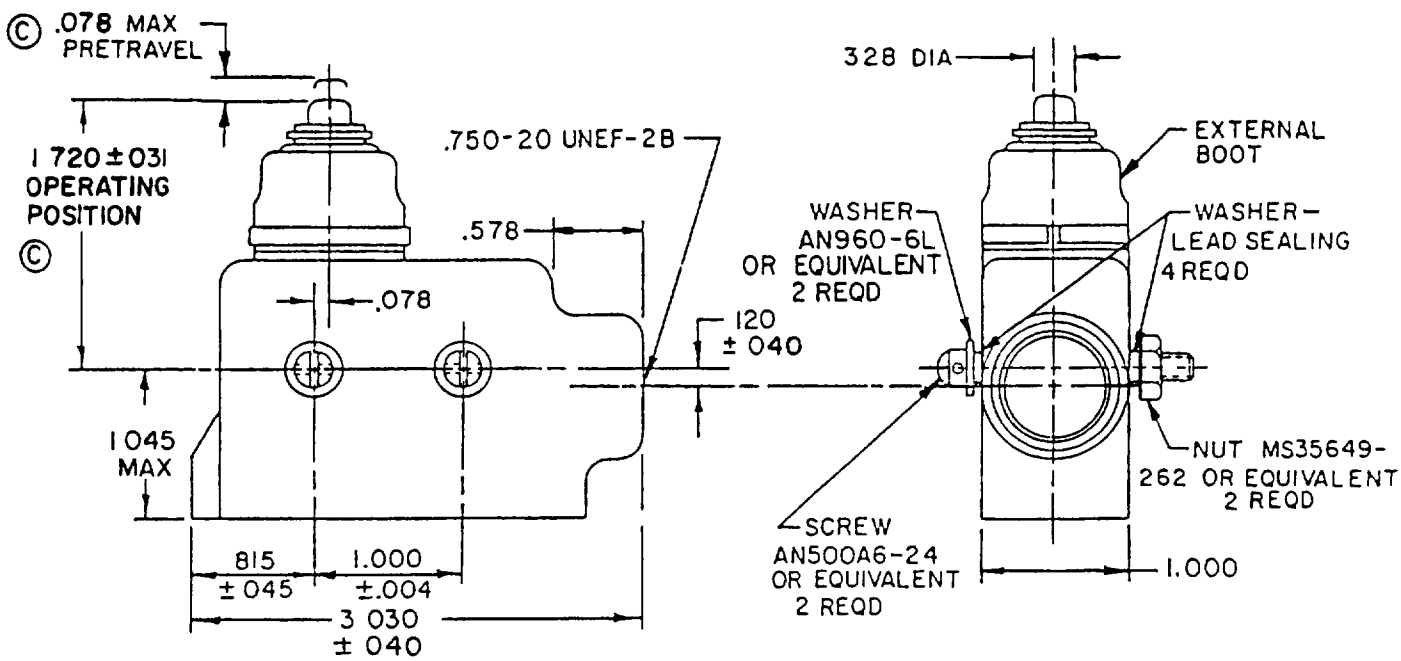

Optional configuration B

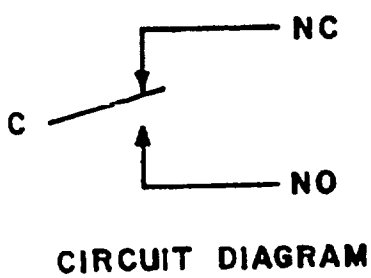

CIRCUIT DIAGRAM

Inches	mm	Inches	mm
.004	0.10	750	19 05
.031	0 79	812	20 62
040	1.02	815	20 70
045	1 14	1.000	25.4
078	1 98	1 031	26 19
120	3 05	1 045	30.30
.125	3.18	1.720	43 69
.328	8.33	3.016	76 24
469	11.91		

NOTES
1. Dimensions are in inches
2 Unless otherwise specified, tolerance is ±.031.
3. Exact shape of switch optional provided dimensions specified are not exceeded.
4. Gaskets shall be furnished for side or bottom plates
5 Metric equivalents are given for general information only

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(C) Dimensions and configurations: See figure 1 (two optional configurations). Assembly shall include MIL-S-8805/1 basic switch with screw terminals and .070 inch (1.78 mm) nominal contact separation. Basic switch may be category II with variation in size of threaded mounting bushing. Normally closed terminal may be recessed to facilitate wiring through the conduit.

Enclosure design: 2 (dusttight).

Temperature characteristic: 1 (-55°C to +85°C).

(C) Shock type: M (100 g); contacts not monitored in free position.

(C) Vibration grade: 1 (10 to 500 Hz swept sinusoidal, 10 g peak); contacts not monitored in free position.

Weight: .56 pound maximum.

Operating characteristics:

Actuating force: 28 ounces minimum, 54 ounces maximum.

Overtravel force: 10 pounds maximum.

Pretravel: See figure 1.

Overtravel .218 inch (5.54 mm) minimum.

Strength of actuating means: 25 pounds.

Finish: Housing and mounting hardware shall be processed to resist corrosion.

Contact resistance: Not applicable.

Dielectric withstanding voltage:

Sea level: 1,000 volts rms.

Altitude: 400 volts rms at 50,000 feet.

Mechanical endurance: 50,000 cycles.

Electrical endurance 25,000 cycles.

Temperature rise. +65°C.

Electrical ratings See table I.

Qualification inspection See table II.

Quality assurance:

Group B. Not applicable.

TABLE I. Electrical ratings. 1/

Load	Sea level and 50,000 feet	
	28 V dc	115 V ac - 60 Hz
	amperes	amperes
Resistive	2	15
Inductive	1	15

1/ See MIL-S-8805/1 for additional application information on .070 inch nominal contact separation switches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

Part number: M8805/62-1. (Part numbers AN3217-1 and AN3217-2 have been canceled. See table III for substitution information.)

© TABLE II. Qualification inspection.

Inspection	Number of sample units
Group I	
Visual and mechanical inspection 1/ Dielectric withstanding voltage Insulation resistance Operating characteristics	All sample units
Group II	
Strength of actuating means 2/ Thermal shock Swept sinusoidal vibration Shock Moisture resistance Marking visibility Dielectric withstanding voltage Operating characteristics	4 units
Group III	
Salt spray Dielectric withstanding voltage Insulation resistance Marking visibility Operating characteristics	2 units
Group IV	
Low temperature operation 2/ Mechanical endurance at low temperature 2/ 3/ Mechanical endurance at high temperature 2/ Dielectric withstanding voltage Operating characteristics	4 units
Group V	
Mechanical endurance at room ambient temperature Operating characteristics Seal (dusttight)	2 units

1/ Only two sample units shall be inspected for physical dimensions.
2/ Two sample units.
© 3/ Same sample units as for low temperature operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.

TABLE III. Substitution information.

Canceled AN part number 1/	Substitute part number
AN3217-1	M8805/62-1
AN3217-2	None

1/ The canceled part numbers are no longer acquirable; the substitute part has lower electrical ratings (see table I) and increased overtravel force (see operating characteristics). The canceled parts were rated at 28 V dc, 25 amperes resistive, 10 amperes inductive, and 10 amperes motor load. The maximum overtravel force was 7.5 pounds.

Review activity:
DLA - ES

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-N627)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:13Z
Check the source to verify that this is the current version before use.